ADOBE







For the most up-to-date product information, scan the QR code.

8" x 8" Floor/ Wall Tile in Nero 8" x 16" Floor/ Wall Tile in Nero







8" x 8" Floor/ Wall Tile in Rosa 8" x 16" Floor/ Wall Tile in Rosa



8.5" x 10" Hexagon Floor/ Wall Tile in Nero

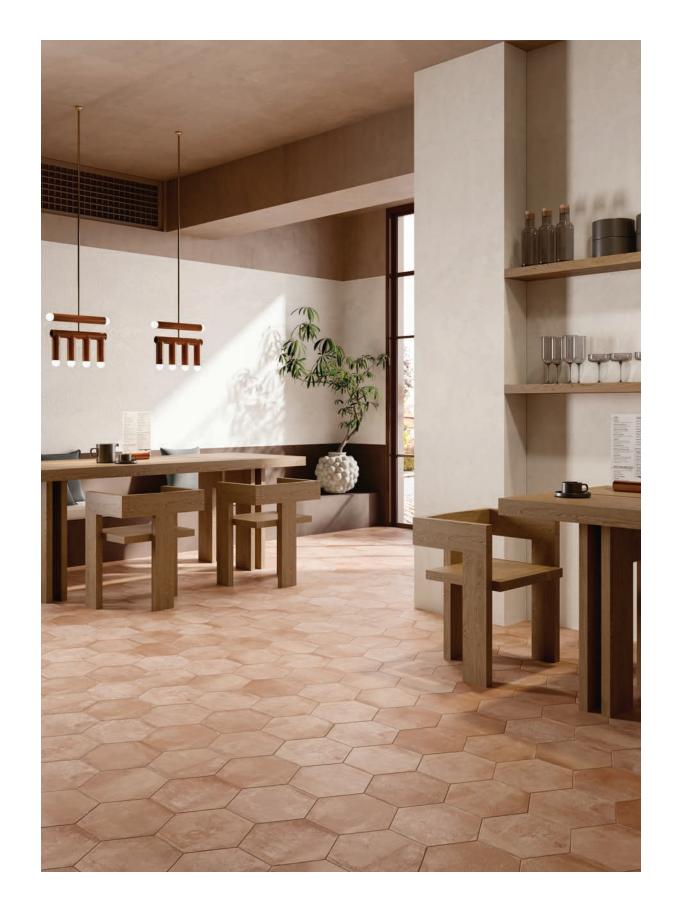

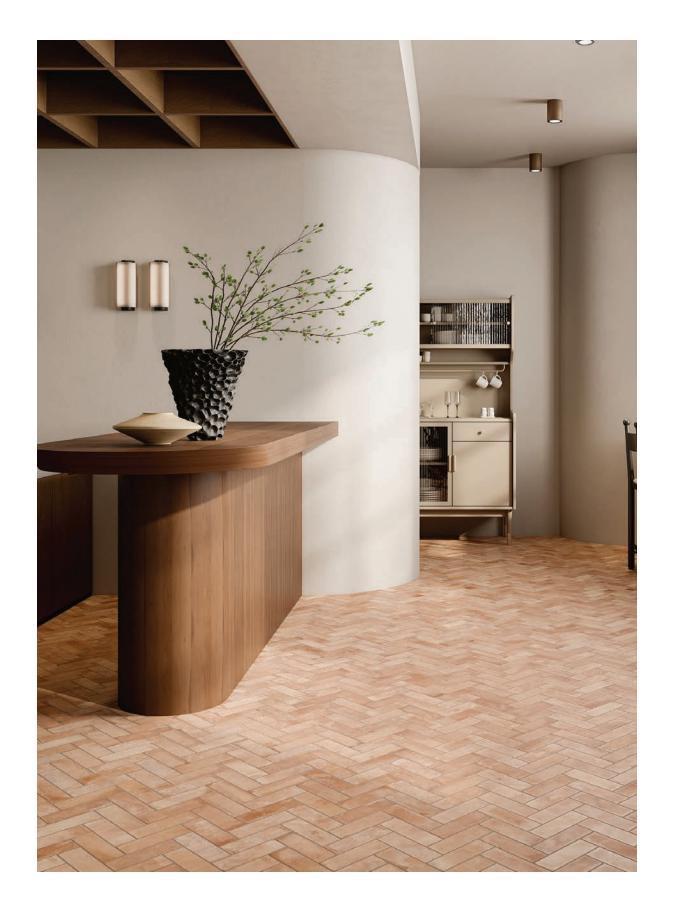

8.5" x 10" Hexagon Floor/ Wall Tile in Rosa

AVAILABLE STOCKED ITEMS:

9mm Floor/Wall Tiles - Pressed Edge			
SIZE	FINISH	COLORS	
2.5" x 8"	Matte	Avorio Rosa Cotto Nero	
9.5mm Floor/Wall Tiles - Pressed Edge			
SIZE	FINISH	COLORS	
8" x 8"	N.A	4 1 5 10 11	
8 X 8	Matte	Avorio Rosa Cotto Nero	
8.5" x 10" Hexagon	Matte	Avorio Rosa Cotto Nero Avorio Rosa Cotto Nero	

All Sizes are Nominal



8.5" x 10" Hexagon Floor/ Wall Tile in Cotto

COLORS:





Avorio






Cotto





Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

LAYOUT PATTERNS:

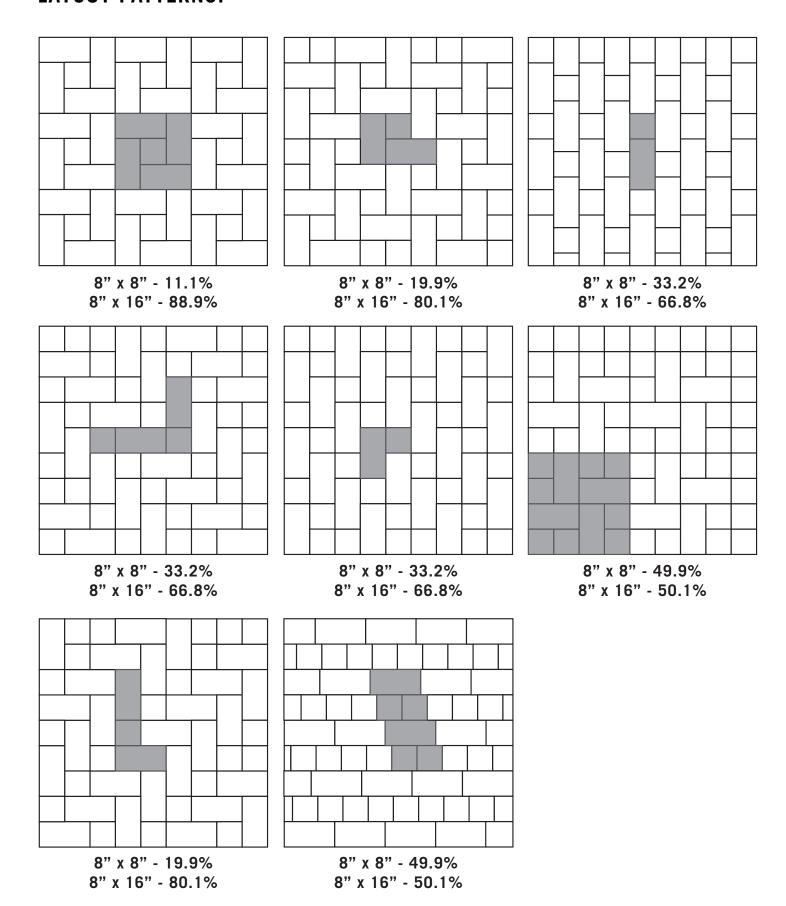



ADOBE

Color Body Porcelain Tile

V		Color Body Porcelain Tile
Features	Test Method	Value
Length and Width	ISO 10545 - 2	Compliant
Thickness		Compliant
Straightness of Sides		Compliant
Rectangularity		Compliant
Surface Flatness		Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Warpage		Compliant
Water Absorption	ISO 10545 - 3	< 0.5%
Modulus of Rupture / Bending Strength	100 10545 4	> 35 N/mm²
Breaking Strength	ISO 10545 - 4	> 1300 N
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	≥ GB
Chemical Resistance (Low Concentration)	130 10343 - 13	≥ LGB
Slip Resistance (Wet)	ANSI A326.3	DCOF 0.58
LEED	-	Yes
Recycled Content	-	> 20%
VOC Emissions	-	Zero VOC
Material Health Certification	-	Red List Free, Certificate Available
Environmental Product Declaration	-	Industry Wide
Health Product Declaration	-	Available
		·







• 9mm | 9.5mm Thicknesses • Frost Resistance - Yes

This product will contribute to USGBC registered LEED projects. It will also contrivute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

Matte Finish

- Color Body Porcelain Tile PEI Rating 4
- Pressed Edge

 - V4 Extreme Variation

www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com