

ALABASTER



For the most up-to-date product information, scan the QR code.

12" x 24" Floor/Wall Tile in Beige
10" x 30" Wall Tile in Verde



10" x 30" Wall Tile in Cinza



10" x 30" Wall Tile in Azul



10" x 30" Wall Tile in Cinza



12" x 24" Floor/Wall Tile in Beige



10" x 30" Wall Tile in Verde



12" x 24" Floor/Wall Tile in Beige
10" x 30" Wall Tile in Verde

AVAILABLE STOCKED ITEMS:

8mm Porcelain Floor/Wall Tiles - Rectified Edge			
SIZE	FINISH		COLORS
12" x 24"	Natural		Branco Cinza Beige Verde Azul
8mm Porcelain Floor/Wall Mosaics - Rectified Edge			
SHEET SIZE	TYPE	FINISH	COLORS
12" x 12"	2" x 2"	Natural	Branco Cinza Beige Verde Azul
12" x 12"	3" Hexagon		
12" x 12"	1" x 3" Herringbone		
9mm Ceramic Wall Tiles - Pressed Edge			
SIZE	FINISH		COLORS
10" x 30"	Glossy		Branco Cinza Beige Verde Azul
9mm Ceramic Wall Dimensional - Pressed Edge			
SIZE	TYPE	FINISH	COLORS
10" x 30"	Razor	Glossy	Branco Cinza Beige Verde Azul
8mm Ceramic Trim Pieces - Pressed Edge			
SIZE	TYPE	FINISH	COLORS
3" x 10"	Bullnose	Glossy	Branco Cinza Beige Verde Azul

All Sizes are Nominal.

WALL DIMENSIONAL COLORS:



Azul



Beige



Branco



Cinza



Verde

COLORS:



Azul



Branco



Verde



Beige




Cinza

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

3” HEXAGON MOSAIC:




Azul

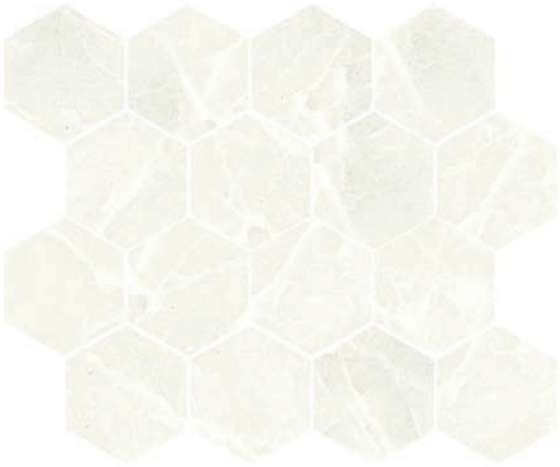

Branco



Verde

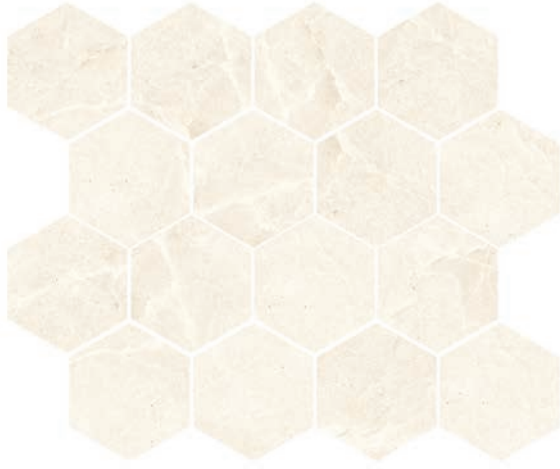

Beige



Cinza

1” X 3” HERRINGBONE MOSAIC:




Azul



Branco



Verde

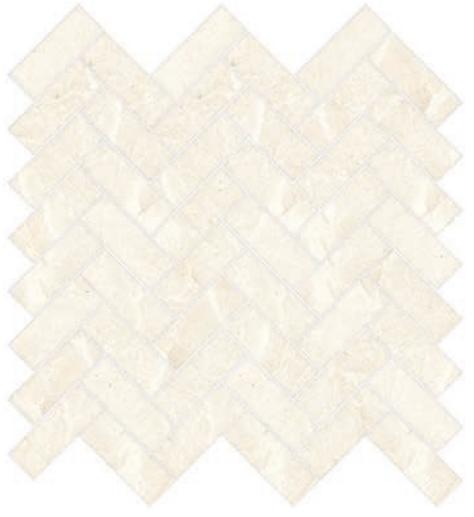

Beige



Cinza

Features	Test Method	Value
Length and Width	ISO 10545 - 2	±2.00%
Thickness		±5%
Straightness of Sides		-0.20%/+0.40%
Rectangularity		-0.20%/+0.40%
Surface Flatness		-0.20%/+0.40%
Surface Quality		Min. 95% of tiles free of visible defects
Warpage		-0.20%/+0.40%
Wedging		+0.40%
Water Absorption	ISO 10545 - 3	18.0% ≤ Eb < 20.0%
Modulus of Rupture / Bending Strength	ISO 10545 - 4	≥ 13 N/mm²
Breaking Strength		≥ 660 N
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	6.0 - 8.0 x 10-6 °K-1
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ASTM C1378	GA
Chemical Resistance (Low Concentration)		GLA
Chemical Resistance (High Concentration)		Required
Fire Resistance	-	A1/A1fl
Recycled Content	-	≤ 15%
LEED	-	Yes
Environmental Product Declaration	-	Yes
Greenguard	-	Greenguard Gold
VOC Emissions	-	Zero VOC
 This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8” wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16” wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Ceramic Tile
- Glossy Finish
- 8mm | 9mm Thicknesses
- Pressed Edge
- V2 - Slight Variation
- Not Frost Resistant



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

Features	Test Method	Value
Dimensions	ISO 10545 - 2	Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Warpage		Compliant
Wedging		Compliant
Water Absorption	ISO 10545 - 3	≤ 0.5%
Modulus of Rupture / Bending Strength	ISO 10545 - 4	≥ 38 N/mm²
Breaking Strength		≥ 1430 N
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	6.0 - 7.0 x 10-6 K-1
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	GA
Chemical Resistance (Low Concentration)		GLA
Chemical Resistance (High Concentration)		Required
Fire Resistance	-	A1/A1fl
Slip Resistance (Wet)	ANSI A326.3	DCOF 0.44
Recycled Content	-	≤ 15%
LEED	-	Yes
Environmental Product Declaration	-	Yes
Greenguard	-	Greenguard Gold
VOC Emissions	-	Zero VOC
 This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8” wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16” wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

- Product Info:**
 - Glazed Porcelain Tile
 - Natural Finish
 - 8mm Thickness
 - Rectified Edge
 - V2 - Slight Variation
 - Frost Resistant



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

