
ALCHEMY








4"x8" Wall Tile in Flux Matte 24"x48" Field Tile in Flamed Copper Metal Lucidato

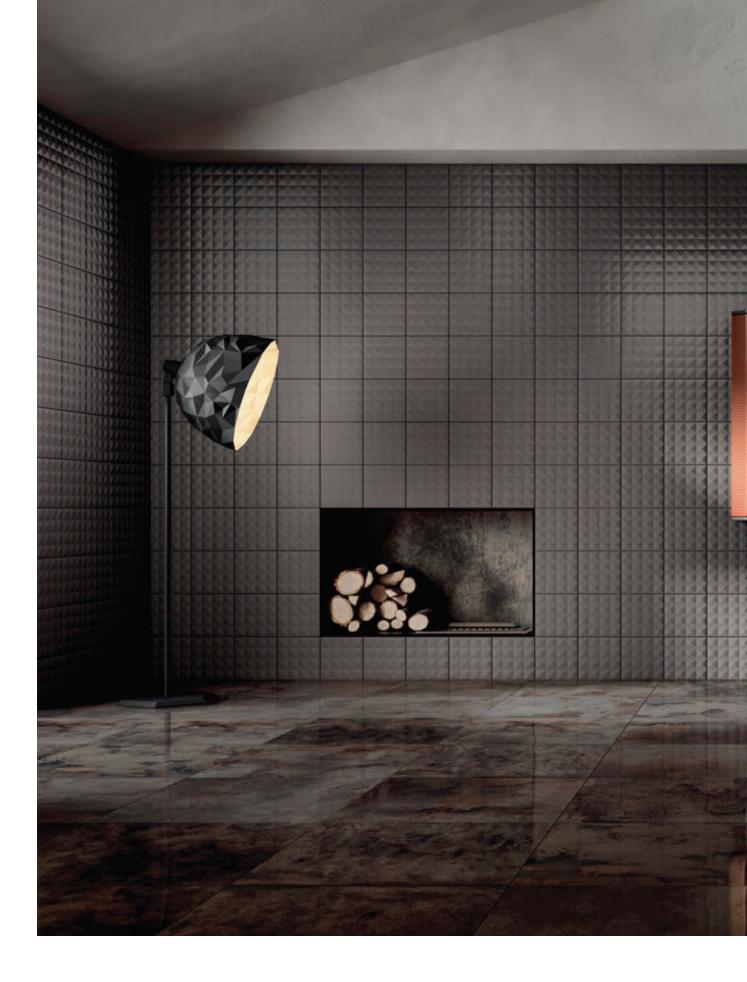

24"x24" Field Tile in Dark Brass Metal Lucidato

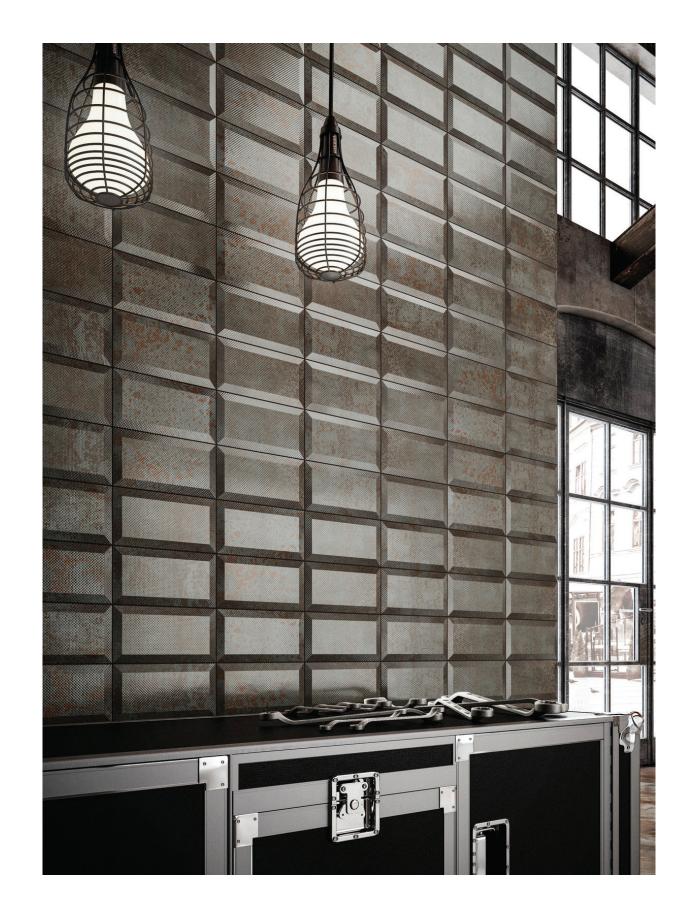



24"x48" Field Tile in Russet Metal Matte 4"x8" Wall Tile in Flux Matte 24"x48" Field Tile in Flamed Copper Metal Lucidato





24"x48" Field Tile in Russet Metal Matte

AVAILABLE IN:

9mm Field Tile

Dark Russet in Metal Matte	Dark Russet in Metal Perf Lappato	Dark Brass Flamed Copper in Metal Lucidato
24"x48" 12"x48" 24"x24" 12"x24"	24"x48" 12"x48" 24"x24" 12"x24"	24"x48" 12"x48" 24"x24"

Baseboard

3"x24"

Trim Pieces

3"x24"	Baseboard	3"x24"	Baseboard
12"x24"	Step	12"x24"	Step

72 X24 Step

9mm Wall Tile

4"x8" in Matte: Flux | Gloom | Reddish | Tinny | Wolf

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD	TILES	CU	BES	BASKET	WEAVE
	Any 24" field tile		2" 4"		1 ³ / ₈ "x3" 2"x4"
	a smaller size in any length and width	BRI	CKS	DIAM	ONDS
	combination with a 1" minimum.		1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD S	SHAPES*	CHEV	RONS	HERRIN	IGBONE
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
○ Diamond	4"			* * * * * * * * * * * * * * * * * * * *	⁵ / ₈ "x4"
		OCTAGONS		HEXA	GONS
— Hexagon	6"		2"		41/ 11
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZO	ID W/ DOT	SQU	ARES	RECTA	NGLES
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

FIELD TILE



Dark Brass Metal Lucidato



Flamed Copper Metal Lucidato



Dark Metal Matte



Dark Metal Perf Lappato



Russet Metal Matte




Russet Metal Perf Lappato

WALL TILE



Flux Matte



Gloom Matte



Reddish Matte



Tinny Matte



Wolf Matte



⁻ All sizes are nominal



ALCHEMYColor Body Porcelain Tile

Features	Test Method	Value
Length And Width	ISO 10545-2	±0.2%
Thickness	ISO 10545-2	±5%
Warpage of Edges	ISO 10545-2	±0.2%
Wedging	ISO 10545-2	±0.2 %
Warpage	ISO 10545-2	±0.2%
Water Absorption	ISO 10545-3	≤ 0.1%
Modulus of Rupture	ISO 10545-4	50 N/MM ²
Breaking Strength	ISO 10545-4	≥ 1700 N
Coefficient of Linear Thermal Expansion	ISO 10545-8	6.5 x10 ⁻⁶ °C ⁻¹
Thermal Shock Resistance	ISO 10545-9	Resistant
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance	ISO 10545-13	Min. GB
Stain Resistance	ISO 10545-14	Min. Class 3

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.



- Color Body Porcelain Tile
- Matte | Lappato | Lucidato Finishes
- 9mm Thickness
- Rectified Edge
- PEI Rating = 4
- V3 Moderate Shading Variation
- Frost Resistance = Yes





Features	Test Method	Value
Length And Width	ISO 10545-2	±0.5%
Thickness	ISO 10545-2	±5%
Warpage of Edges	ISO 10545-2	±0.3%
Wedging	ISO 10545-2	±0.4 %
Warpage	ISO 10545-2	±0.3%
Water Absorption	ISO 10545-3	~16%
Coefficient of Linear Thermal Expansion	ISO 10545-8	8x10 ⁻⁶ °C ⁻¹
Thermal Shock Resistance	ISO 10545-9	Resistant
Crazing Resistance	ISO 10545-12	Resistant
Chemical Resistance	ISO 10545-13	Min. GB
Stain Resistance	ISO 10545-14	Min. Class 3

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Glazed Ceramic Tile
- Matte Finish
- 8.5mm Thickness
- Rectified Edge
- V2 Slight Shading Variation
- Frost Resistance = No



www.genrose.com



www.genrose.com