
## **AMAZON**







For the most up-to-date product information, scan the QR code.

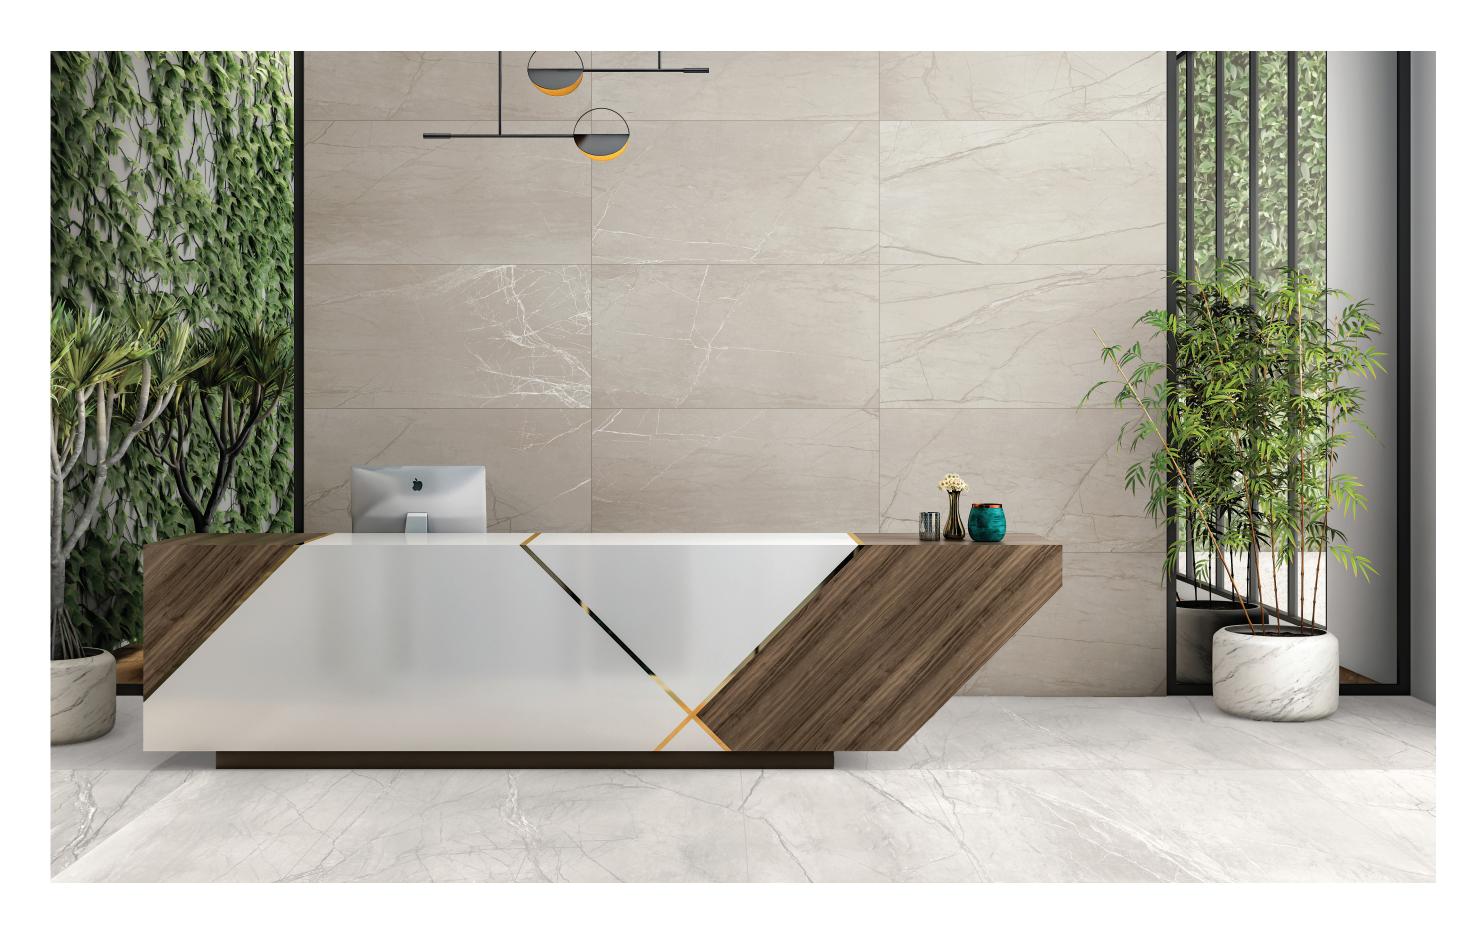

#### **AVAILABLE STOCKED ITEMS:**

8.5mm Field Tiles - Rectified Edge							
SIZE	FINISH		COLORS				
12" x 24"	Carved		Silver   Blond   Taupe   Coal				
24" × 48"	Carved		Silver   Blond   Taupe   Coal				
8.5mm Mosaics - Rectified Edge							
SHEET SIZE	MOSAIC TYPE	FINISH	COLORS				
12" x 12"	2" Hexagon	Carved	Silver   Blond   Taupe   Coal				

All Sizes are Nominal.

#### **COLORS:**



Silver



Blond

Coal



Taupe

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

### 2" HEXAGON MOSAIC:









Silver

**Blond** 

Taupe

Coal

# MADE TO ORDER FIELD TILES AND MOSAICS: Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any		2" 4"		1³/ <sub>8</sub> "x3" 2"x4"
	length and width	BRICKS		DIAMONDS	
	combination with a 1" minimum.		1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" <sup>5</sup> / <sub>8</sub> "x4"
Diamond	4"			* > >	
		OCTAGONS		HEXAGONS	
\(\rightarrow\) Hexagon	6"		2"	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	11/ //
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"

<sup>\*</sup>Other sizes available upon request

V2



24" x 48" Field Tile in Coal



#### **AMAZON**

Color Body Porcelain Tile

Features	Test Method	Value				
Dimentions	100 10545 2	Compliant				
Surface Quality	ISO 10545 - 2	Min. 95% of tiles free of visible defects				
Water Absorption	ISO 10545 - 3	0.0295%				
Modulus of Rupture / Bending Strength	ISO 10545 - 4	36.04 N/mm²				
Breaking Strength	130 10343 - 4	1,864.7 N				
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	2.49 x 10 <sup>-6</sup>				
Thermal Shock Resistance	ISO 10545 - 9	Resistant				
Crazing Resistance	ISO 10545 - 11	Resistant				
Chemical Resistance (Domestic)		А				
Chemical Resistance (Low Concentration)	ISO 10545 - 13	LA				
Chemical Resistance (High Concentration)		НА				
Fire Resistance	-	A1/A1 <sub>FL</sub>				
Slip Resistance	ANSI A326.3	DCOF 0.46				
VOC Emissions	-	Zero VOC				

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Disclaimer:** DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

#### **Product Info:**

- Color Body Porcelain Tile
- Carved Finish
- 8.5mm Thickness
- Rectified Edge
- V2 Slight Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com