

# AURORA

 GENROSE





12"x35" Wall Tile in Light Grey  
24"x48" Field Tile in Light Grey



12"x35" Wall Tile in Light Blue  
24"x24" Field Tile in Light Blue



24"x48" Field Tile in Light Green



12"x35" Wall Tile in Ivory  
24"x24" Field Tile in Ivory

# AVAILABLE IN:

## 9.6mm Field Tiles

Rectified Edge

12"x24" Semi Polished Finish

24"x24" Semi Polished Finish

24"x48" Semi Polished Finish

## 10mm Wall Tile

12"x35" Semi Polished Finish


## Mosaics

2"x2" Mosaic Semi Polished Finish

8"x11" Chevron Mosaic Semi Polished Finish

## Trim Piece

0.6"x12" Pencil Semi Polished Finish










- All sizes are NOMINAL


# MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2"x12"		1"x2" 2"x4" 5/8"x4"
	Diamond 4"			HEXAGONS	
	Hexagon 6"	OCTAGONS			1 <sup>1</sup> / <sub>8</sub> " 2"
	Chevron 2"x12" 6"x24"		2" w/ 0.6" Squares		
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ 5/8" Dot		1"x1" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 2"x2" 3"x3"		1"x2" 1"x4"

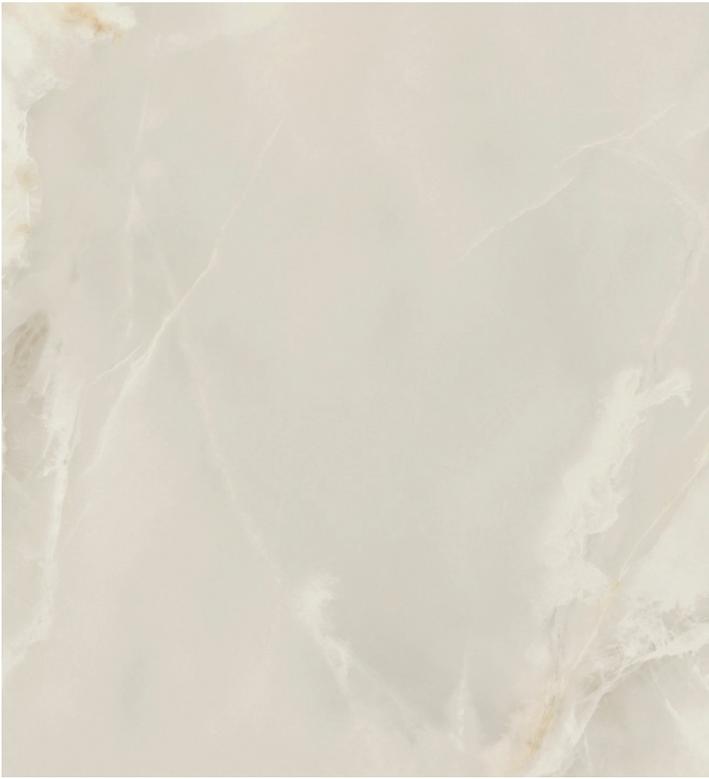\*Other sizes available upon request



**Ivory**



**Light Grey**



**Light Green**



**Light Blue**

Colors shown may vary from actual product. Final selection should be made from actual product samples.

## 2"X2" MOSAIC



Ivory



Light Grey



Light Green



Light Blue

## 8"X11" CHEVRON MOSAIC



Ivory



Light Grey



Light Green



Light Blue



24"x48" Field Tile in Light Grey



12"x35" Wall Tile in Ivory  
24"x48" Field Tile in Ivory

Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.3mm ± 0.09% / ± 0.03%
Thickness		± 0.2mm ± 1.7%
Straightness of Sides		± 0.5mm ± 0.16% / ± 0.06%
Rectangularity		± 0.5mm ± 0.16% / ± 0.06%
Surface Flatness		+ 0.9mm / - 0.5mm + 0.10% / - 0.06%
Center Curvature		+ 0.9mm / - 0.5mm + 0.33% / - 0.16% + 0.9mm / - 0.5mm + 0.10% / - 0.06%
Edge Curvature		+ 0.9mm / - 0.5mm + 0.10% / - 0.05%
Warpage		+ 0.9mm / - 0.5mm + 0.10% / - 0.05%
Water Absorption		ISO 10545-3
Breaking Strength	ISO 10545-4	≥ 600 N
Modulus of Rupture		≥ 15 N/mm <sup>2</sup>
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13	Min. Type GLB
Resistance to High Concentrations of Acids and Alkalis		Min. Type GHB
Resistance to Domestic Cleaning Products		Min. Type GA
Resistance to Household Chemicals and Swimming Pool Salts		Min. Type GA
Stain Resistance	ISO 10545-14	Min. Type 3
Recycled Content	-	Min. 40%

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Ceramic Tile
- Semi Polished Finish
- 10mm Thickness
- Rectified Edge
- V3 - Moderate Variation
- Frost Resistance = No

Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.3mm ± 0.3% / ± 0.5%
Thickness		± 0.2mm ± 2.1%
Straightness of Sides		± 0.5mm ± 0.6% / ± 0.11%
Rectangularity		± 0.5mm ± 0.6% / ± 0.11%
Surface Flatness		+ 1.2mm / - 0.5mm + 0.18% / - 0.08%
Center Curvature		
Edge Curvature		
Warpage		
Water Absorption		ISO 10545-3
Breaking Strength	ISO 10545-4	≥ 1300 N
Modulus of Rupture		≥ 35 N/mm <sup>2</sup>
Abrasion Resistance	ISO 10545-7	4
Frost Resistance	ISO 10545-12	Required
Fire Resistance	EN -14411	A1
Resistance to Low Concentrations of Acids and Alkalis	ISO 10545-13	Min. Type GLB
Resistance to High Concentration of Acids and Alkalis		Min. Type GHB
Resistance to Domestic Cleaning Products		Min. Type GA
Resistance to Household Chemicals and Swimming Pool Salts		Min. Type GA
Stain Resistance	ISO 10545-14	Min. Type 3
Recycled Content	-	Min. 38%

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Glazed Porcelain Tile
- Semi Polished Finish
- 9.6mm Thickness
- Rectified Edge
- PEI Rating = 4
- V3 - Moderate Variation
- Frost Resistance = Yes





[www.genrose.com](http://www.genrose.com)