

BRICK HAUS



For the most up-to-date product information, scan the QR code.

6" x 15.6" Wall Tile in Beige



6" x 16" Wall Tile in Grey

AVAILABLE STOCKED ITEMS:


9mm Wall Tiles - Rectified Edge		
SIZE	FINISH	COLORS
6" x 15.6"	Natural	White Mix Grigio Antracite Rock Mix
6" x 16"	Natural	Beige Grey Multicolor

All Sizes are Nominal.



6" x 15.6" Wall Tile in Rock Mix


COLORS:

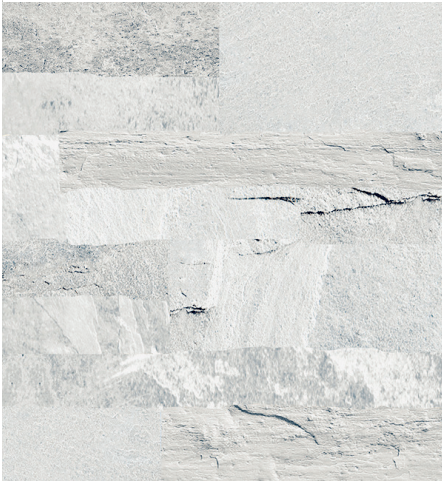

White Mix



Grigio

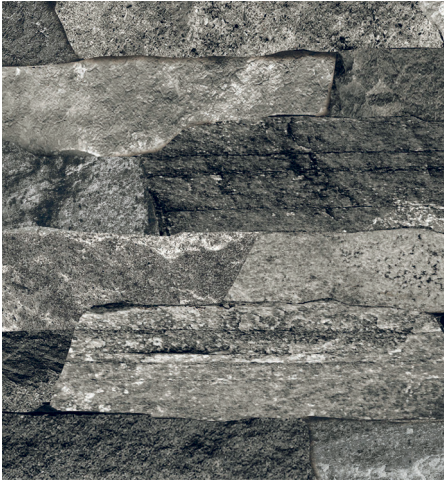

Antracite



Rock Mix



Beige



Grey





Multicolor

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



6" x 15.6" Breccia in Antracite

Features	Test Method	Value
Dimensions	ASTM C499	Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Water Absorption	ASTM C373	≤ 0.5%
Modulus of Rupture/ Bending Strength	ASTM C648	> 35 N/mm
Coefficient of Linear Thermal Expansion	ISO 10545 - 9	< 7.1 x 10 ⁻⁶ °C ⁻¹
Thermal Shock Resistance	ISO 10545 - 11	Resistant
Crazing Resistance	ISO 10545 - 12	Resistant
Chemical Resistance (Domestic)	ASTM C650	A
Chemical Resistance (Low Concentration)		LA
Chemical Resistance (High Concentration)		HA
LEED	-	Yes
VOC Emissions	-	Zero VOC
Recycled Content	-	≥ 40%
<div><div></div><div>This product will contricute to USGBC registered LEED projects. It will also contricute to the ANSI approved NAHB Green Building Standard ICC 700.</div></div>		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

- Product Info:
- Glazed Porcelain Tile
 - Natural Finish
 - 9mm Thickness
 - Rectified Edge
 - V4 - **EXTREME** Variation
 - Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com