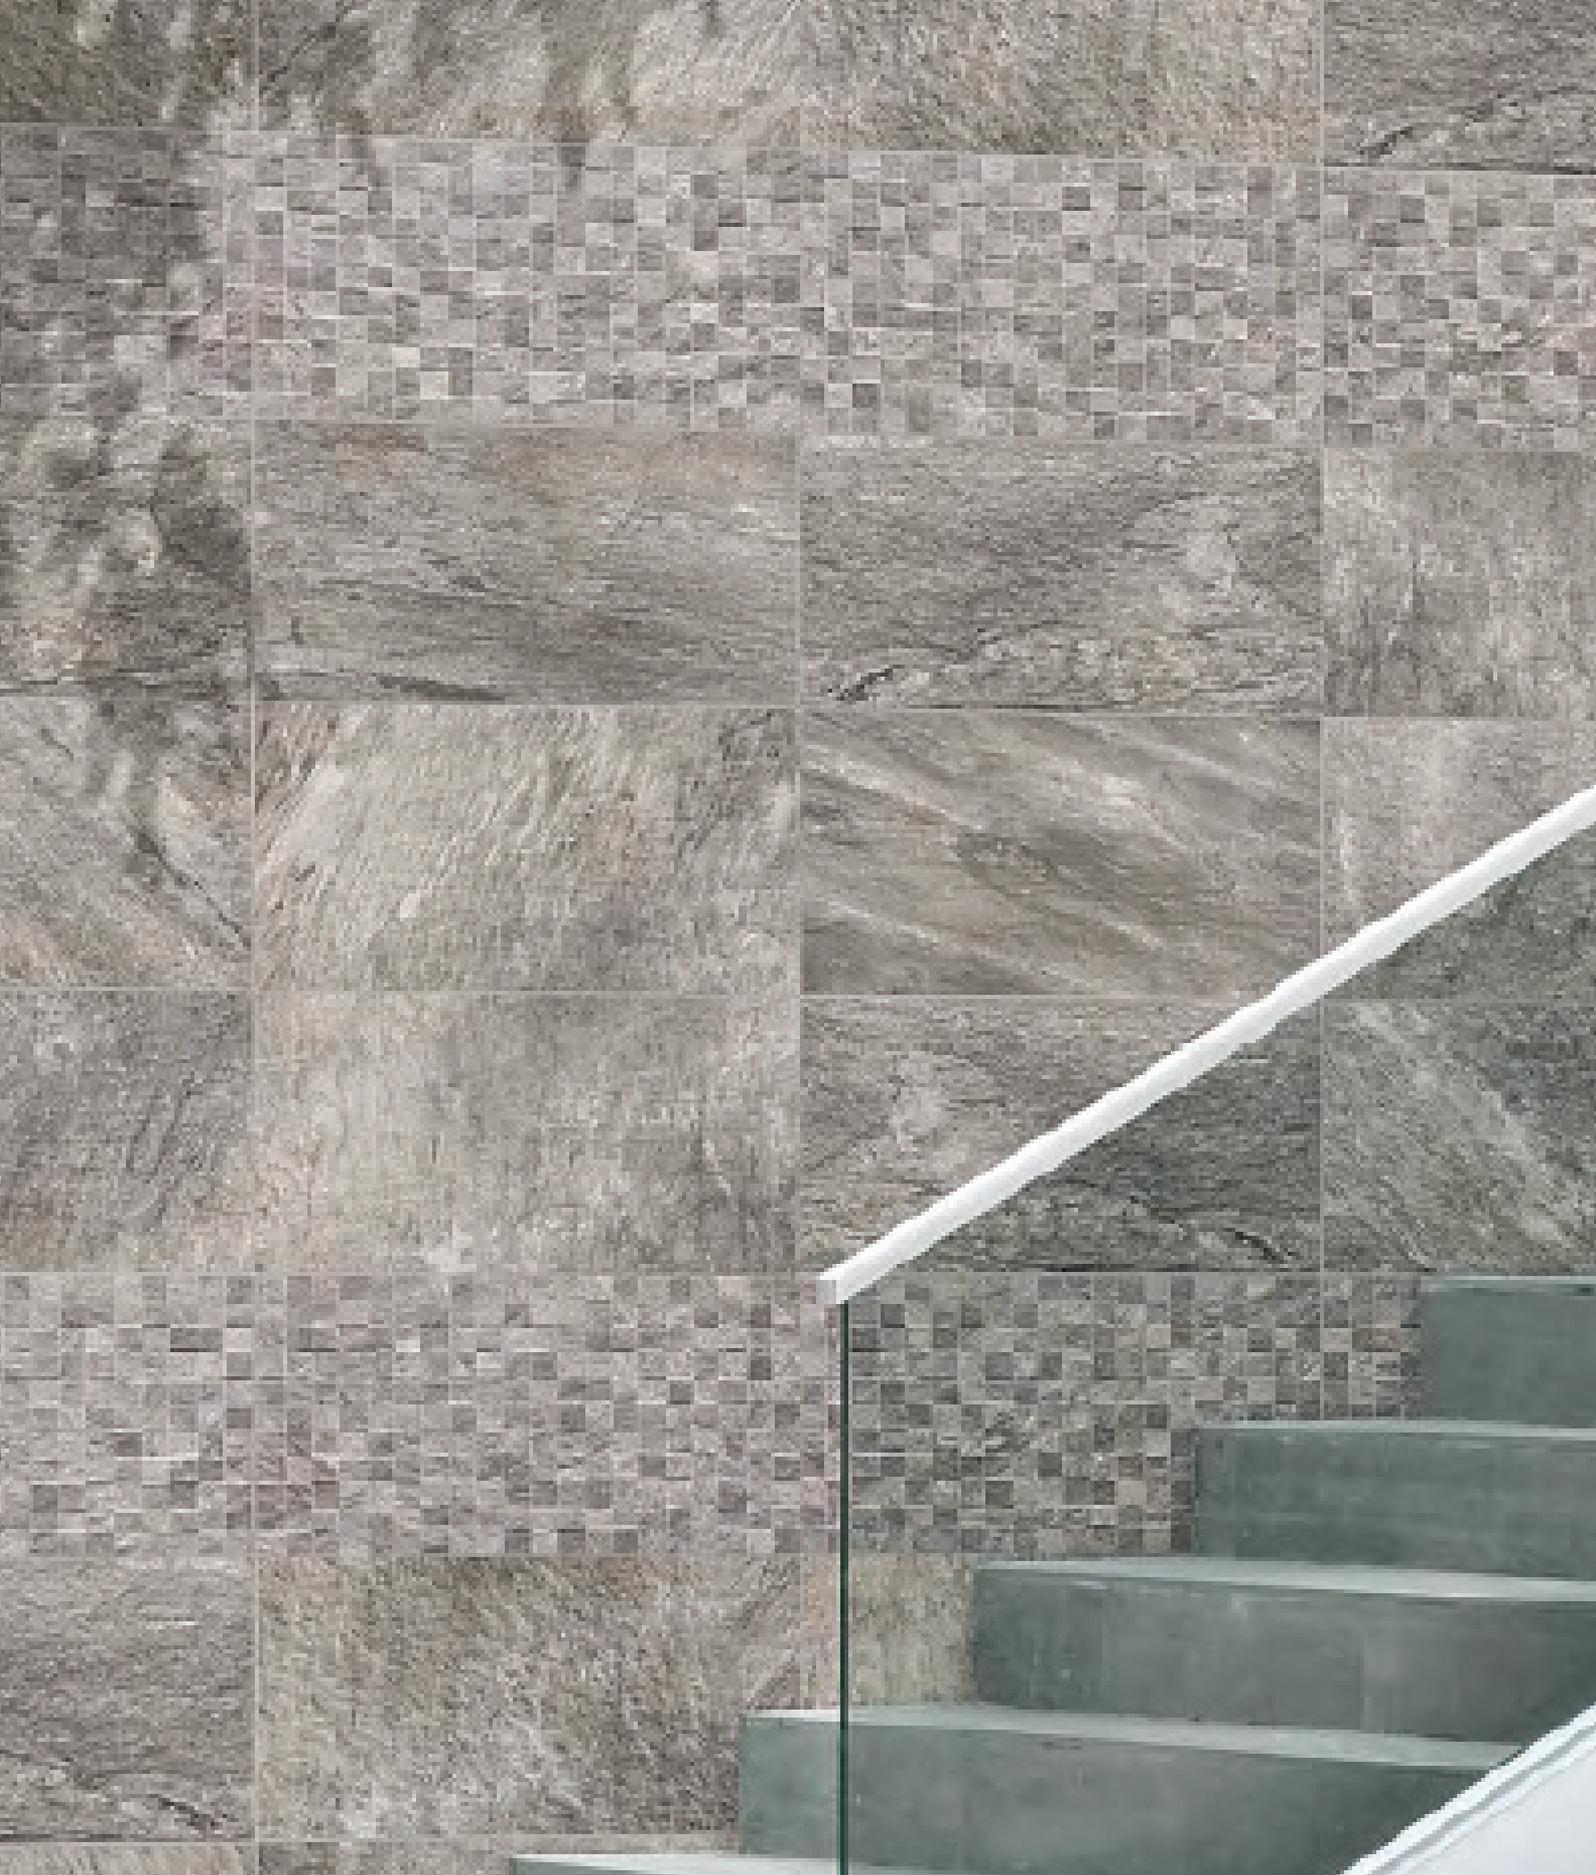


**CABIN**





12"x22" Field Tile in Natural



# AVAILABLE IN:

## Field Tiles

3"x12" *Matte Finish*








12"x22" *Matte Finish*

- All sizes are NOMINAL

# MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2"x12"		1"x2" 2"x4" 5/8"x4"
	Diamond 4"				
	Hexagon 6"	OCTAGONS		HEXAGONS	
	Chevron 2"x12" 6"x24"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ 5/8" Dot		1"x1" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 2"x2" 3"x3"		1"x2" 1"x4"

\*Other sizes available upon request



**Natural**



**Marron**



12"x22" Field Tile in Marron

Features	Test Method	Value		
Average Size	ISO 10545-2	± 0.9 mm	± 0.6%	± 2.0 mm
Thickness		± 0.5 mm	± 5%	± 0.5 mm
Straightness of Sides		± 0.75 mm	± 0.5%	± 1.5mm
Orthogonality		± 0.75 mm	± 0.5%	± 2.0 mm
Flatness of the Surface				
Surface Aspects		Min 95%		
Water Absorption	ISO 10545-3	$E_b \leq 0.5\%$ Individual Maximum 0.6%		
Breaking Force	ISO 10545-4	Min. 1300 N		
Bending Strength		Min. 700 N		
		Min. 35 N/mm <sup>2</sup>		
Deep Abrasion Resistance	ISO 10545-6	Max. 175 mm <sup>3</sup>		
Resistance to Thermal Shock	ISO 10545-9	Resistant		
Resistance to Cracking	ISO 10545-11			
Frost Resistance	ISO 10545-12			
Chemical Resistance to Household Products and Salts for Swimming Pools	ISO 10545-13	Min. Class B		
Stain Resistance	ISO 10545-14	Min. Class 3		
Small Color Differences	ISO 10545-16	Glazed Tiles	Unglazed Tiles	
		$\Delta E_{CMC} < 0.75$	$\Delta E_{CMC} < 1.0$	
Reaction to Fire	-	(Class A1 or A1 <sub>FL</sub> ) <sup>m</sup>		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Glazed Porcelain Tile
- Matte Finish
- PEI Rating = 4
- V4 - **EXTREME** Variation
- Frost Resistance = Yes





[www.genrose.com](http://www.genrose.com)