# **CHICAGO BRICK**










4" x 8" Floor/Wall Tile in Old Chicago



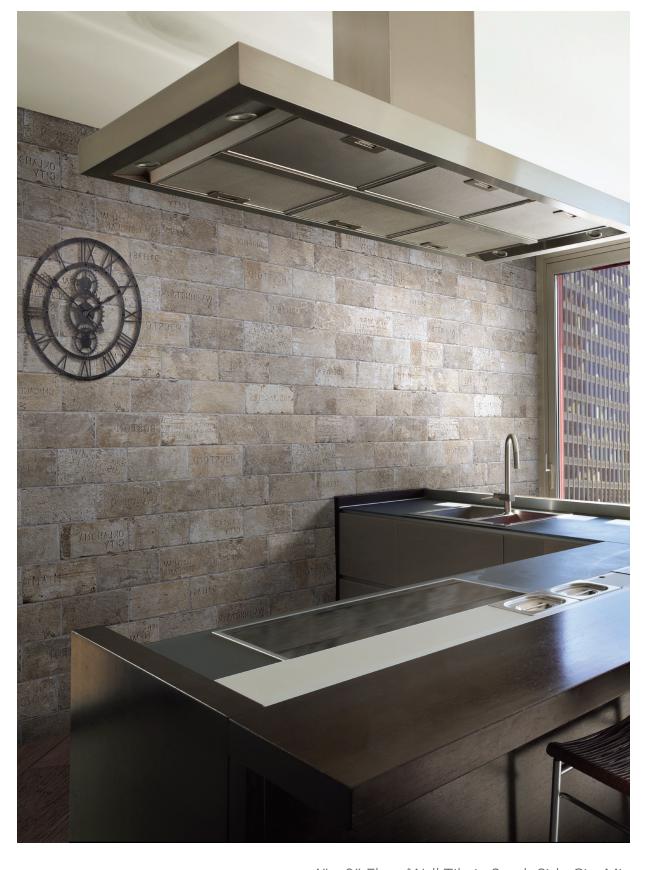

9" x 11" Hexagon Floor/Wall Tile in South Side

4" x 8" Floor/Wall Tile in South Side City Mix





4" x 8" Floor/Wall Tile in South Side City Mix


#### **AVAILABLE STOCKED ITEMS:**

10.5mm Floor/Wall Tiles - Pressed Edge					
SIZE	TYPE	FINISH	COLORS		
4" × 8"	-	Natural	South Side   Wrigley   Old Chicago   State Street		
4" × 8"	City Mix	Natural	South Side   Wrigley   Old Chicago   State Street		
9" x 11"	Hexagon	Natural	South Side   Wrigley   Old Chicago   State Street		
10.5mm Mosaics - Pressed Edge					
SHEET SIZE	TYPE	FINISH	COLORS		
12" x 16"	3" x 3"	Natural	South Side   Wrigley   Old Chicago   State Street		
10.5mm Trim Pieces - Pressed Edge					
SIZE	TYPE	FINISH	COLORS		
3" x 16"	Bullnose	Natural	South Side   Wrigley   Old Chicago   State Street		
4" x 2" x 5"	Wall Corner	Natural	South Side   Wrigley   Old Chicago   State Street		
4" × 16"	Stairtread	Natural	South Side   Wrigley   Old Chicago   State Street		

## **SPECIAL ORDER ITEMS:**

10.5mm Floor/Wall Tiles - Pressed Edge				
SIZE	FINISH	COLORS		
8" × 8"	Natural	South Side   Wrigley   Old Chicago   State Street		
8" × 16"	Natural	Wrigley   State Street		
16" x 16"	Natural	South Side   Wrigley   Old Chicago   State Street		

All Sizes are Nominal.

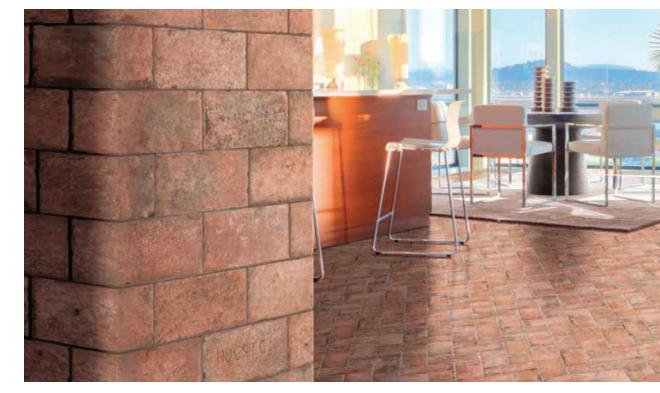

#### 4" x 8" Floor/Wall Tile in Wrigley

## **COLORS:**



CANADA CARLAMANA CITY

CANADA CARLAMANA CARLAMANA CITY

CANADA CARLAMANA CARLAMANA CARLAMANA CITY

CANADA CARLAMANA CARLA



South Side

South Side City Mix

Wrigley







Wrigley City Mix

Old Chicago

Old Chicago City Mix





**State Street** 

**State Street City Mix** 

## 3" X 3" MOSAIC



South Side




Wrigley



Old Chicago



**State Street** 

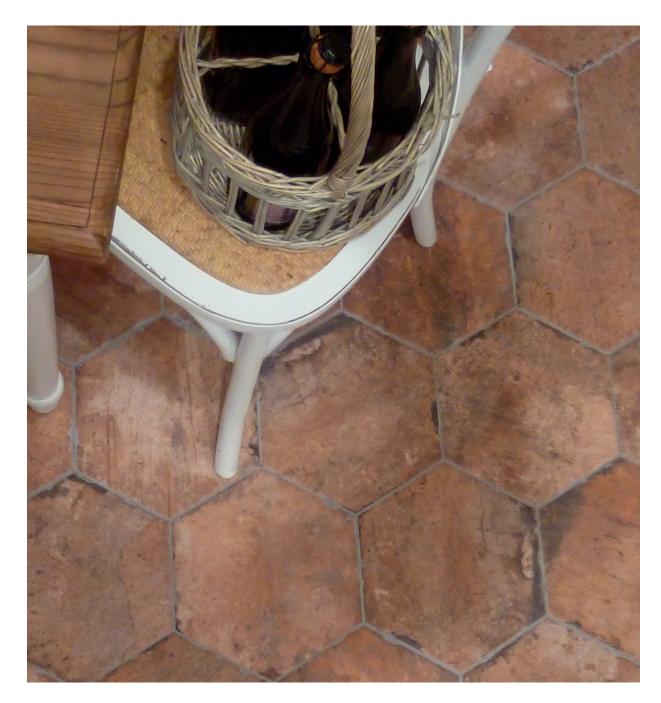

9" x 11" Hexagon Floor/Wall Tile in Old Chicago



#### **CHICAGO BRICK**

Glazed Porcelain Tile

Features	Test Method	Value
Length and Width		± 0.5%
Thickness	-	± 5%
Straightness of Sides	ISO 10545 - 2	± 0.5%
Rectangularity		± 0.5%
Surface Flatness		± 0.5% max
Surface Quality		Min. 95% of tiles free of visible defects
Water Absorption	ISO 10545 - 3	E ≤ 0.3%
Modulus of Rupture / Bending Strength	- ISO 10545 - 4	R≥ 35 N/mm²
Breaking Strength	150 10545 - 4	S≥ 1300 N
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	6.4 × 10 <sup>-6</sup> °C <sup>-1</sup>
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	GA
Chemical Resistance (Low Concentration)	130 10343 - 13	GLA
Fire Resistance	-	A1/A1 <sub>FL</sub>
Slip Resistance	ANSI A326.3	DCOF 0.65
LEED	-	Yes
Recycled Content	-	5.22%
VOC Emissions	-	Zero VOC
Environemental Product Declaration	-	Facility-Specific







It will also contricute to the ANSI approved NAHB Green Building Standard ICC 700.

This product will contricute to USGBC registered LEED projects.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Disclaimer:** DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

#### **Product Info:**

- Glazed Porcelain Tile
- Natural Finish
- 10.5mm Thicknesses
- PEI Rating = 5
- V4 **Extreme** Variation
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com