

CHICAGO BRICK






4"x8" Field Tile in Old Chicago



4"x8" City Mix in State Street



9"x11" Hexagon Field Tile in South Side

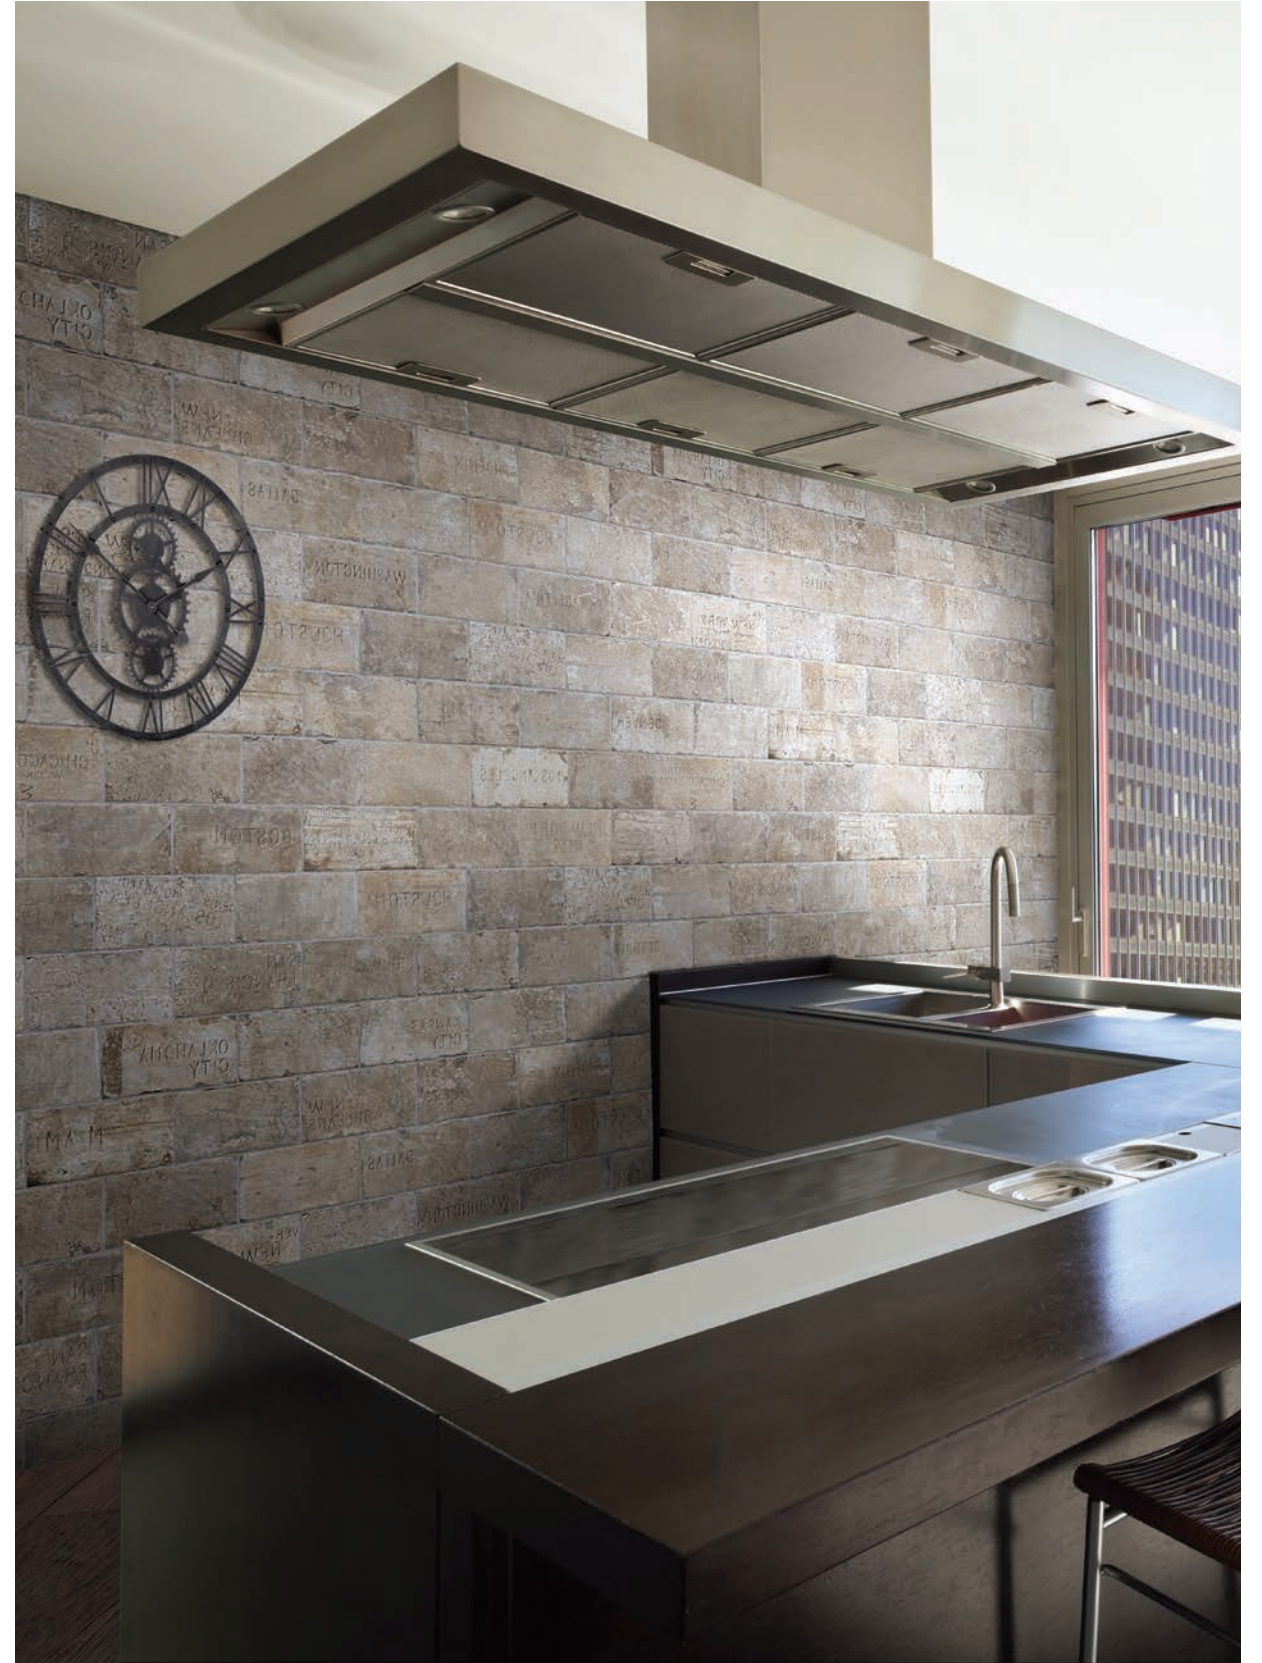

4"x8" City Mix in South Side



4"x8" City Mix in South Side



4"x8" | 8"x16" Field Tile in South Side

AVAILABLE IN:

10.5mm Field Tiles

- 4"x8" Natural Finish
- 8"x8" Natural Finish
- 8"x16" Natural Finish
- 9"x11" Hexagon Natural Finish
- 16"x16" Natural Finish



Trim Pieces

- 3"x16" Bullnose Natural Finish
- 4"x2"x5" Wall Corner Natural Finish
- 4"x16" Stairtread Natural Finish

Mosaic

- 3"x3" Mosaic Natural Finish

- All sizes are NOMINAL

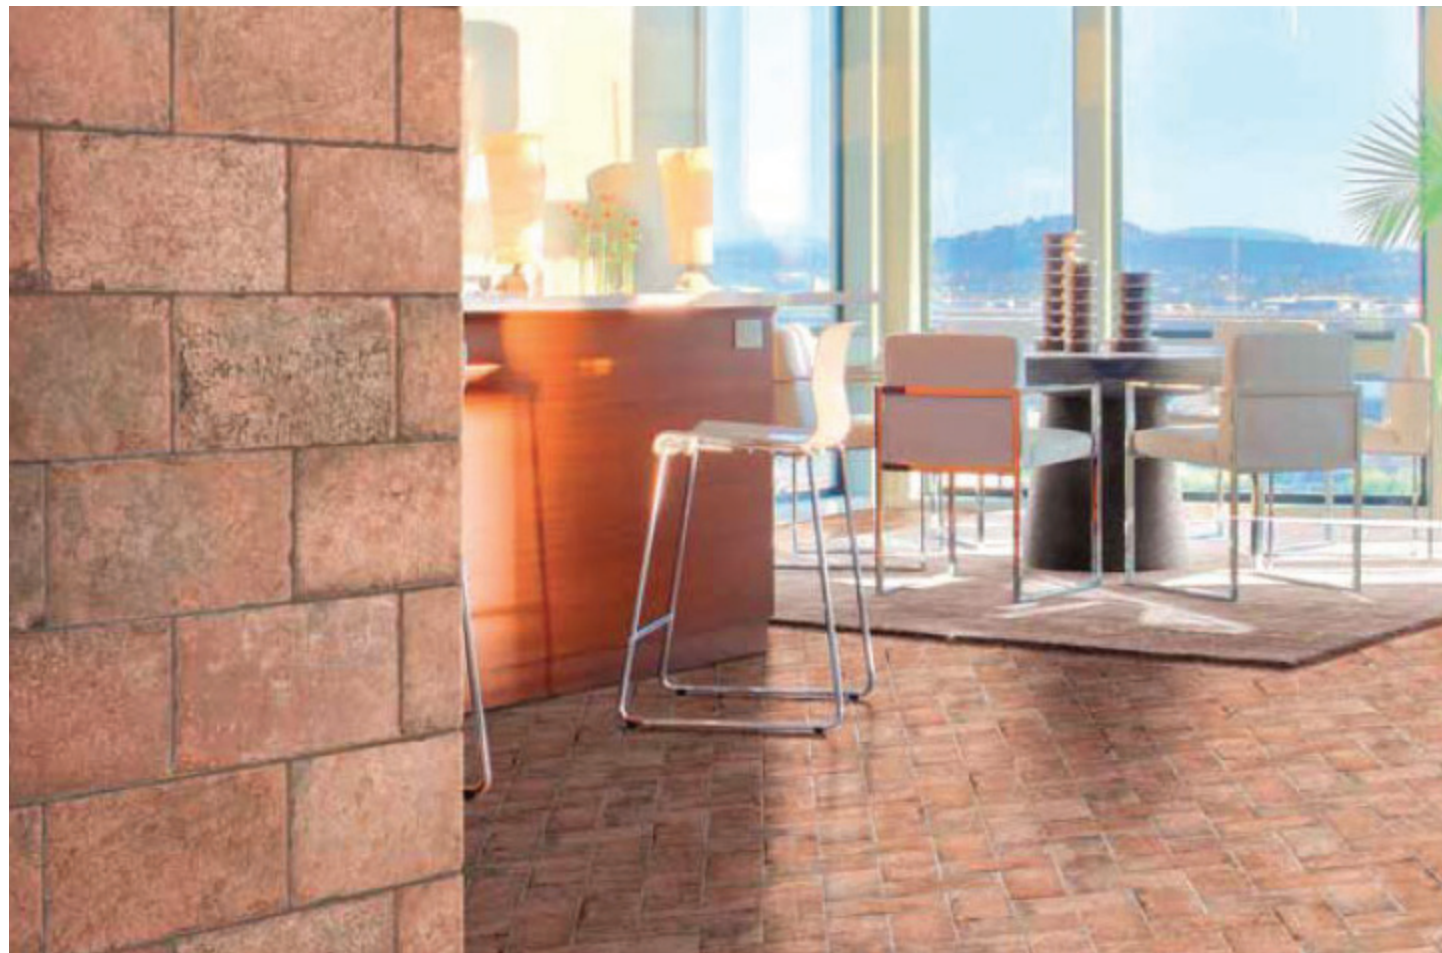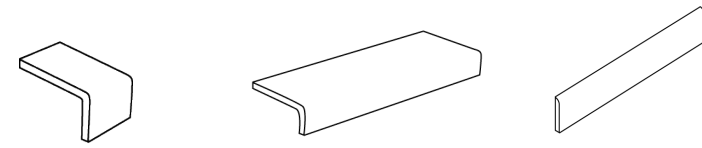

4"x8" Field Tile in Wrigley



South Side



South Side City Mix



Wrigley



Wrigley City Mix




Old Chicago



Old Chicago City Mix



State Street

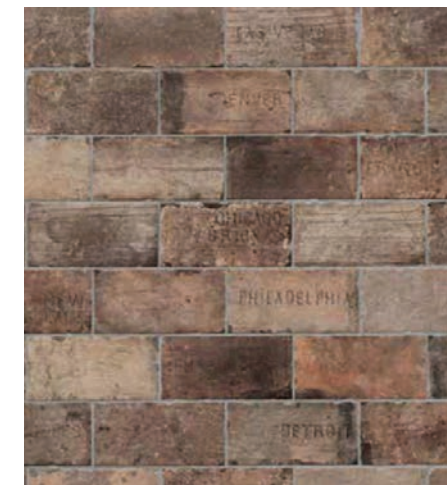

State Street City Mix

Colors shown may vary from actual product. Final selection should be made from actual product samples.

3"X3" MOSAIC



South Side



Wrigley



Old Chicago



State Street



9"x11" Hexagon Field Tile in Old Chicago

Features	Test Method	Value	
Length and Width	ISO 10545-2	± 0.6% max	
		± 0.5% max	
Thickness		± 5% max	
Straightness of Sides		± 0.5% max	
Rectangularity		± 0.6% max	
Surface Flatness		± 0.5% max	
Water Absorption		ASTM C 485	Warpage Diagonal/ edge ± 0.4%
Modulus of Rupture		ISO 10545-3	E ≤ 0.5% Bla GL
Breaking of Rupture		ISO10545-4	R ≥ 35 N/mm ²
Resistance to Surface Abrasion of Glazed Tiles		ISO 10545-4	S ≥ 1300 N
Resistance to Thermal Shock	ISO 10545-7	Class 4	
Crazing Resistance of Glazed Tiles	ISO 10545-9	Resistant	
Frost Resistance	ISO 10545-11	Frost Proof	
Resistance of Household Chemicals	ISO 10545-12	Class GA	
Resistance to Low Concentrations of Acids and Bases	ISO 10545-13	Class GLA	
Resistance to Stains of Glazed Tiles	ISO 10545-14	Class 5	
Scratch Hardness	EN 101	MOHS 7	
Anti-Slip Properties	DIN 51130	R10	
	ASTM C 1028	DRY: μ > 0.70 WET: μ > 0.60	
	B.C.R.A. REP. CEC. 6/81	0.40 ≤ μ ≤ 0.74	
	DIN 51097	Class C	
	DCOF Acu Test	μ > 0.42	
Recycled Content	-	20 %	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Glazed Porcelain Tile
- Natural Finish
- 10.5mm Thicknesses
- PEI Rating = 5
- V4 - **EXTREME** Variation
- Frost Resistance = Yes





www.genrose.com