

CLASSICO

 **GENROSE**





2" Hexagon Mosaic in Black



1" Hexagon Mosaic in Black



2" Hexagon Mosaic in White


AVAILABLE IN:

Mosaics

- 2"x2" Mosaic Matte Finish
- 2" Hexagon Mosaic Matte Finish
- 1" Hexagon Mosaic Matte Finish
- Octagon Mosaic w/ Black Dot Matte Finish
- Basketweave Mosaic w/ Black Dot Matte Finish
- Basketweave Mosaic w/ Grey Dot Matte Finish

- All sizes are NOMINAL
 - All available mosaics are shown below

COLORS:

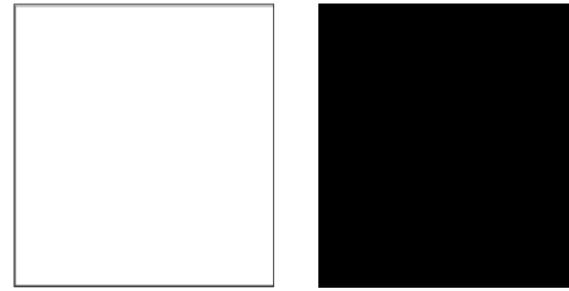


White

Black


MOSAICS:




Octagon Mosaic in White w/ Black Dot



Basketweave Mosaic in White w/ Black Dot



Basketweave Mosaic in White w/ Grey Dot




2x2 Mosaic in White



2" Hexagon Mosaic in Black



2" Hexagon Mosaic in White



1" Hexagon Mosaic in Black



1" Hexagon Mosaic in White



Features	Test Method	Value	
Length	-	±0.21%	
Thickness	-	-3.3~0%	
Straightness of Sides	-	-0.15~+0.27%	
Rectangularity	-	-0.21~+0.17%	
Surface Quality	-	A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.	
Water Absorption	-	0.5%	
Breaking Strength	-	955 N	
Modulus of Rupture	-	67 MPa	
Crazing Resistance	-	Resistant	
Frost Resistance	ISO 10545-12	Resistant	
Stain Resistance	ASTM C 1378	Class 5	
Surface Abrasion Resistance	ISO 10545-7	Class 3	
Coefficient of Linear Thermal Expansion	ISO 10545-8	5.6x10 ⁻⁶ K ⁻¹	
Chemical Resistance - Acids and Alkalis	ISO 10545-13	Low Concentration	High Concentration
		GLA	GA
Chemical Resistance - Household	ISO 10545-13	GA	
Lead and Cadmium Extracted	ASTM C 895-87	Lead	Cadmium
		<0.5mg/L	<0.02mg/dm ²
Static Coefficient of Friction	ASTM C 1028	Dry: 0.81-0.93 Wet: 0.51-0.53	
Slip Resistance (Ramp Test)	DIN 51130	Mean Overall Acceptance Angle: 4.1°	
DCOF(WET)	ANSI A 137.1-2012	0.26	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Glazed Porcelain Tile
- Matte Finish
- 5.5mm Thickness
- Pressed Edge
- PEI Rating = 3
- V1 - Uniform Variation
- Frost Resistance = Yes





www.genrose.com