CYPRUS












 $2.5" \times 10"$ Field Tile in White

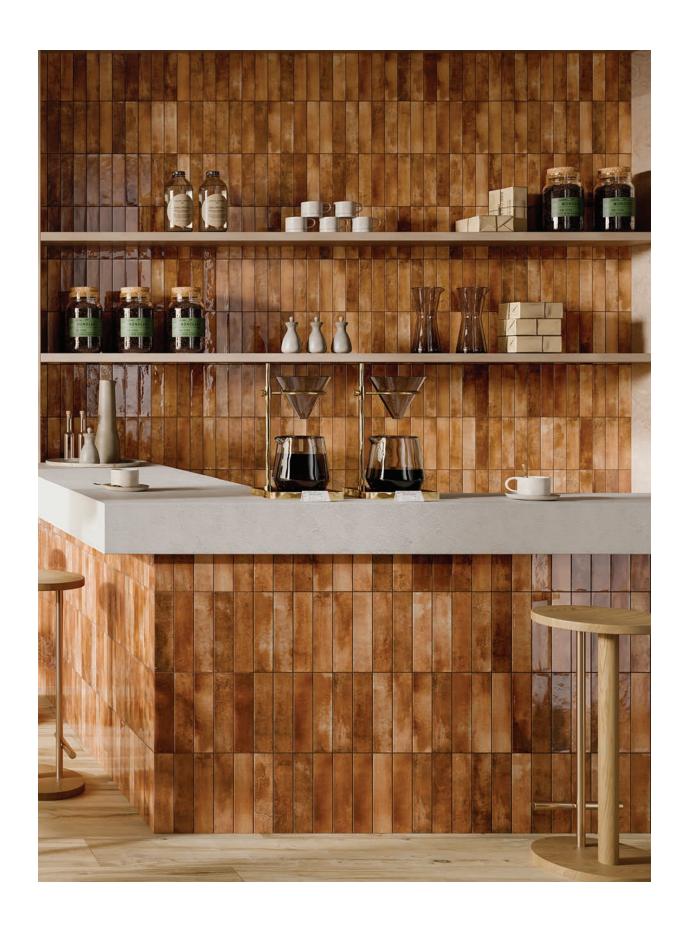

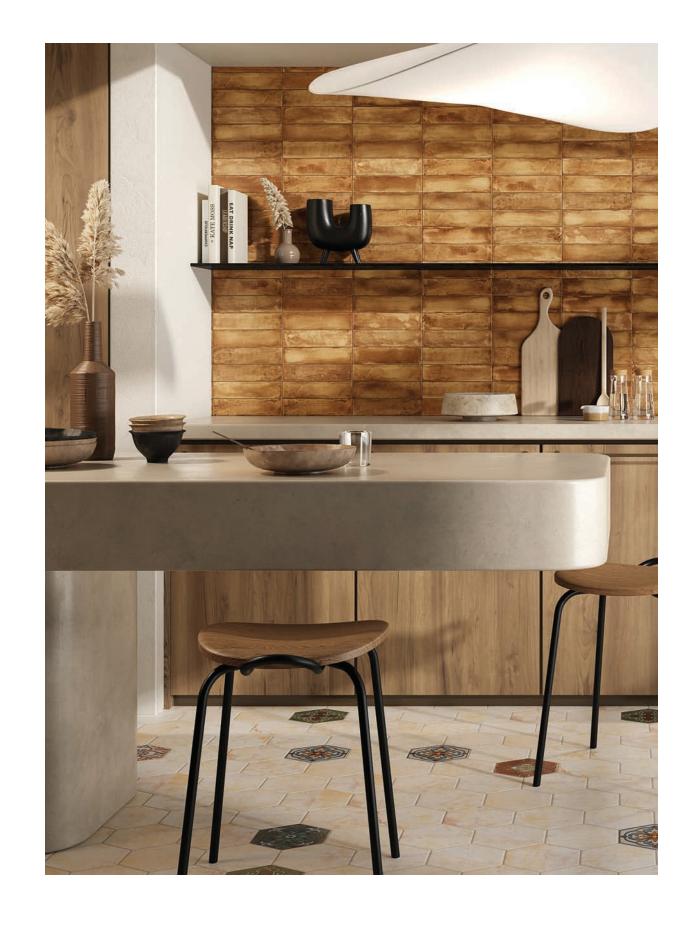

2.5" x 10" Field Tile in Cotto

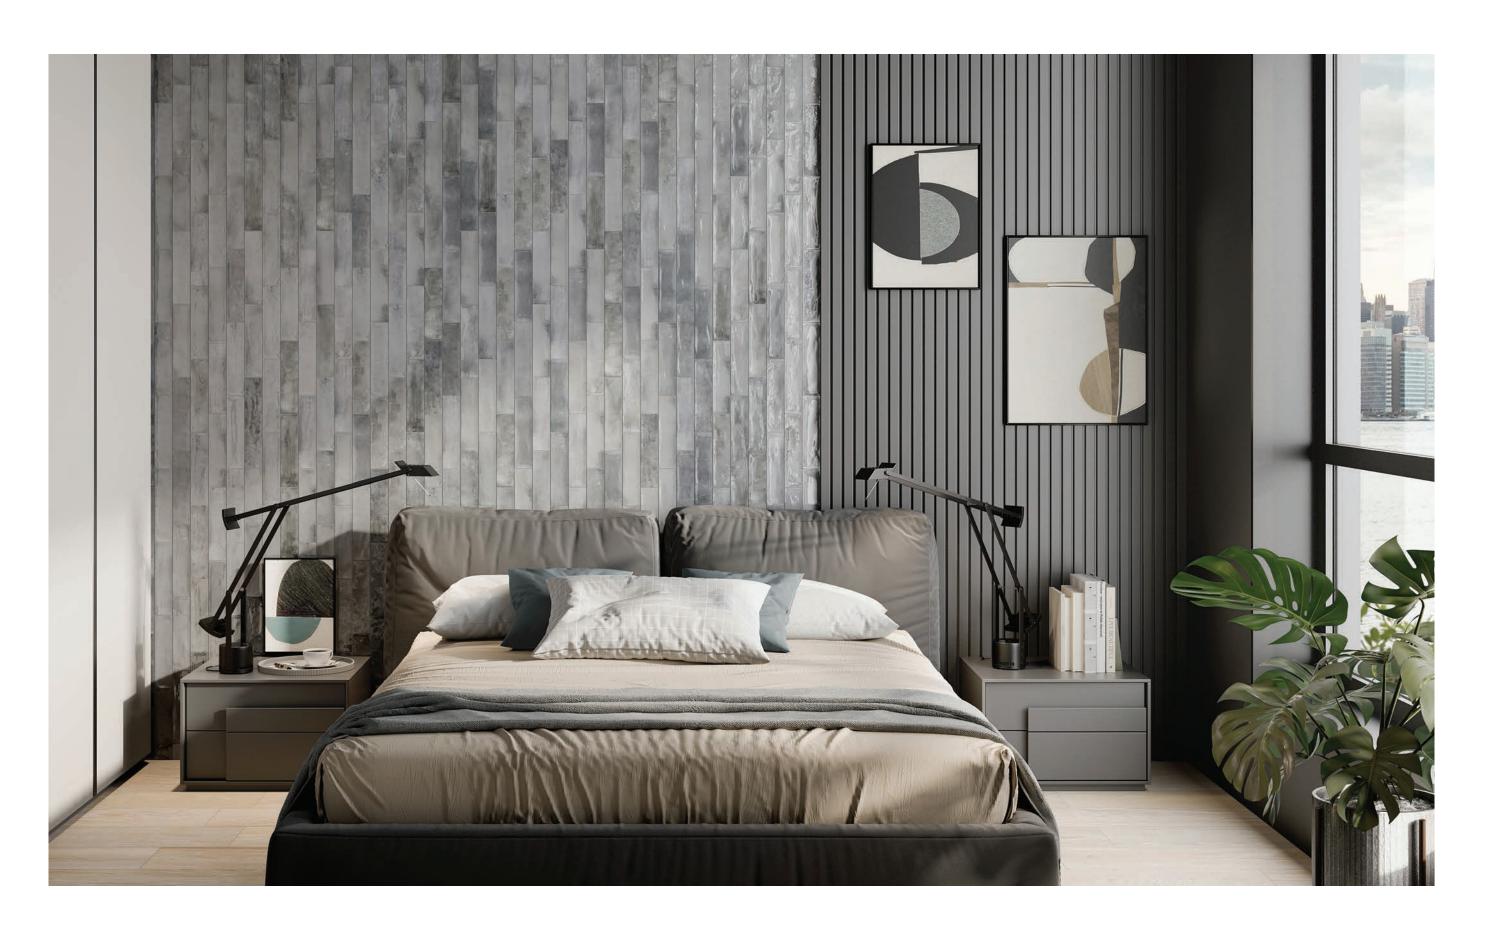

AVAILABLE STOCKED ITEMS:

9.5mm Field Tiles								
SIZE	FINISH		COLORS					
2.5" x 10"	Polished		White Light Grey Denim Blu Sea Water Green Ocra Cotto					
Trim Pieces								
SIZE	TYPE	FINISH	COLORS					
10"	Quarter Round	Polished	White Light Grey Denim Blu Sea Water Green Ocra Cotto					

All Sizes are Nominal.







White

Light Grey







Denim

Sea Water

0cra








Blu

Green

Cotto

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

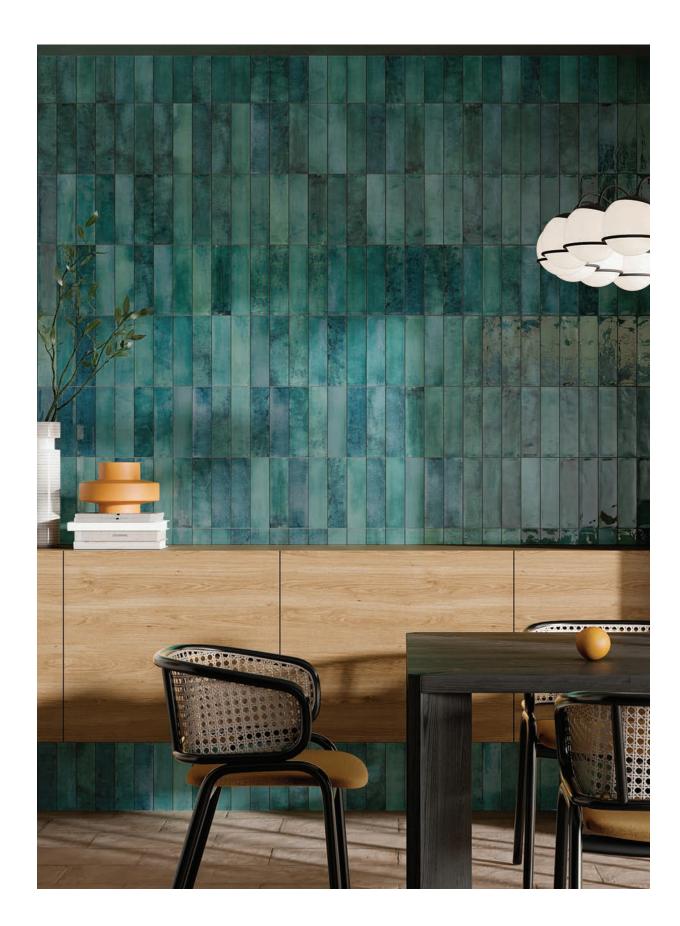



CYPRUS

Glazed Porcelain Tile

Features	Test Method	Value			
. Gataroo	Tool mound	N < 7cm	7cm ≤ N < 15cm N ≥ 15cm		15cm
Length and Width	ISO 10545-2	± 0.5mm	± 0.9mm	± 0.6mm	± 2mm
Thickness		± 0.5mm	± 0.5mm	± 0.5mm	± 0.5mm
Straightness of Sides		N/A	± 0.75mm	± 0.5mm	± 1.5mm
Squareness		N/A	± 0.75mm	± 0.5mm	± 2mm
Planarity		N/A	± 0.75mm	± 0.5mm	± 2mm
Water Absorption	ISO 10545-3	< 0.5%			
Bending Strength	ISO 10545-4	≥ 35 N / mm²			
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm³			
Abrasion Resistance	ISO 10545-7	5 = Light Grey White 4 = Blu Denim Green Ocra Sea Water 3 = Cotto			
Frost Resistance	ISO 10545-12	Resistant			
Resistance to Low/High Concentrations of Alkalis and Acids Resistance to Household Chemical Products	ISO 10545-13	Minimum Class B			
and Swimming Pool Additives					
Stain Resistance	ISO 10545-14	Class 3			
Hardness in Mohs Degrees	UNI EN 101	≥ 5° Mohs			
Dynamic Coefficient of Friction (DCOF)	ANSI A137.1:2012	> 0.42			
Recycled Content	-	52%			





This product will contribute to GBC Italia registered LEED projects. Low Emissions Material • Zero VOC

Disclaimer: DCOF wet and dry is different on every production lot and can vary.

This number represents the average DCOF of the tested production lots. If the

spec listed is over the minimum standard, it will meet the requirement.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Glazed Porcelain Tile
- Polished Finish
- 9.5mm Thickness
- Pressed Edge
- PEI Rating = 5 (Light Grey | White)
 - 4 (Blu | Denim | Green | Ocra | Sea Water)
 - 3 (Cotto)
- V3 Moderate Shading Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com