

DELANO

 **GENROSE**






32" x 32" Coccio Field Deco in Grigio



32"x32" Coccio Field Deco in Bianco

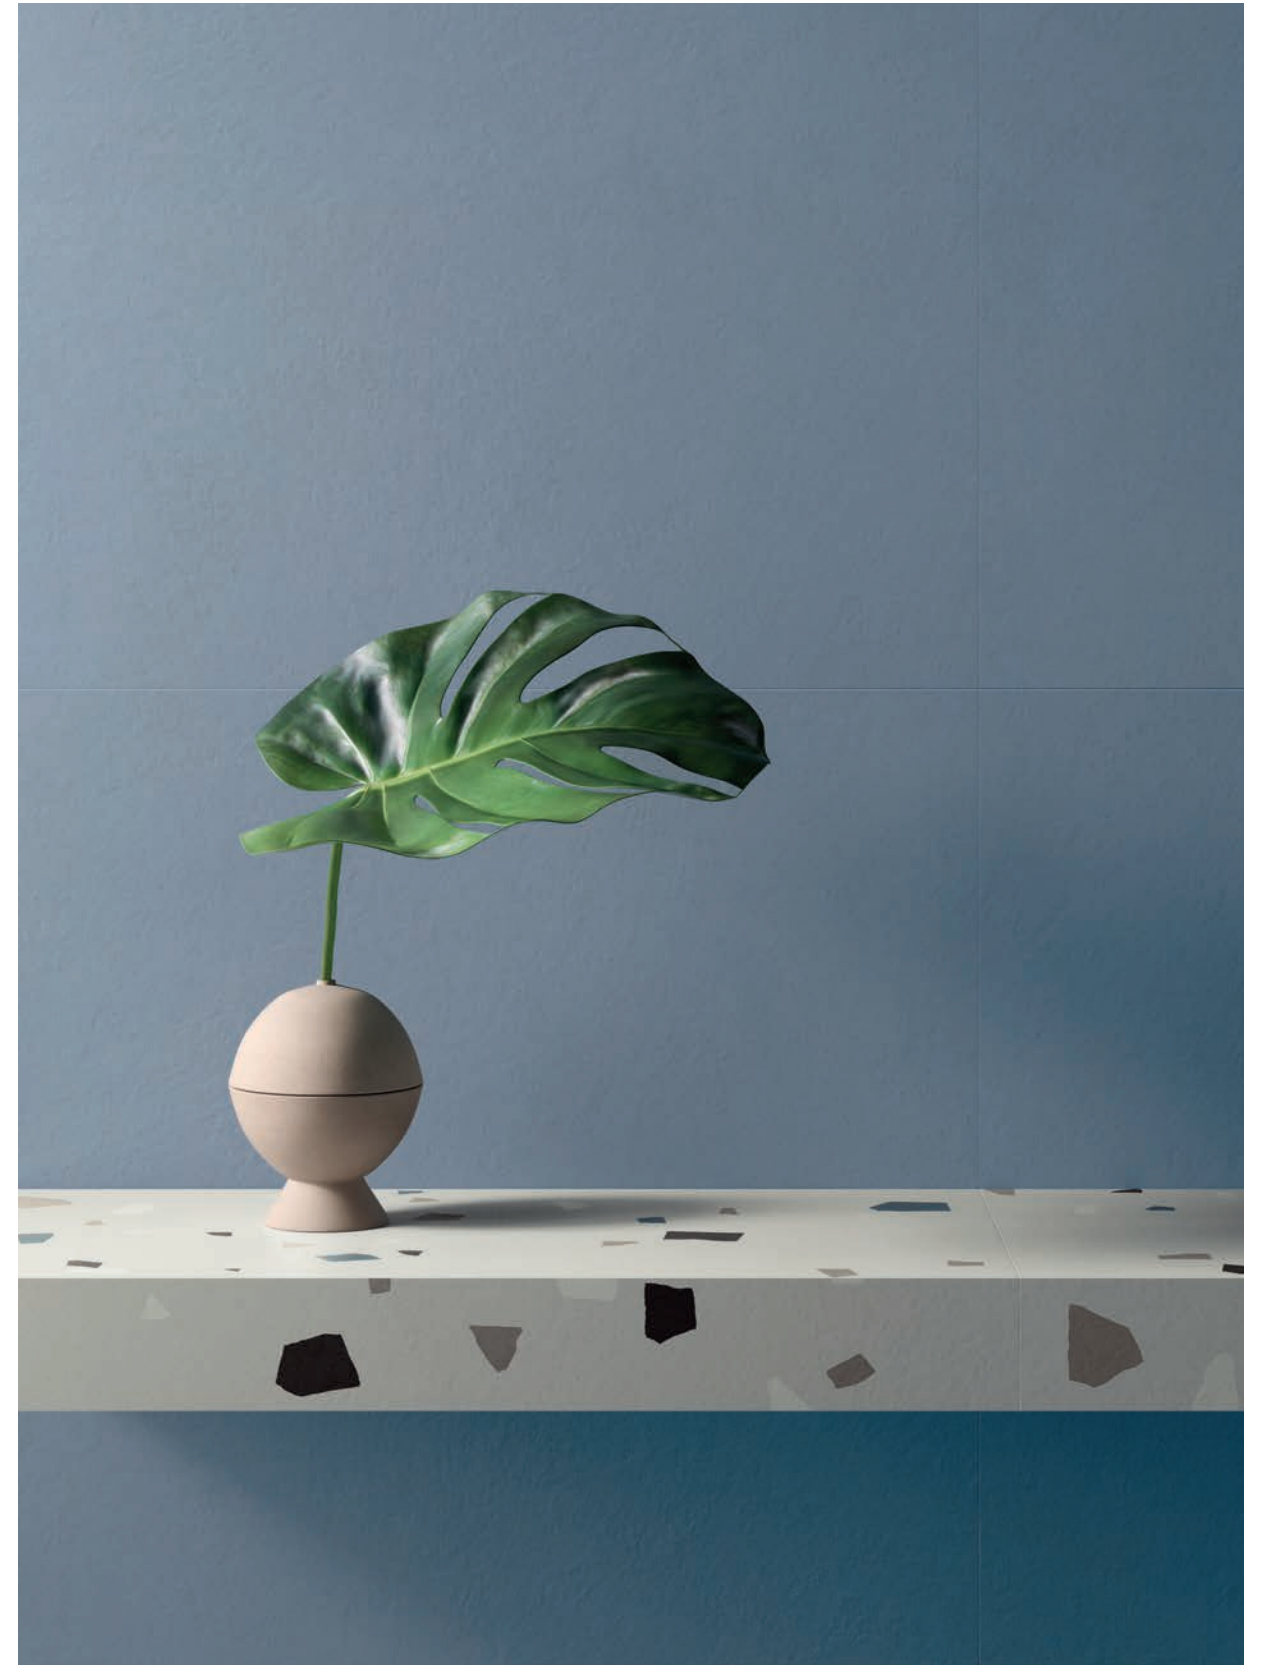

32"x32" Coccio Field Deco in Bianco

AVAILABLE STOCK ITEMS:

9mm Coccio Field Deco		
SIZE	FINISH	COLORS
32"x32"	Natural	Avorio Bianco Grigio

All Sizes are Nominal.



Avorio



Bianco



Grigio

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8"x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 3/8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2"x12"		1"x2" 2"x4" 5/8"x4"
	Diamond 4"	OCTAGONS		HEXAGONS	
	Hexagon 6"		2" w/ 0.6" Squares		1 1/8" 2"
	Chevron 2"x12" 6"x24"	SQUARES		RECTANGLES	
	TRAPEZOID W/ DOT 4"x2 1/2" w/ 5/8" Dot		1"x1" 2"x2" 1 3/8"x1 3/8" 3"x3"		1"x2" 1"x4"

*Other sizes available upon request

Features	Test Method	Value	
Length and width	ISO 10545 - 2	± 0.2 %	
Thickness		± 5 %	
Linearity		± 0.2 %	
Wedging		± 0.2 %	
Warpage		± 0.2 %	
Water Absorption	ISO 10545 - 3	< 0.1%	
Modulus of Rupture	ISO 10545 - 4	45 N/mm ²	
Breaking Strength		2500 N (9 mm)	
Scratch Resistance	ISO 10545 - 6	Average < 150 mm ³	
Thermal Expansion Coefficient	ISO 10545 - 8	6.8 MK ⁻¹	
Thermal Shock Resistance	ISO 10545 - 9	Resistant	
Frost Resistance	ISO 10545 - 12	Resistant	
Chemical Resistance	ISO 10545 - 13	Household	Acids and Alkali
		UA	Resistant
Stain Resistance	ISO 10545 - 14	Resistant	
DCOF (WET)	ANSI A326.3	0.75	
		This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700. Low Emissions Material • Zero VOC	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Through Body Porcelain Tile
- Natural Finish
- 9mm Thickness
- Rectified Edge
- PEI Rating = 4
- V2 - Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com