DOVER

GENROSE



For the most up-to-date product information, scan the QR code.

2″ x 10″ Wall Tile in Sky



2” x 10” Wall Tile in Azul Marino



2″ x 10″ Wall Tile in Blanco Hueso



6″ x 12″ Wall Tile in Verde Oscuro



2″ x 10″ Wall Tile in Bianco Hueso

AVAILABLE STOCKED ITEMS:

9.5mm Wall Tiles - *Pressed Edge*		
SIZE	**FINISH**	**COLORS**
2″ x 10″	Gloss	Arctic White | Sky | Storm | Blanco Hueso | Azul Marino | Verde Oscuro
6″ x 12″	Gloss	Arctic White | Sky | Storm | Blanco Hueso | Azul Marino | Verde Oscuro

8mm Brick Mosaic - *Rectified Edge*			
SHEET SIZE	**TYPE**	**FINISH**	**COLORS**
0.5″ x 12″	Finishing Strip	Gloss	Arctic White | Sky | Storm

All Sizes are Nominal.



2″ x 10″ Wall Tile in Sky

COLORS:

Arctic White




Sky




Storm

Blanco Hueso

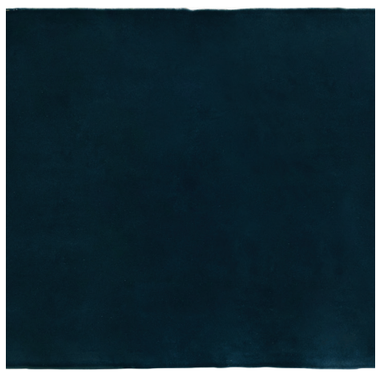

Azul Marino

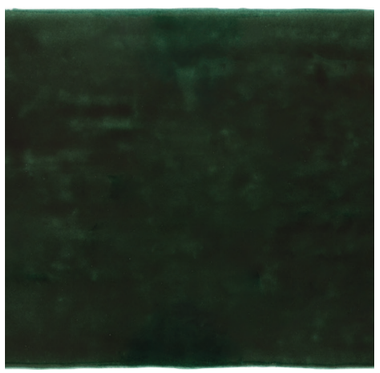

Verde Oscuro

Colors shown may vary from actual product. Final selection should be made from actual product samples.
Products and availability are subject to change, please refer to our website for the most up to date selection.



6″ x 12″ Wall Tile in Storm
6″ x 12″ Wall Tile in Verde Oscuro

GENROSE

DOVER
Ceramic Tile

Features	Test Method	Value
Length and Width	ISO 10545 - 2	Compliant
Thickness		Compliant
Straightness of Sides		Compliant
Rectangularity		Compliant
Surface Flatness		Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Water Absorption	ISO 10545 - 3	> 10%
Modulus of Rupture / Bending Strength	ISO 10545 - 4	≥ 18 N/mm^2
Breaking Strength		≥ 1040 N
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	6.3 x 10^{-6} $°C^{-1}$
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	A
Chemical Resistance (Low Concentration)		>LB
Chemical Resistance (High Concentration)		HB
Fire Resistance	-	$A1/A1_{FL}$
LEED	-	Yes
Recycled Content	-	43%
VOC Emissions	-	Zero VOC
Environmental Product Declaration	-	Industry Wide

This product will contribute to USGBC registered LEED projects.
It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8” wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16” wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Ceramic Tile
- Gloss Finish
- 9.5mm Thickness
- Pressed Edge
- V1 - Uniform Appearance
- Not Resistant

www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com