

EMPIRE



For the most up-to-date product information scan the QR code.





2" x 8" Flat Wall Tile in Quiet Moments
2" x 8" Stripes Wall Tile in Quiet Moments




2" x 8" Flat Wall Tile in Polar White
2" x 8" Stripes Wall Tile in Polar White



2" x 8" Flat Wall Tile in Polar White
2" x 8" Padded Wall Tile in Polar White



2" x 8" Flat Wall Tile in Polar White
2" x 8" Padded Wall Tile in Polar White

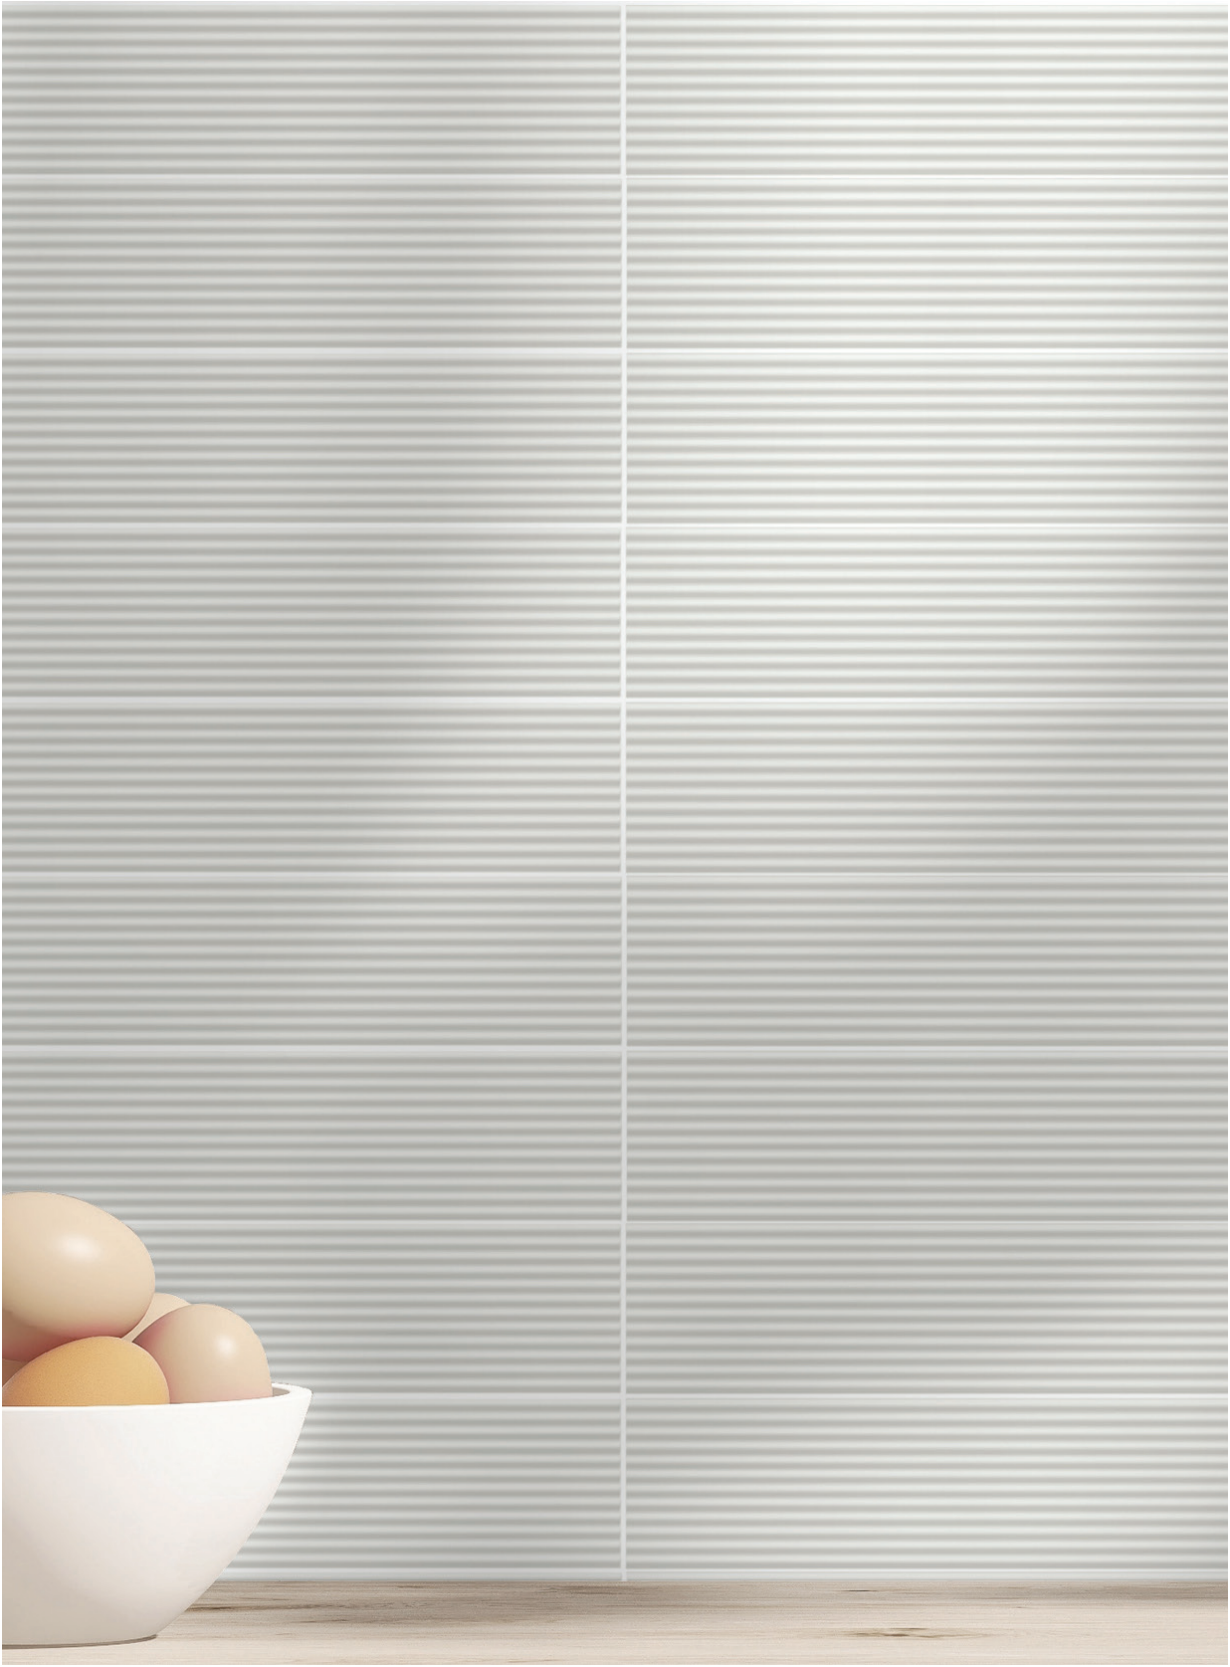


2" x 8" Stripes Wall Tile in Blank Canvas

AVAILABLE STOCKED ITEMS:

Wall Tiles				
SIZE	TYPE	THICKNESS	FINISH	COLORS
2" x 8"	Flat	7.5mm	Matte	Polar White Blank Canvas October Mist Quiet Moments
Wall Dimensionals				
SIZE	TYPE	THICKNESS	FINISH	COLORS
2" x 8"	Stripes	8mm	Matte	Polar White Blank Canvas October Mist Quiet Moments
2" x 8"	Padded	10.5mm	Matte	Polar White Blank Canvas October Mist Quiet Moments

- All Sizes are Nominal.

COLORS:

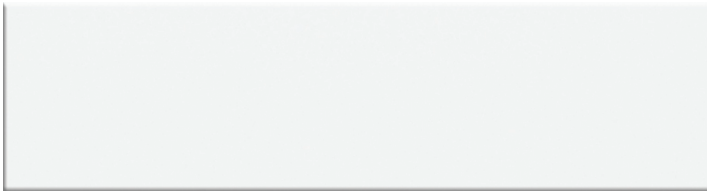

Polar White



Quiet Moments



Blank Canvas



October Mist



2" x 8" Stripes Wall Tile in Blank Canvas
2" x 8" Flat Wall Tile in Blank Canvas


2" x 8" WALL DIMENSIONAL TILE:




Polar White Stripes



Polar White Padded

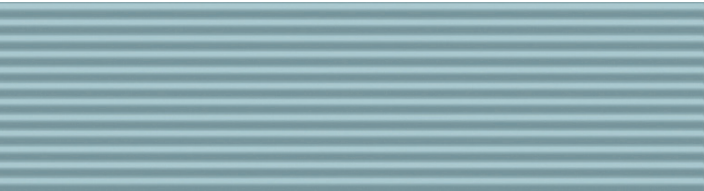


Quiet Moments Stripes

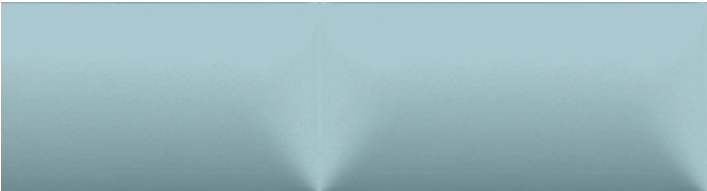

Quiet Moments Padded



Blank Canvas Stripes

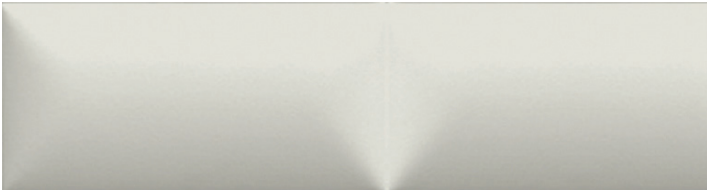

Blank Canvas Padded




October Mist Stripes





October Mist Padded

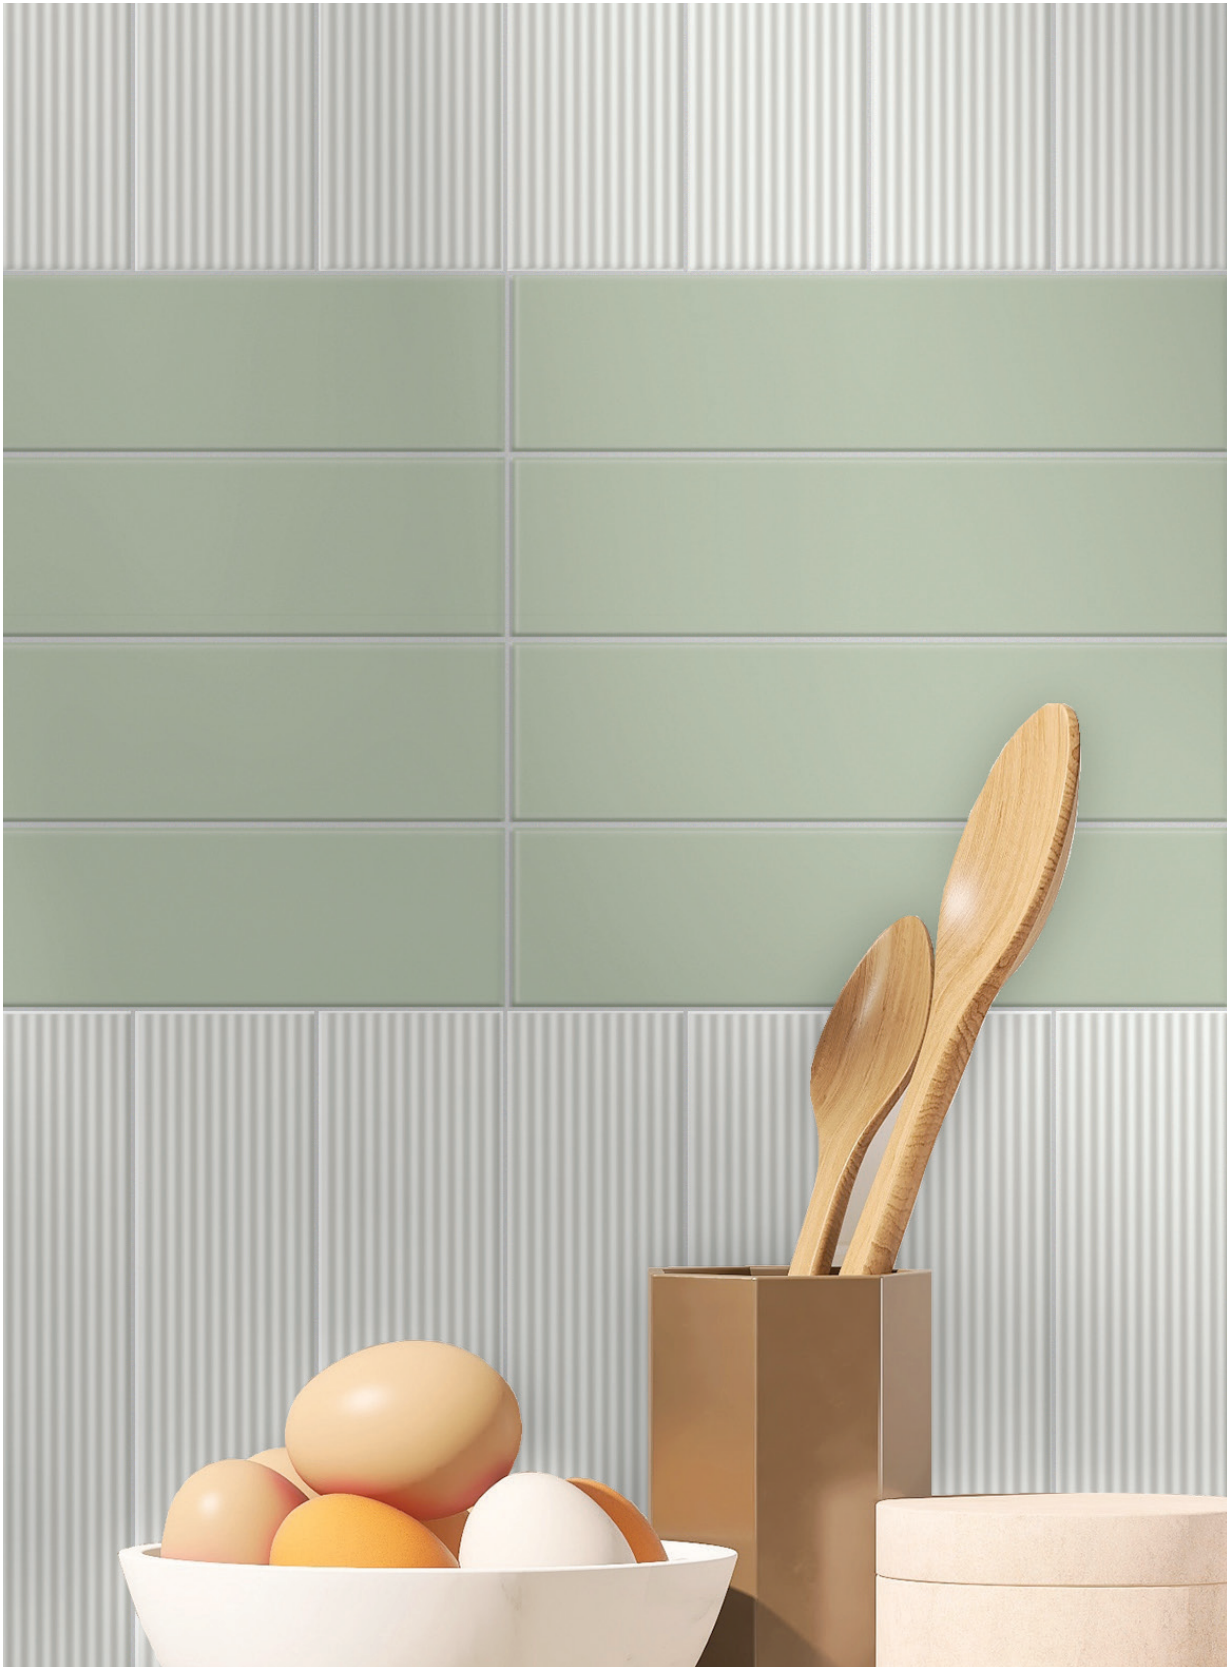Colors shown may vary from actual product. Final selection should be made from actual product samples.
Products and availability are subject to change, please refer to our website for the most up to date selection.



2" x 8" Stripes Wall Tile in Polar White
2" x 8" Flat Wall Tile in October Mist

Features	Test Method	Value
Length and Width	ISO 1054-2	±0.5% mm
Thickness		7.5mm 8mm 10.5mm
Straightness of Sides		±0.5mm
Surface Flatness		±0.3%
Surface Quality		≥95%
Water Absorption	ISO 10545-3	E>10%
Modulus of Rupture / Bending Strength	ISO 10545-4	>15N/MM²
Breaking Strength		>600N
Scratch Hardness	ISO 10545-7	4 Mohs
Thermal Shock Resistance	ISO 10545-11	Resistant
Crazing Resistance	ISO 10545-12	Resistant
Chemical Resistance	ASTM C1378	Domestic - A
		Low Concentration - LA
Stain Resistance	ANSI A137.1	5
Recycled Material	-	6% Preconsumer
<div><div> </div><div>This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700. Low Emissions Material • Zero VOC</div></div>		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

- Product Info:**
- Ceramic Tile
 - Matte Finish
 - 7.5mm | 8mm | 10.5mm Thicknesses
 - Pressed Edge
 - V1 - Uniform Appearance
 - Frost Resistance = No





www.genrose.com