EXPRESSIONS









20" x 48" Wall Tile in Mauve





AVAILABLE STOCKED ITEMS:

8.5mm Field Tiles - Rectified Edge				
SIZE	FINISH		COLORS	
20"× 48"	Matte		Pure Moon Dove Linen Mauve Pebble Cream Sun Salix Mint Jade Teal Iris Navy	
8.5mm Wall Dimensional - Rectified Edge				
SIZE	TYPE	FINISH	COLORS	
20" x 48"	3D Pleat	Matte	Linen Mauve Jade Iris	
Coordinating Border				
SIZE	TYPE	FINISH	COLORS	
3/8" x 48"	Metal	Matte	Bronzo Copper Gold Light Grey Mint Teal Petroleum	

SPECIAL ORDER ITEMS:


8.5mm Wall Deco - Rectified Edge			
SIZE	TYPE	FINISH	
20" × 48"	Shade	Matte	

All Sizes are Nominal.

MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

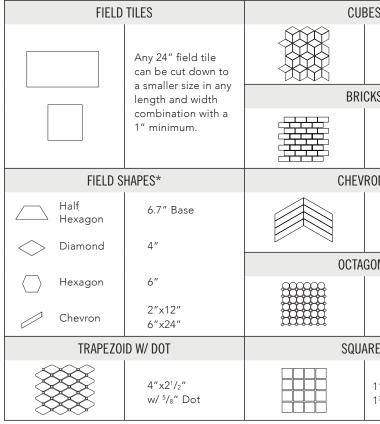

*Other sizes available upon request

COLORS

Dove | Mint | Iris

S	BASKETWEAVE		
2" 4"		1³/8″x3″ 2″x4″	
KS	DIAMONDS		
1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"	
ONS	HERRINGBONE		
2"x12"		1"x2" 2"x4" ⁵ / ₈ "x4"	
ONS	HEXAGONS		
2" w/ 0.6" Squares		1 ¹ / ₈ " 2"	
RES	RECTANGLES		
1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1″x2″ 1″x4″	

COLORS:



Cream



Iris



Linen



Mint















Mauve



Moon



Pebble

Colors shown may vary from actual product. Final selection should be made from actual product samples.





Pure



COORDINATING METAL BORDERS:





Salix



Teal

	Bronzo
	Copper
	Gold
	Light Grey
(and the second	Mint
	Teal
	Petroleum



WALL DIMENSIONAL:






Mauve



Iris



Jade

WALL DECO:



Iris

Mint





Features	Test Method	Value
Length and Width		± 0.4 % mm
Thickness		± 0.5 mm
Surface Quality	ISO 10545-2	Min. 95% of surface free of visible defec
Rectangularity		± 0.4% mm
Straightness of Sides		± 0.4 % mm
Water Absorption	ISO 10545-3	10% < Ev ≤20%
Breaking Strength	ISO 10545-4	> 600N
Modulus of Rupture	ISO 10545-4	≥ 15 N/mm ²
Coefficient of Linear Thermal Expansion	ISO 10545-8	≤7MK-1
Thermal Shock Resistance	ISO 10545-9	Resistant
Crazing Resistance	ISO 10545-11	Resistant
Frost Resistance	ISO 10545-12	Not Resistant
Chemical Resistance (Domestic)		А
Chemical Resistance (Low Concentration)	ISO 10545-13	LA
Chemical Resistance (High Concentration)		НА
Stain Resistance	ISO 10545-14	Class 5
Slip Resistance	ANSI A326.3	DCOF Does Not Pass
Recycled Material	-	20% (Does not apply to deco)
VOC Emissions	-	Zero VOC
Declare	-	Red List Free
Health Product Declaration	-	Available

Declare. NO According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

•	Ceramic Tile	•	Rectified Edge
•	Matte Finish	•	V2 - Slight Shading Variat
•	8.5mm Thickness	•	Frost Resistance = No

Colors shown may vary from actual product. Final selection should be made from actual product samples.



Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

EXPRESSIONS

Ceramic Tile

This product will contribute to USGBC registered LEED projects.

It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.



www.genrose.com



www.genrose.com