
## FORGE









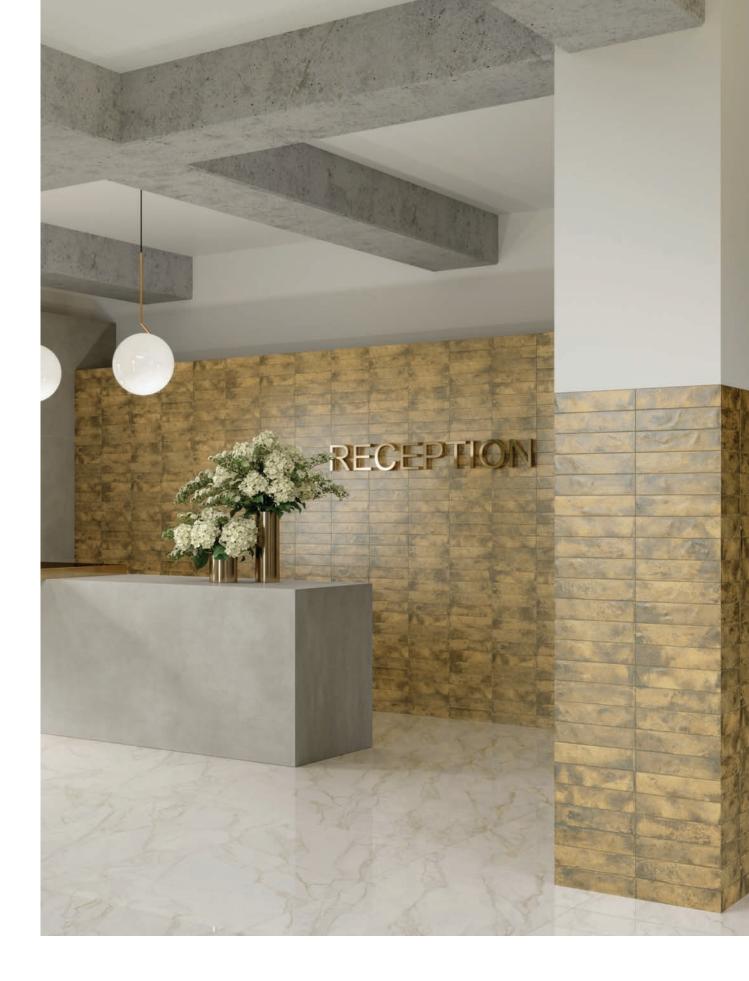

2.5"x 9.5" Floor/Wall Tile in Oro Brunito

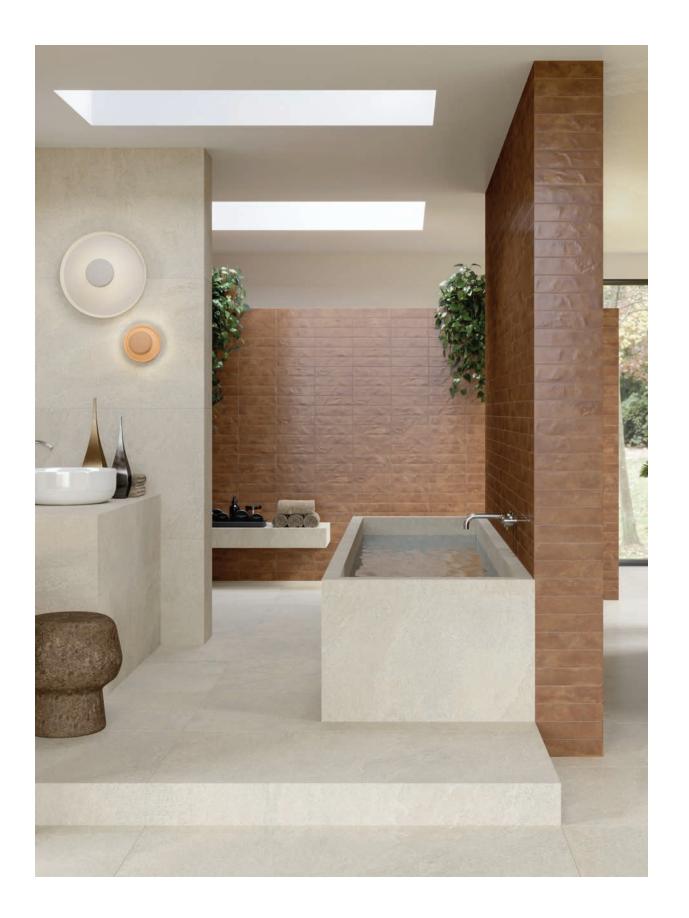

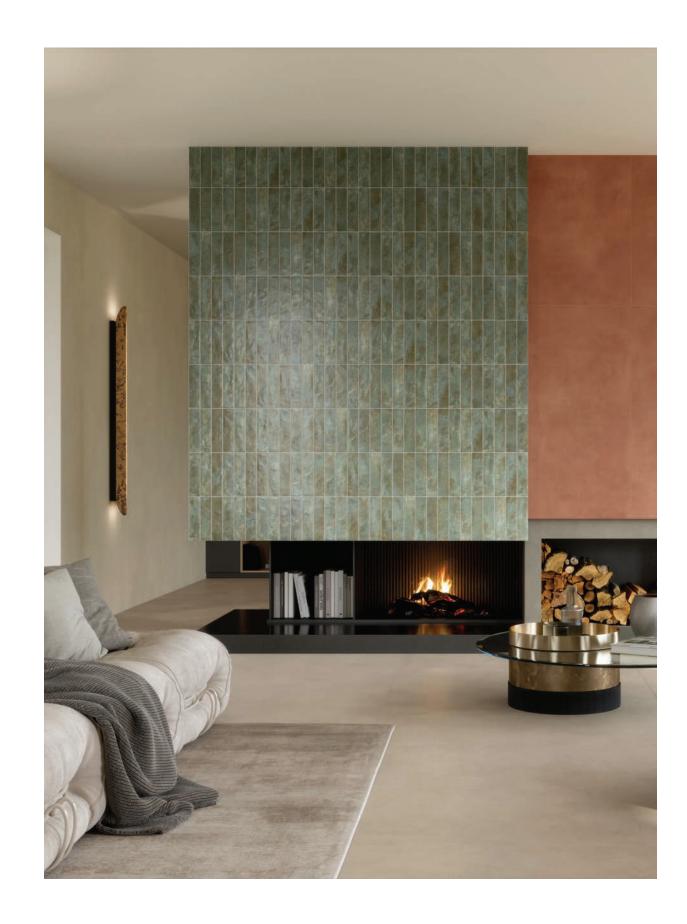

2.5"x 9.5" Floor/Wall Tile in Verde Rame

## **AVAILABLE STOCKED ITEMS:**

| 8.5mm | Floor/Wal | l Tiles* |
|-------|-----------|----------|
|-------|-----------|----------|

| SIZE       | FINISH | COLORS  |
|------------|--------|---|
| 2.5"x 9.5" | Matte  | Bianco Argenteo   Oro Brunito   Verde Rame   Corten Bruciato   Blu Iron |

All Sizes are Nominal. \* Floor Use: Residential Only.





**Bianco Argenteo** 

**Oro Brunito** 



Verde Rame



**Corten Bruciato** 

**Blu Iron** 



| Features   | Test Method  | Value                          |
|--|--|--------------------------------|
| Length and Width   | ISO 10545 - 2  | ± 0.6%                         |
| Straightness of Sides  |  | ± 0.5%                         |
| Rectangularity   |  | ± 0.5%                         |
| Flatness   |  | ± 0.5%                         |
| Thickness  |  | ± 5.0%                         |
| Water Absorption   | ISO 10545 - 3  | Ev ≤ 0.5%                      |
| Breaking Strength  | ISO 10545 - 4  | S ≥ 1800 N<br>R ≥ 40 N/mm²     |
| Linear Heat Expansion Coefficient                            | ISO 10545 - 8  | ≤ 7 (MK) <sup>-1</sup>         |
| Thermal Shock Resistance                                     | ISO 10545 - 9  | Resistant                      |
| Frost Resistance   | ISO 10545 - 12   |                                |
| Resistance to Household Chemicals<br>and Swimming Pool Salts |  | А                              |
| Resistance to Low Concentrations<br>of Acids and Alkalis     | ISO 10545 - 13   | LA                             |
| Resistance to High Concentrations<br>of Acids and Alkalis    |  | НА                             |
| Resistance to Stains   | ISO 10545 - 14   | 5                              |
| Dynamic Coefficient of Friction (DCOF)                       | ANSI A326.3:2022   | 0.49 Wet                       |
|  | his product will contribute to USGBC regi<br>ntribute to the ANSI approved NAHB Gre<br>Low Emissions Material • Zero | een Building Standard ICC 700. |

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

## Product Info:

- Glazed Porcelain Tile
- Matte Finish
- 8.5mm Thickness
- Pressed Edge •
- PEI Rating = 3
- V3 Moderate Variation
- Frost Resistance = Yes
- Floor Application = Residential Use Only





www.genrose.com



www.genrose.com