

FUSION



For the most up-to-date product information, scan the QR code.

3/4" Penny Round Floor/Wall Mosaic in Glare



3/4" Penny Round Floor/Wall Mosaic in Velvet



2" Hexagon Floor/Wall Mosaic in Black



3/4" Penny Round Floor/Wall Mosaic in White



2" Hexagon Floor/Wall Mosaic in Sky



2" Hexagon Floor/Wall Mosaic in Ginger





AVAILABLE STOCKED ITEMS:

5.6mm Floor/Wall Mosaic - Pressed Edge			
SIZE	TYPE	FINISH	COLORS
2"	Hexagon	Natural	Glare Candle Wing Ink Plume Chimney Moon Ginger Platinum Sky Lilac White Vanilla Almond Velvet Sage Pine Indigo Black
5.5mm Floor/Wall Mosaic - Pressed Edge			
SIZE	TYPE	FINISH	COLORS
3/4"	Penny Round	Natural	Glare Candle Wing Ink Plume Chimney Moon Ginger Platinum Sky Lilac White Vanilla Almond Velvet Sage Pine Indigo Black




2" Hexagon Floor/Wall Mosaic in Ink


HEXAGON MOSAICS (2"):

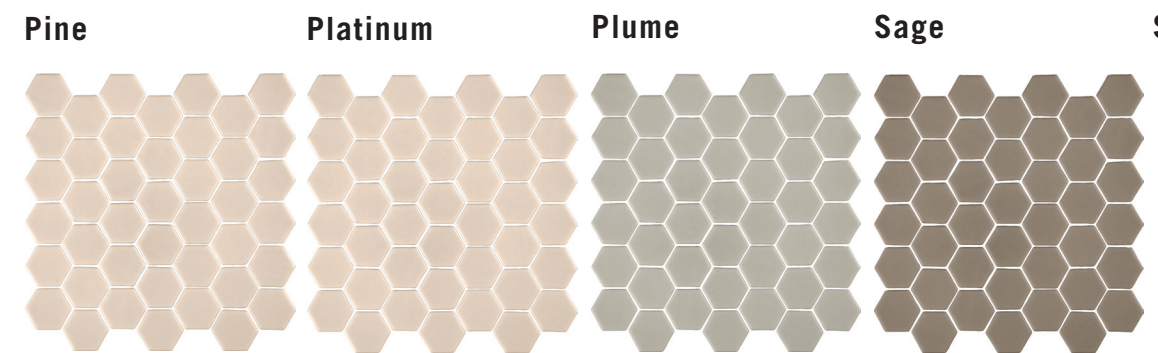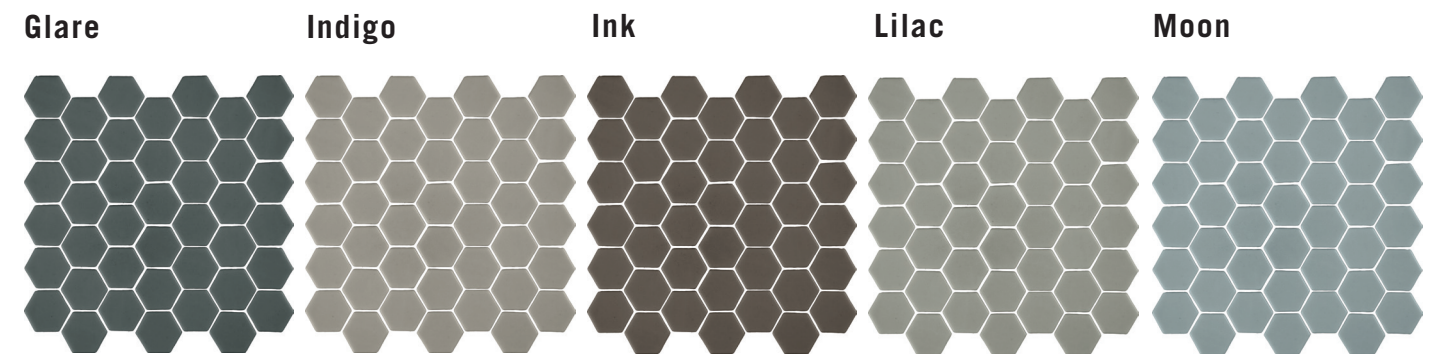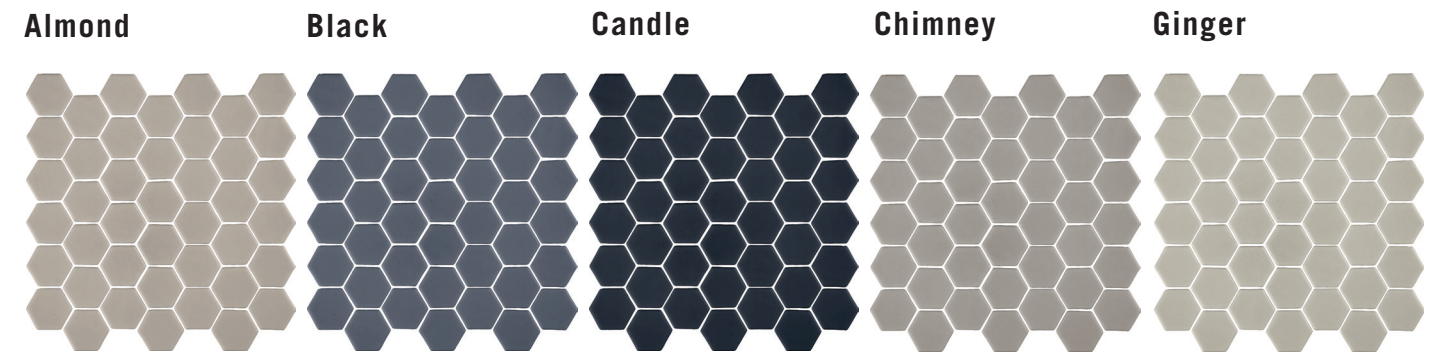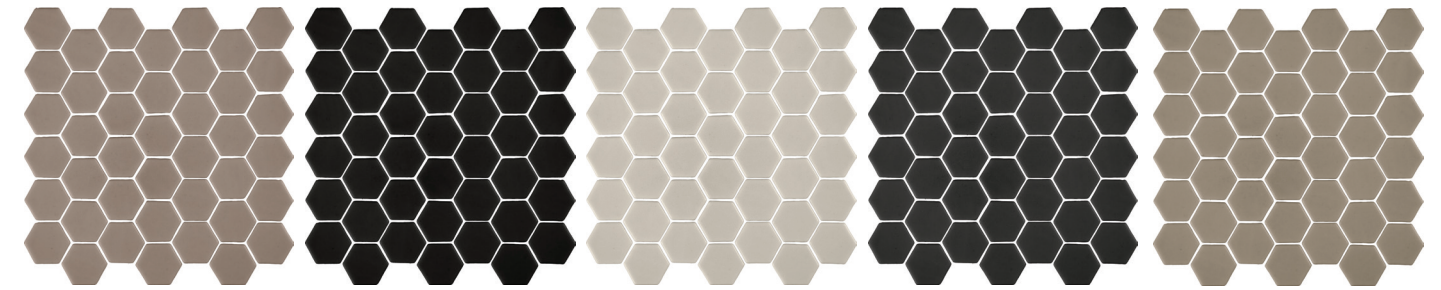


PENNY ROUND MOSAICS (3/4"):

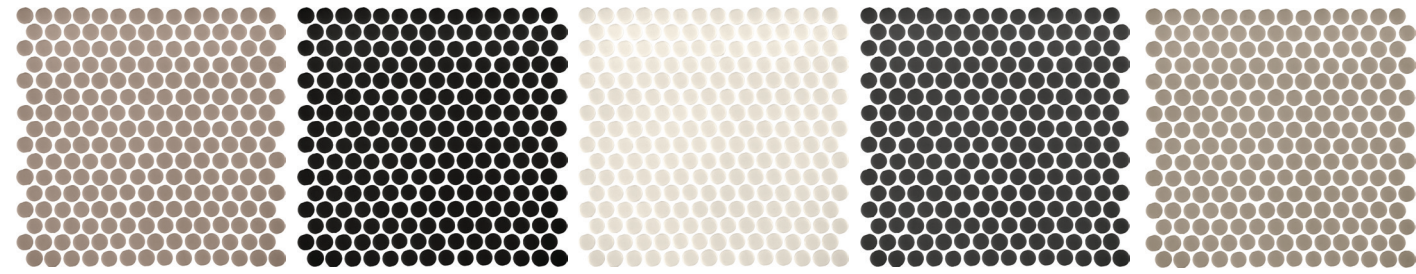


Almond Black Candle Chimney Ginger

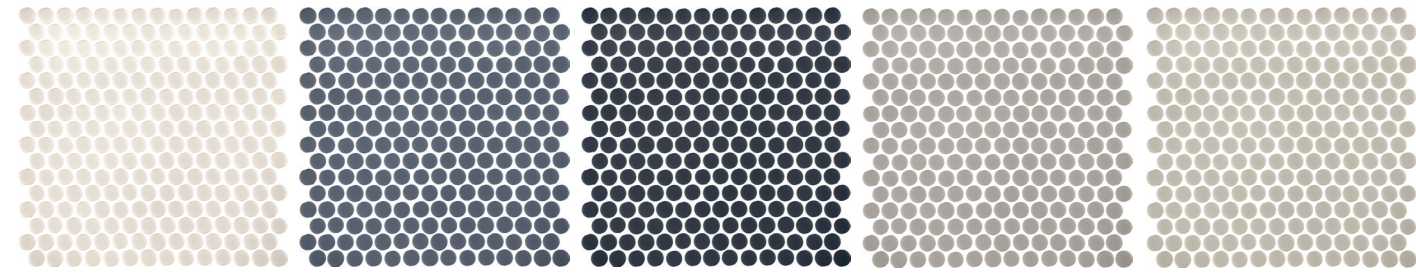

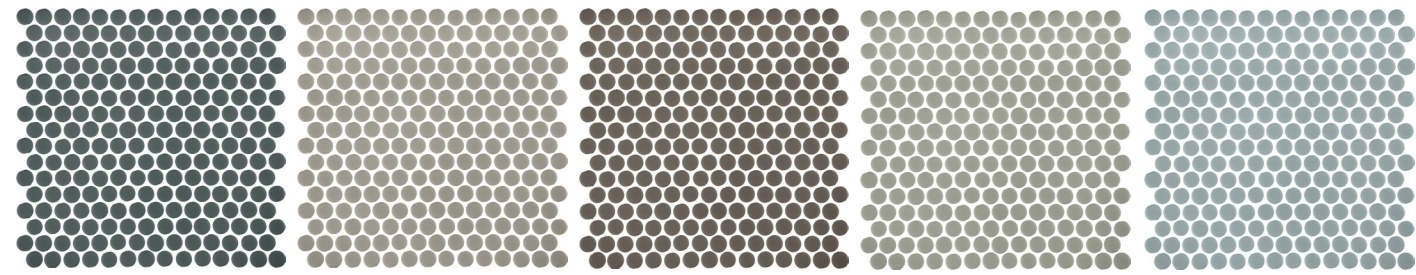

Glare Indigo Ink Lilac Moon

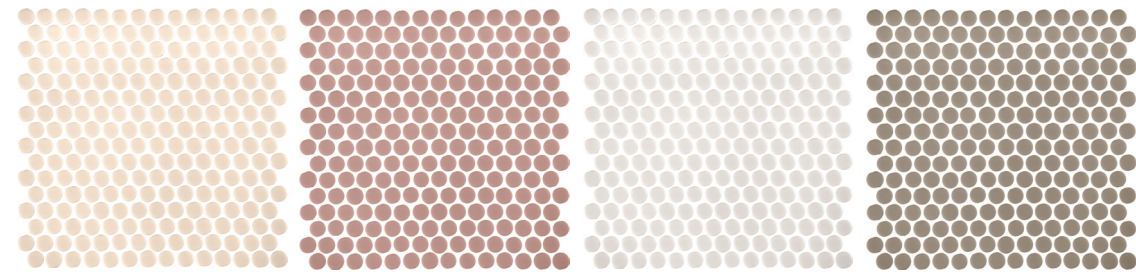

Pine Platinum Plume Sage Sky



Vanilla Velvet White Wing

Features	Test Method	Value
Length and Width	ISO 10545 - 2	±.5%
Thickness		±5%
Straightness of Sides		±5%
Rectangularity		±5%
Surface Flatness		±5%
Surface Quality		Min. 95% of tiles free of visible defects
Water Absorption	ISO 10545 - 3	<.01%
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	GA
Chemical Resistance (Low Concentration)		GLA
Chemical Resistance (High Concentration)		GHA
Fire Resistance	-	A1/A1 _{FL}
Recycled Content	-	100%
Slip Resistance	ANSI A326.3	DCOF 0.51
LEED	-	Yes
VOC Emissions	-	Zero VOC
 		This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glass Tile
- Natural Finish
- 5.5mm | 5.6mm Thicknesses
- Pressed Edge

- V1 - Uniform Appearance (White | Vanilla | Almond | Velvet | Sage | Pine | Indigo | Black)
- V2 - Slight Variation (Glare | Candle | Wing | Ink | Plume | Chimney | Moon | Ginger | Platinum | Sky | Lilac)
- Frost Resistant





www.genrose.com