

GEOLUX

 GENROSE






5.8"x5.8" Jazz Deco in Flapper Shadow  
7.3"x7.3" Field Tile in Flapper Shadow



5.8"x5.8" Royal | Glam | Elegance | Jazz Deco in Flapper Shadow



5.8"x5.8" Wall Tile in Silver | Betty Rose  
5.8"x5.8" Jazz Deco in Silver  
7.3"x7.3" Field Tile in Betty Rose

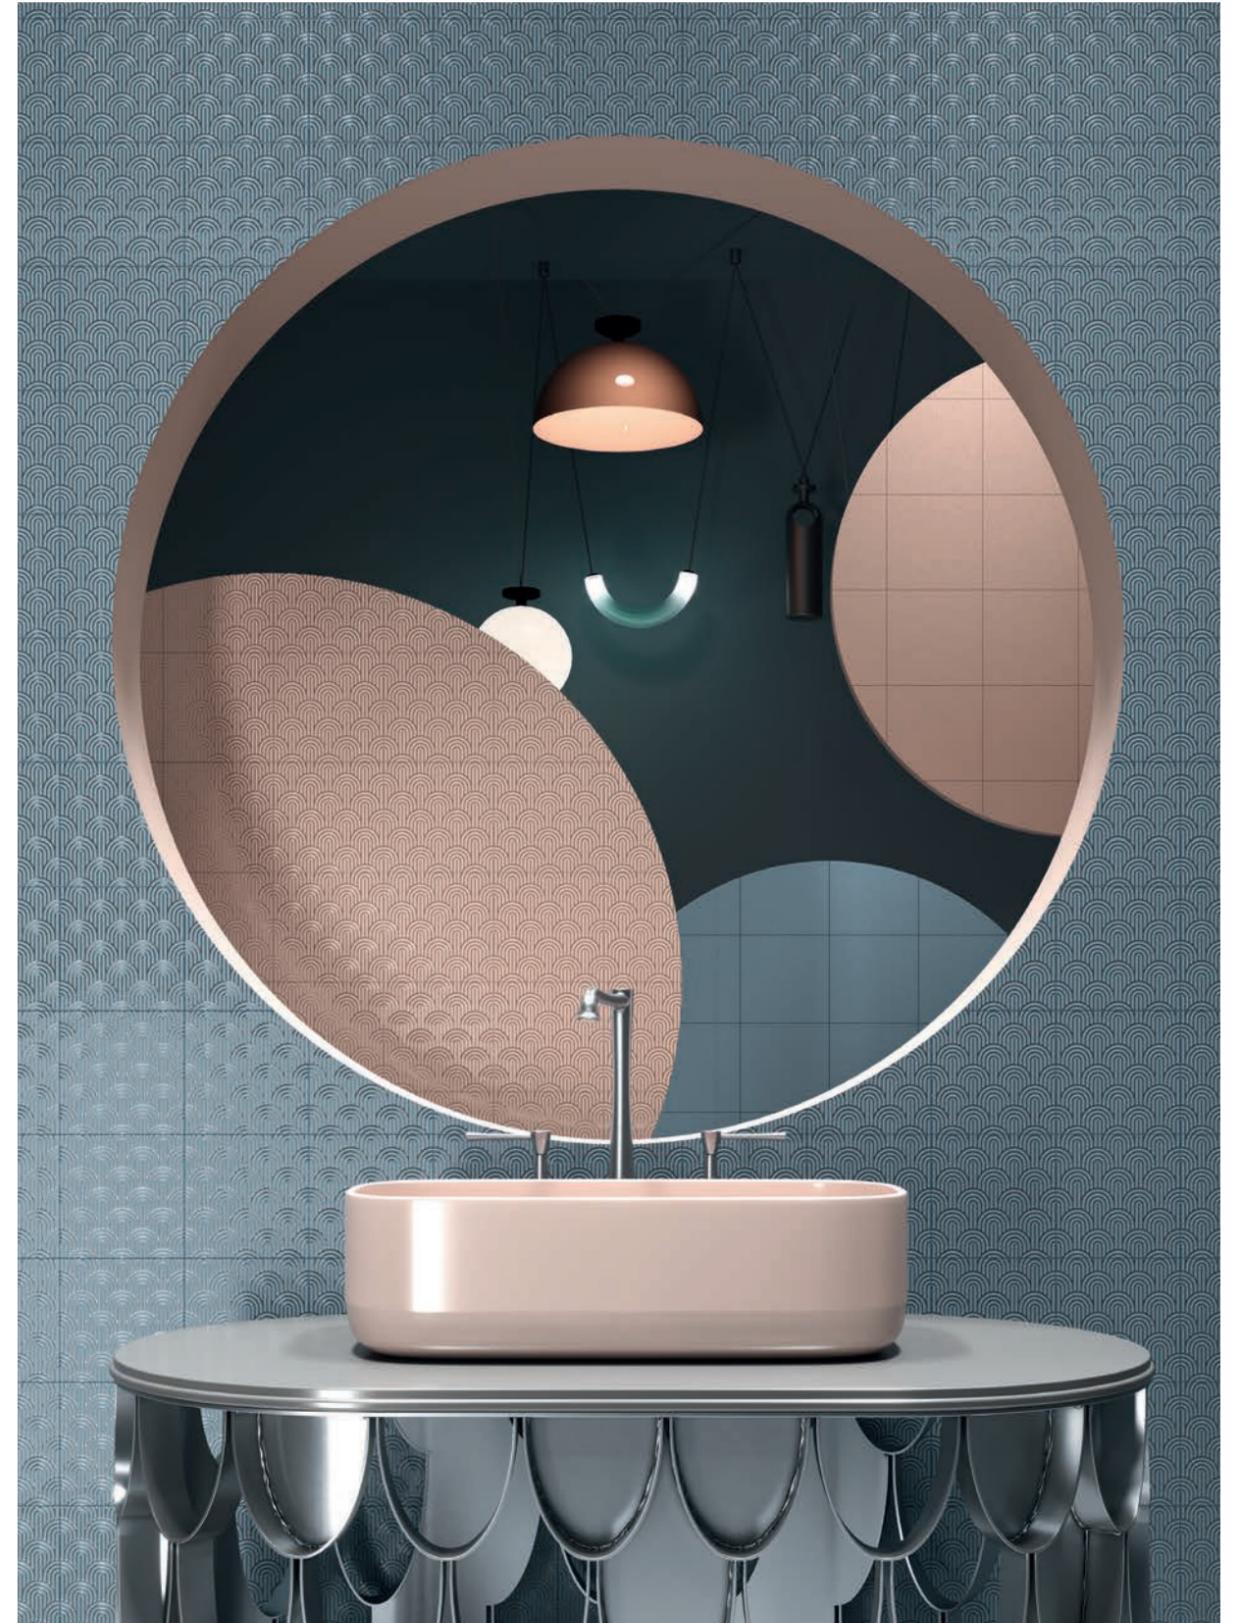

5.8"x5.8" Wall Tile in French Navy | Betty Rose  
5.8"x5.8" Elegance Deco in French Navy | Betty Rose




5.8"x5.8" Wall Tile in White Swing  
5.8"x5.8" Glam Deco in Flapper Shadow  
5.8"x5.8" Elegance Deco in Gold



5.8"x5.8" Wall Tile in White Swing  
5.8"x5.8" Royal Deco in Flapper Shadow | White Swing



5.8"x5.8" Glam Deco in Gold

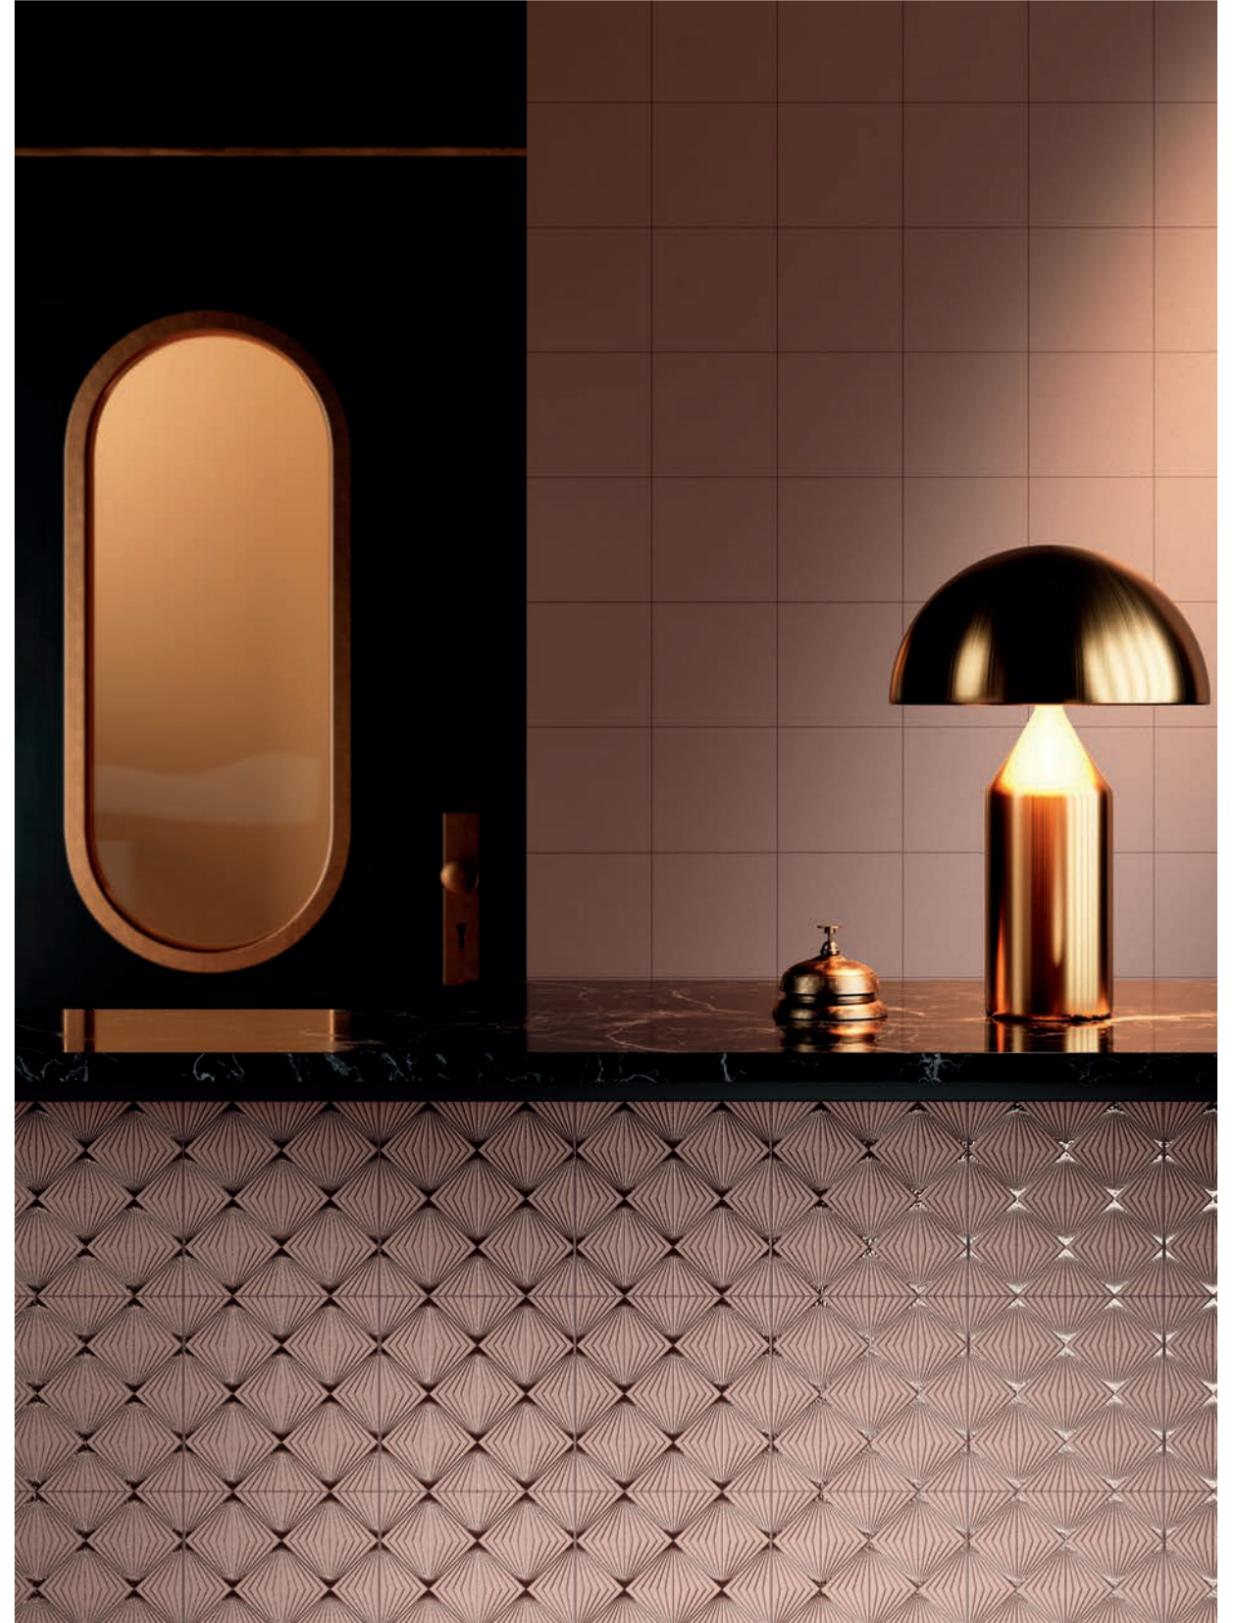

5.8"x5.8" Wall Tile in Betty Rose  
5.8"x5.8" Royal Deco in Betty Rose

## AVAILABLE IN:

**9mm Field Tile** Not Available in Gold | Silver

7.3"x7.3" *Pearly Sheen Finish*

### 8mm Wall Tile + Decos

5.8"x5.8" Wall Tile *Pearly Sheen Finish*

5.8"x5.8" Royal Deco *Glossy/Matte Finish*

5.8"x5.8" Jazz Deco *Glossy/Matte Finish*

5.8"x5.8" Glam Deco *Glossy/Matte Finish*

5.8"x5.8" Elegance Deco *Glossy/Matte Finish*

- All sizes are nominal




**White Swing**



**Betty Rose**



**Silver**

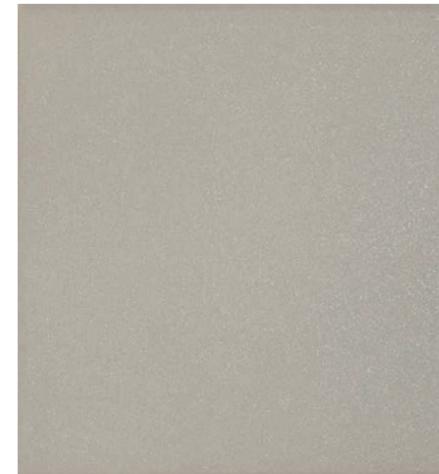


**Grey Velvet**



**French Navy**



**Gold**

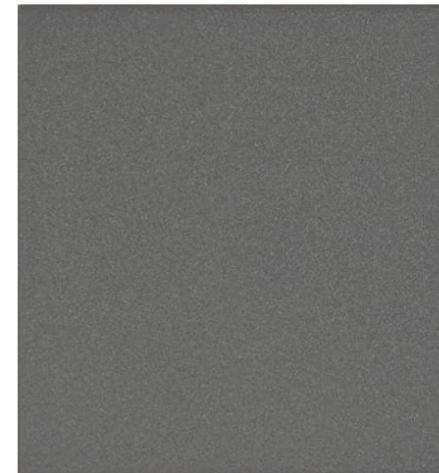


**Flapper Shadow**

Colors shown may vary from actual product. Final selection should be made from actual product samples.


5.8"x5.8" Wall Tile in Betty Rose  
5.8"x5.8" Elegance Deco in Grey Velvet | Betty Rose

## ROYAL DECO

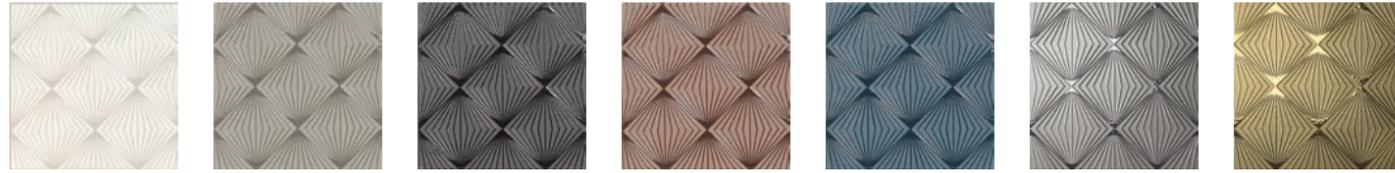

White Swing Grey Velvet Flapper Shadow Betty Rose French Navy Silver Gold

## JAZZ DECO

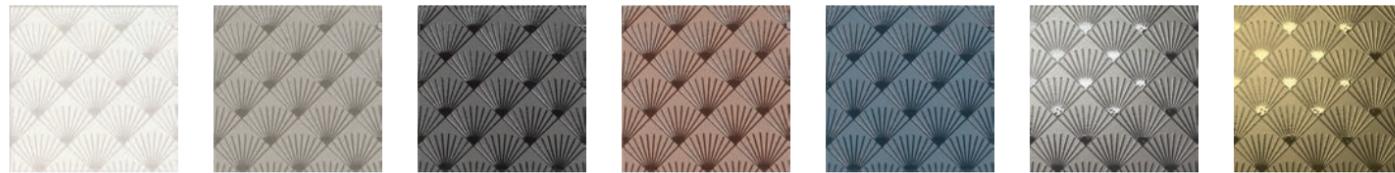

White Swing Grey Velvet Flapper Shadow Betty Rose French Navy Silver Gold

## ELEGANCE DECO



White Swing Grey Velvet Flapper Shadow Betty Rose French Navy Silver Gold

## GLAM DECO



White Swing Grey Velvet Flapper Shadow Betty Rose French Navy Silver Gold



5.8"x5.8" Wall Tile in White Swing  
5.8"x5.8" Elegance Deco in French Navy  
7.3"x7.3" Field Tile in French Navy

Features	Test Method	Value		
Length and Width	ISO 10545-2	± 0.2 %		
Thickness		9 ± 3.0 %		
Straightness of Sides		± 0.2 %		
Rectangularity		± 0.2 %		
Surface Flatness		± 0.2 %		
Water Absorption	ISO 10545-3	≤ 0.1 %		
Breaking Strength	ISO 10545-4	>2000 N		
Modulus of Rupture		>40 N/mm <sup>2</sup>		
Resistance to Surface Abrasion		5 - White 4 - Betty Rose   French Navy   Flapper Shadow   Grey Velvet		
Coefficient of Linear Thermal Expansion ( 1/K )	ISO 10545-8	<9 x 10 <sup>-6</sup>		
Thermal Shock Resistance	ISO 10545-9	Resistant		
Moisture Expansion	ISO 10545-10	< 0.1mm/m		
Crazing Resistance	ISO 10545-11	Resistant		
Frost Resistance	ISO 10545-12	Resistant		
Chemical Resistance	ISO 10545-13	Household/ Swimming Pool Salts	Low Concentration	High Concentration
		GA	GLA	GHA
Resistance to Stains	ISO 10545-14	5		
Critical Angle of Slip (Inclined Platform - Footwear)	DIN 51130	R9		
Dinamic Coefficient of Friction.	DCoF ANSI 137-1	>0.42		
Contained Lead and Cadmio		0 %		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide .

Manufacturers' suggested grout joint recommendation for Geolux is minimum 2mm.

Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Glazed Porcelain Tile
- Pearly Sheen Finish
- 9mm Thickness
- Rectified Edge
- PEI Rating = 5 - White  
4 - Betty Rose | French Navy | Flapper Shadow | Grey Velvet
- V1 - Uniform Appearance
- Frost Resistance = Yes

Features	Test Method	Value		
Length and Width	ISO 10545-2	± 0.2 %		
Thickness		9 ± 3.0 %		
Straightness of Sides		± 0.2 %		
Rectangularity		± 0.2 %		
Centre Curvature		± 0.2 % / - 0.1 %		
Edge Curvature		± 0.2 % / - 0.1 %		
Warpage		± 0.2 %		
Water Absorption	ISO 10545-3	14 %		
Breaking Strength	ISO 10545-4	1200 N		
Modulus of Rupture		25 N/mm <sup>2</sup>		
Coefficient of Linear Thermal Expansion ( 1/K )	ISO 10545-8	7.3 x 10 <sup>-6</sup>		
Thermal Shock Resistance	ISO 10545-9	Resistant		
Crazing Resistance	ISO 10545-11	Resistant		
Chemical Resistance	ISO 10545-13	Household/ Swimming Pool Salts	Low Concentration	High Concentration
		GA	GLA	GHA
Resistance to Stains	ISO 10545-14	5		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide .

Manufacturers' suggested grout joint recommendation for Geolux is minimum 2mm.

Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Ceramic Tile
- Glossy/Matte | Pearly Sheen Finishes
- 8mm Thickness
- Rectified Edge
- V1 - Uniform Appearance
- Frost Resistance = No





[www.genrose.com](http://www.genrose.com)