# GRACE











12″x24″ Field Tile in Dark Grey 3″x6″ Brick Mosaic in White 24"x48" Field Tile in Ivory 24"x24" Field Tile in Light Grey

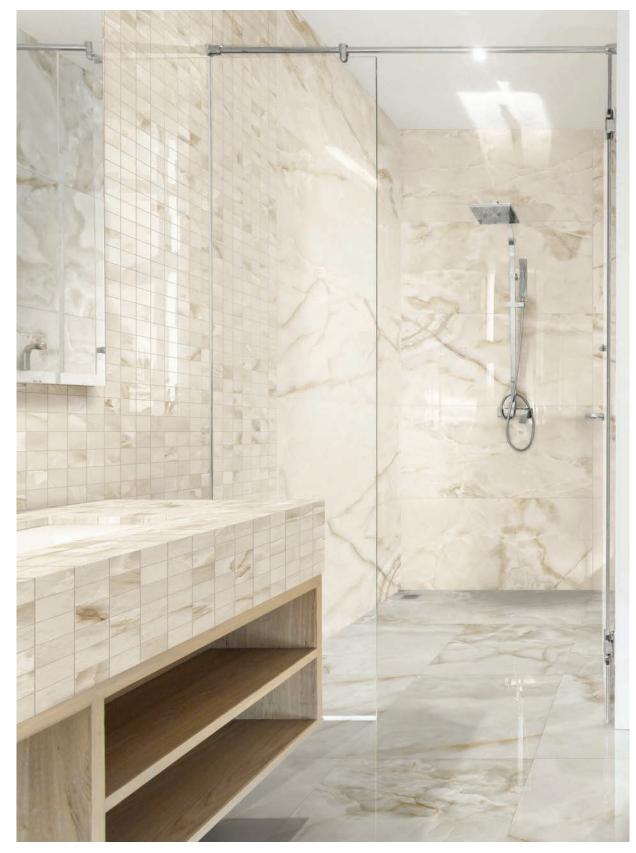

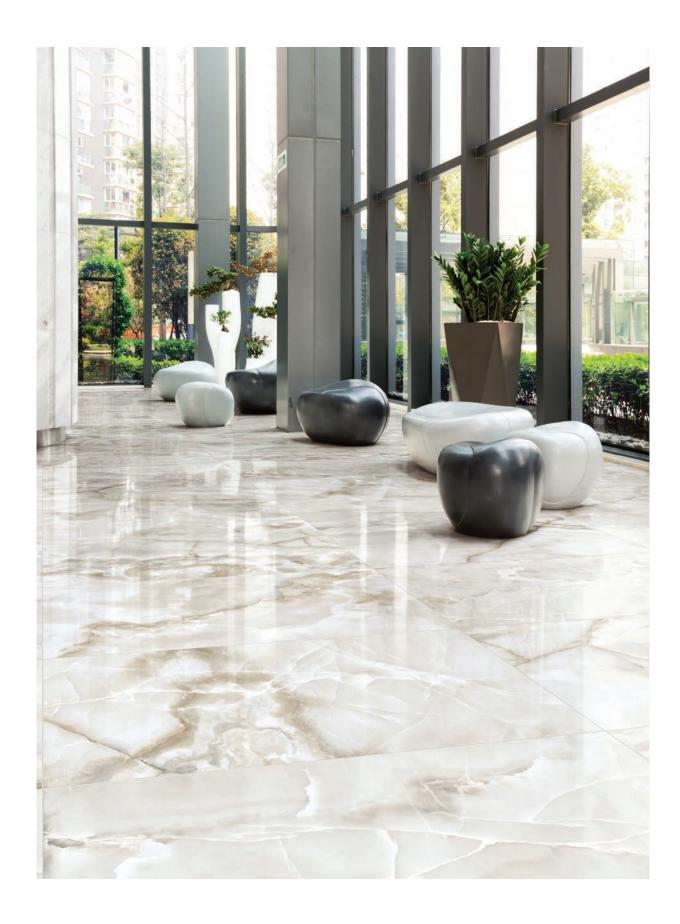

24″x48″ Field Tile in Ivory 2″x2″ Mosaic in Ivory 24″x24″ Field Tile in Light Grey

24"x48" Field Tile in White





3″x6″ Brick Mosaic in Ivory 12″x24″ Field Tile in Light Grey 24"x24" Field Tile in Ivory 12"x24" Field Tile in Ivory 3"x6" Brick Mosaic in Ivory

### **AVAILABLE IN:**

#### Field Tile

24"x48" Matte | Polished Finish 24"x24" Matte | Polished Finish 12"x24" Matte | Polished Finish

#### Mosaics

- 2"x2" Mosaic Matte | Polished Finish
- 3″x6″ Brick Mosaic Matte | Polished Finish

### Trim Pieces

Bullnose Matte | Polished Finish 3″x24″

- All sizes are NOMINAL

### MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1³/ <sub>8</sub> ″x3″ 2″x4″
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4″			*\Y\Y\>	<sup>5</sup> / <sub>8</sub> "x4"
		OCTAGONS		HEXAGONS	
A Hexagon	6"		0.1		A1 / 11
Chevron	2"×12" 6"×24"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1″x2″ 1″x4″



White



lvory



Beige

\*Other sizes available upon request



#### Light Grey



Dark Grey



## 2"X2" MOSAIC



### **3"X6" BRICK MOSAIC**





2"x2" Mosaic in Ivory 12"x24" Field Tile in Light Grey



Features	Test Method	Value		
Surface Abrasion	ASTM C1027	4		
Water Absorption	ASTM C373	≤0.5%		
Breaking Strength	ASTM C648	≥400		
Chemical Resistance	ASTM 650	Not Affected		
Dynamic Coefficient of Friction	ANSI A137.1	≥0.42 WET		
Frost Resistance	ASTM C1026	Resistant		
Stain Resistance	ASTM C1378	Not Affected		
Recycled Material	-	≥30%		
This product is GREENGUARD <sup>®</sup> certified and will contribute to USGBC registered LEED projects.				

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Color Body Porcelain Tile •
- Matte | Polished Finishes •
- 10mm Thickness •
- Rectified Edge •
- PEI Rating = 4 •
- V3 Moderate Variation
- Frost Resistance = Yes

#### GRACE Color Body Porcelain Tile

It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.



www.genrose.com



www.genrose.com