

HEMLOCK



For the most up-to-date product information, scan the QR code.

8" x 48" Floor/Wall Plank in Murano




8" x 48" Floor/Wall Plank in Sospiro
7" x 60" Riga Deco in Sospiro



7" x 60" Floor/Wall Plank in Darsena



7" x 60" Floor/Wall Plank in Fenice

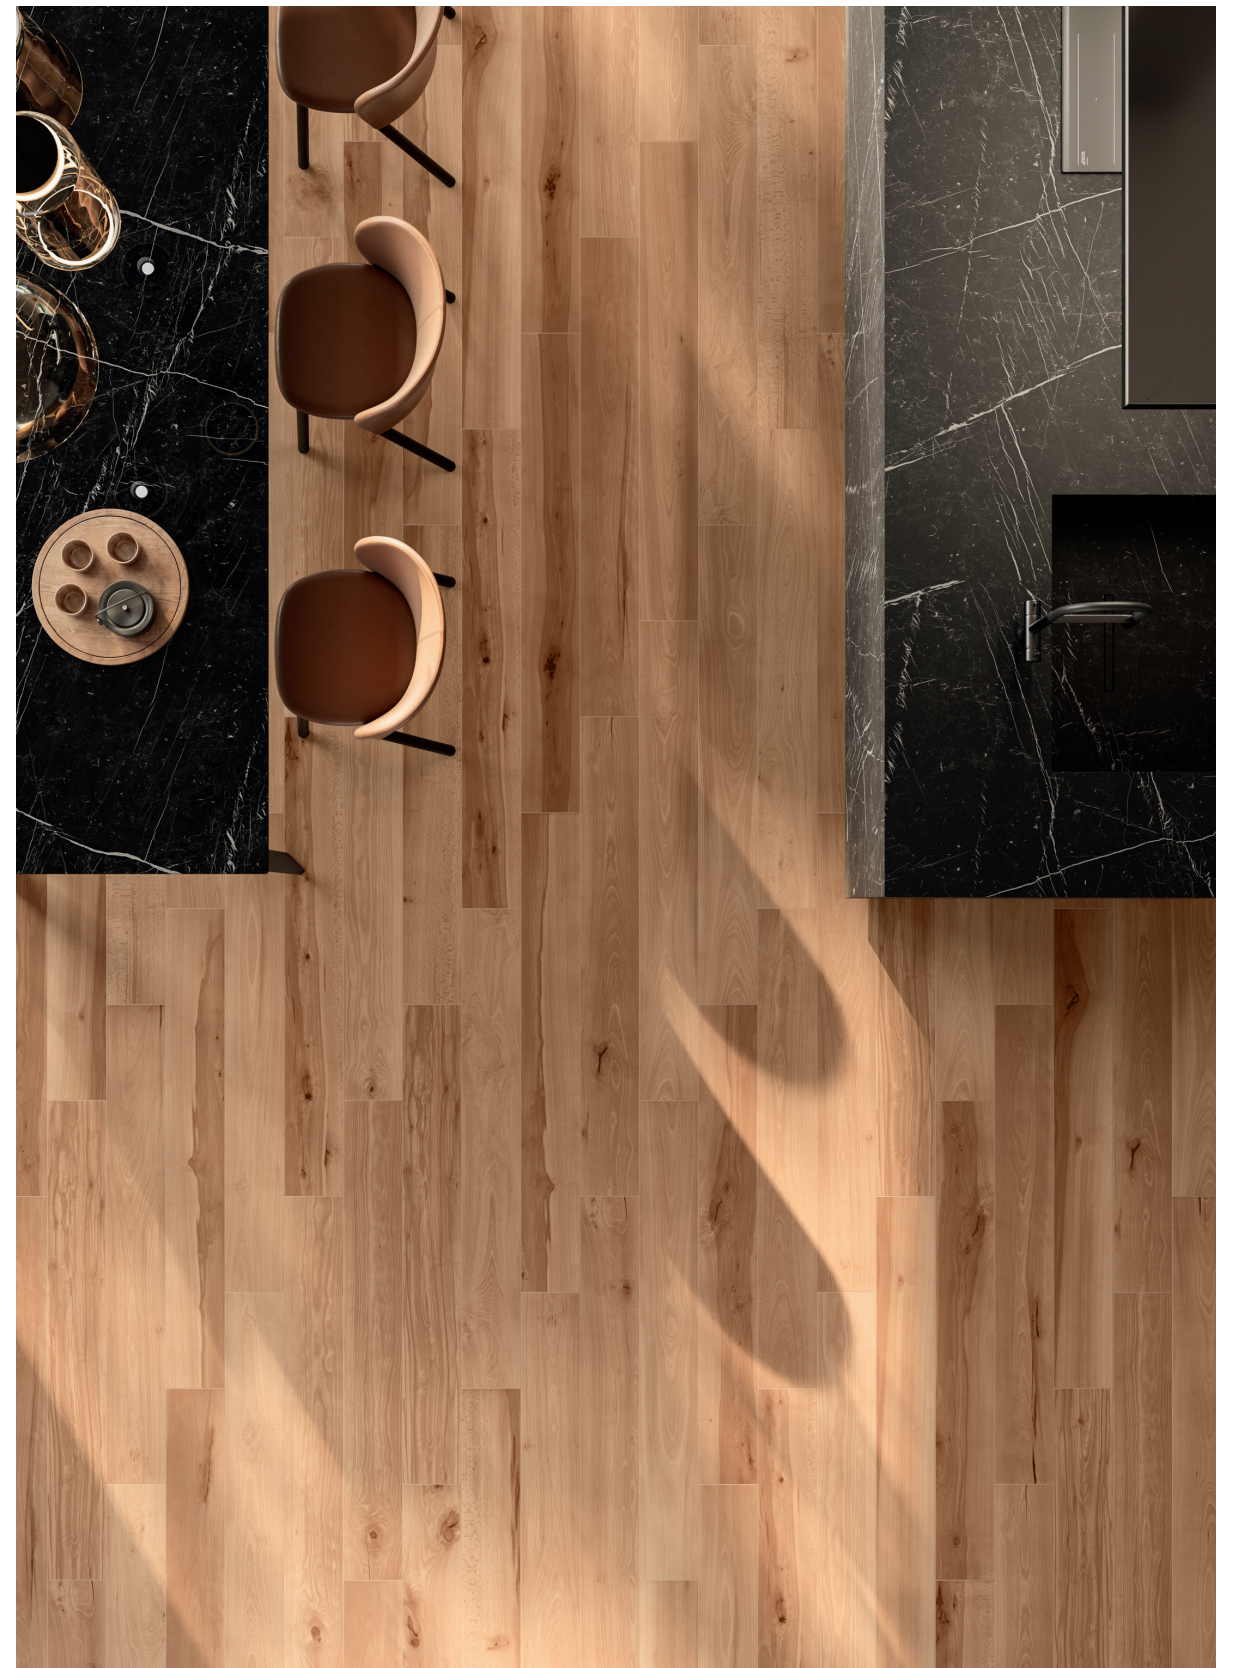

7" x 60" Floor/Wall Plank in Darsena

AVAILABLE STOCKED ITEMS:

9mm Floor/Wall Tiles - Rectified Edge		
SIZE	FINISH	COLORS
8" x 48"	Matte	Sospiro Rialto Murano Darsena Fenice

SPECIAL ORDER ITEMS:

9mm Floor/Wall Tiles - Rectified Edge		
SIZE	FINISH	COLORS
8" x 48"	Anti-Slip	Sospiro Rialto Murano Darsena Fenice
7" x 60"	Matte	Sospiro Rialto Murano Darsena Fenice

9mm Decorative Floor/Wall Tile - Rectified Edge			
SIZE	DECO TYPE	FINISH	COLORS
7" x 60"	Riga	Matte	Sospiro Rialto Murano

All Sizes are Nominal.



8" x 48" Floor/Wall Plank in Murano
7" x 60" Riga Floor/Wall Deco in Murano

COLORS:



Sospiro



Rialto



Murano



Darsena



Fenice

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

RIGA DECO:



Sospiro



Rialto



Murano








7" x 60" Riga Floor/Wall Deco in Rialto



HEMLOCK
Glazed Porcelain Tile

Features	Test Method	Value
Dimensions	ISO 10545 - 2	Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Water Absorption	ISO 10545 - 3	≤ 0.1 %
Modulus of Rupture / Bending Strength	ISO 10545 - 4	R ≥ 40 N/mm ²
Breaking Strength		S ≥ 1500 N
Deep Abrasion Resistance	ISO 10545 - 6	≤ 150 mm ³
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	≤ 7MK ⁻¹
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	A
Chemical Resistance (Low Concentration)		LA
Chemical Resistance (High Concentration)		HA
Fire Resistance	-	A1/A1 _{FL}
Slip Resistance (Wet)	ANSI A326.3	Matte DCOF 0.57
		Anti-Slip DCOF 0.62
LEED	-	Yes
Recycled Material	-	10%
VOC Emissions	-	Zero VOC
Declare	-	Red List Free
Environmental Product Declaration	-	Product-Specific
Health Product Declaration	-	Available
Greenguard	-	Greenguard Gold

This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glazed Porcelain Tile
- Rectified Edge
- Matte | Anti-Slip Finishes
- V3 - Moderate Variation
- 9mm Thickness
- Frost Resistant



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com