

HIBIKI



For the most up-to-date product information, scan the QR code.

4.5" x 9" Dimensional Wall Tile in White | Green



4.5" x 9" Dimensional Wall Tile in Blue



4.5" x 9" Dimensional Wall Tile in White | Green



4.5" x 9" Dimensional Wall Tile in White

AVAILABLE STOCKED ITEMS:

8.2mm Dimensional Wall Tile - Pressed Edge		
SIZE	FINISH	COLORS
4.5" x 9"	Matte	White Greige Green Blue Grey

All Sizes are Nominal.

COLORS:

This product is made up of 6 different faces that are randomly mixed in the box.




White




Greige



Green

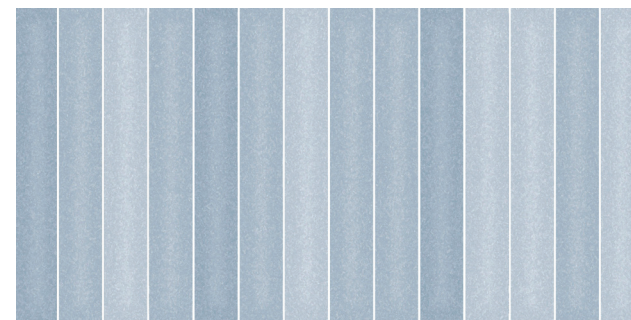

Blue

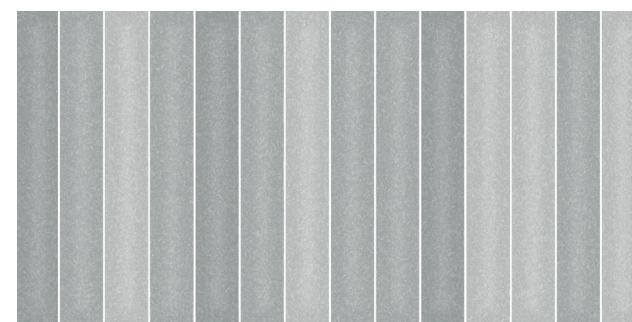

Grey




Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

V3 



HIBIKI
Glazed Porcelain Tile

Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.5mm
Thickness		≥ 0.5mm
Straightness of Sides		± 0.75%
Rectangularity		± 0.75%
Surface Flatness		± 0.5%
Surface Quality		Min. 95% of tiles free of visible defects
Water Absorption	ISO 10545-3	< 0.5%
Modulus of Rupture / Bending Strength	ISO 10545-4	> 35 N / mm ²
Thermal Shock Resistance	ISO 10545-9	Resistant
Crazing Resistance	ISO 10545-11	Resistant
Chemical Resistance (Domestic)	ISO 10545-13	GA
Chemical Resistance (Low Concentration)		GLA
LEED	-	Yes
Recycled Content	-	37%
VOC Emissions	-	Zero VOC
Environmental Product Declaration	-	Industry-Wide
Material Health Certification	-	Red List Free, Certificate Available

This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700

Hibiki is designed with a narrow "grout effect" between the dimensional fingers on the face of the tile. For aesthetics, a 3mm grout joint should net the same spacing between tiles as the "Kit Kat" sections are all separated by 3mm. This should hide the edges of the pieces for the best effect. The wall tiles can be grouted between each tile or between each tile and across the faces of the finger tiles. Unsanded grout is recommended.

EXPERT TIP: When adding grout to the face of each tile, the depth of grout between the finger grooves will change the effect produced. A shallow fill will reveal more of the contours of the grooves on the tile and will produce a thinner grout line. It is recommended that the size of the grout joint created within the finger grooves matches the size of the grout joint around the perimeter of the tiles. In addition, the grout between each finger groove must be cleaned uniformly throughout the installation in order to maintain a consistent look.

Product Info:

- Glazed Porcelain Tile
- Matte Finish
- 8.2mm Thickness
- Pressed Edge
- V3 - Moderate Variation
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com