
HIGHWAY







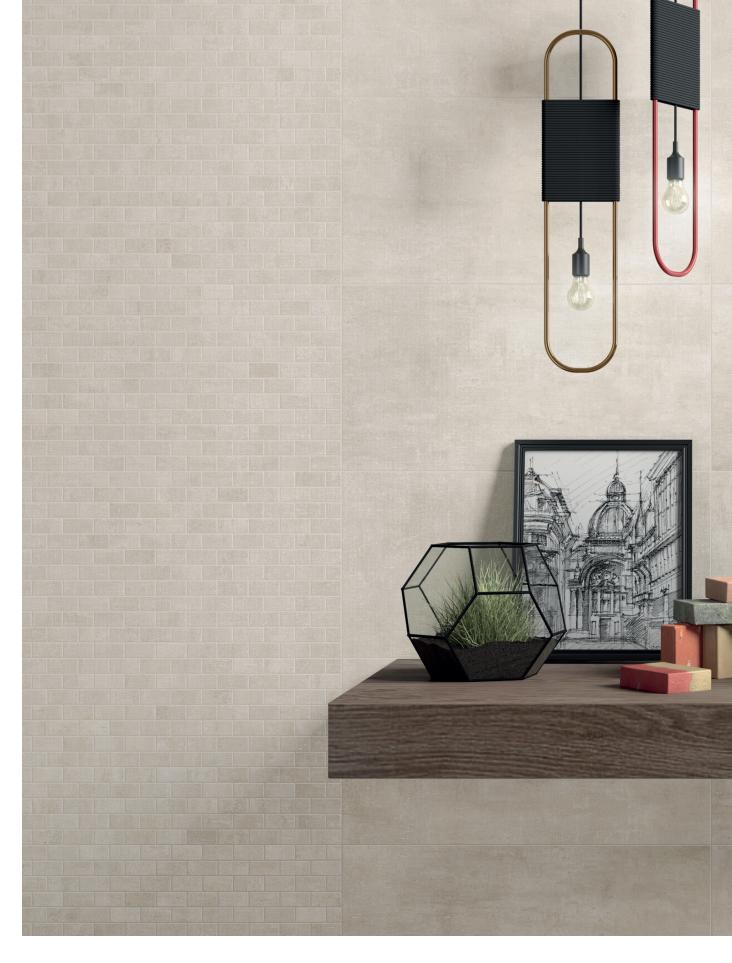

1"x2" Brick Mosaic in Ash 12"x24" Field Tile in Ash

AVAILABLE IN:

8mm Field Tile

18"x36" Honed 12"x24" Honed | Polished Finish

8mm Mosaics

2"x2" Mosaic Honed Finish
1"x2" Brick Mosaic Honed Finish

8mm Trim Pieces

4"x24" Bullnose Honed Finish 6"x12" Cove Base Honed Finish

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to		2" 4"		1 ³ / ₈ "x3" 2"x4"
	a smaller size in any length and width combination with a 1" minimum.	BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"×2" 2"×4" ⁵ / ₈ "×4"
Diamond	4"	0.074	OONG	V V V	
Hexagon	6"	OCTAGONS		HEXA	GONS
Chevron	2"x12" 6"x24"		2" w/ 0.6" Squares		1¹/ ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

^{*}Other sizes available upon request






Blanc Ash



Fog





⁻ All sizes are nominal

^{*}Polished Finish is only available in Blanc

2"X2" MOSAIC







Blanc


Ash

Fog

1"X2" BRICK MOSAIC







Blanc

Ash

Fog

TRIM PIECES





Cove Base

Bullnose



1"x2" Brick Mosaic in Ash 12"x24" Field Tile in Ash



HIGHWAYColor Body Porcelain Tile

Features	Test Method	Value	
Water Absorption	ASTM C373	≤0.1%	
Thickness Dimension	ASTM C499	≤±0.04 Inc.	
Facial Dimension	ASTM C499	≤ ± 0.25%	
Warpage Average Diagonal	ASTM C485	≤ ± 0.40%	
Warpage Average Edge	ASTM C485	≤ ± 0.40%	
Wedging	ASTM C502	≤ ± 0.25%	
Bond Strength	ASTM C482	≥ 200 psi	
Breaking Strength	ASTM C648	≥ 400 lb.	
Hardness (Mohs)	Scratch Test (No regulated)	≥ 7	
Visible Abrasion Resistance for Glazed Tiles	ASTM C1027	Class 4	
Frost Resistance	ASTM C1026	Resistant	
Chemical Resistance	ASTM C650	Class A	
Stain Resistance	ASTM C1378	Class A*	
DCOF	BOT 3000	≥0.48*	
Aesthetic Classification	Visual Evaluation Shade & Texture	V2	
Recycled Material	-	≥40%	



This product is GREENGUARD® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide.

Product Info:

- Color Body Porcelain Tile
- Honed | Polished Finish
- 8mm Thicknesses
- Rectified Edge
- Frost Resistance = Yes
- PEI Rating = 4
- V2 Slight Shading Variation

www.genrose.com

^{*}All values given are for matte or honed material. No values are given for polished material. GENROSE does not recommend polished surfaces in areas subject to exposure from grease, oil or water.



www.genrose.com