
# **INDUSTRY**









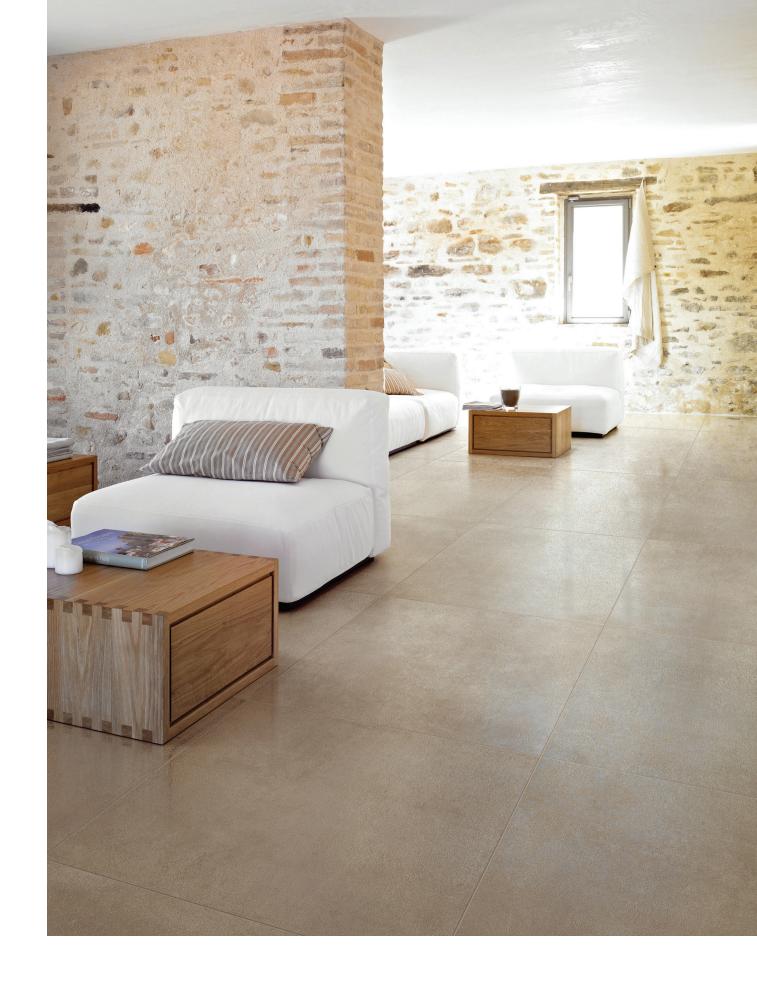


24"x48" Field Tile in Plomb

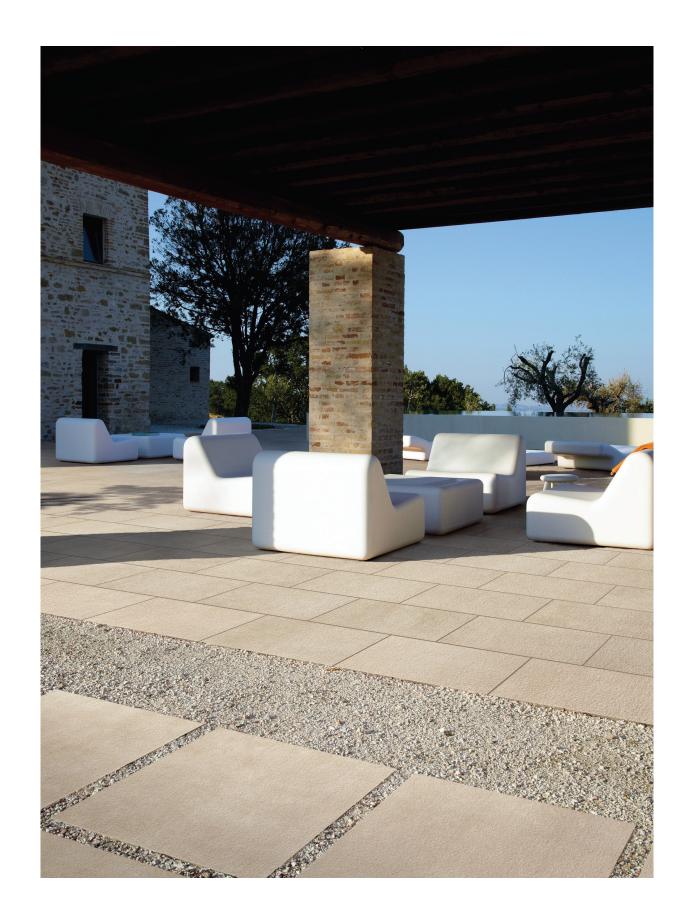

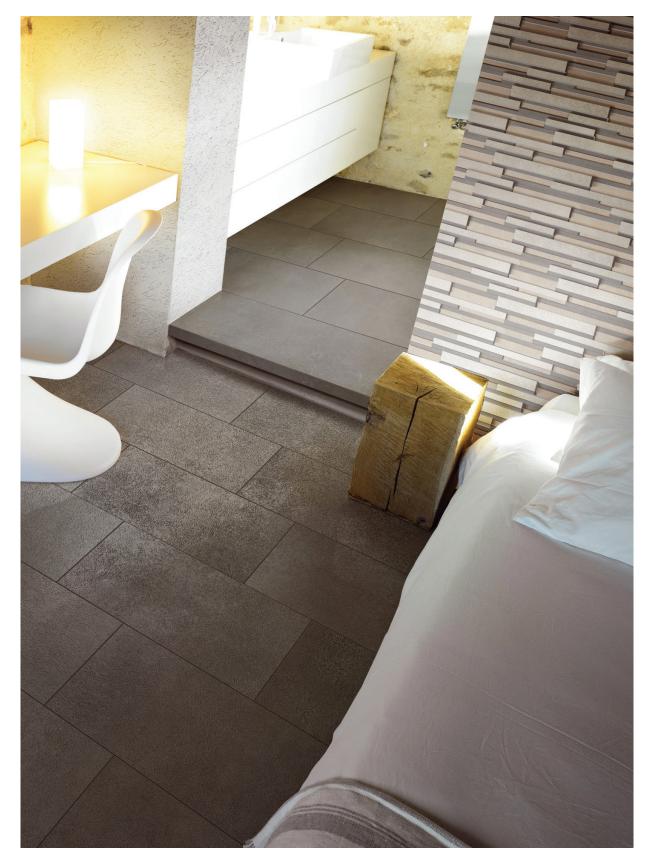

6"x24" Staggered Listello in Ivory | Moka | Taupe 12"x24" Field Tile in Plomb 13"x48" Gradino in Plomb



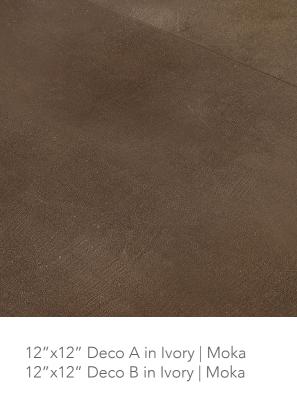

47"x94" Slab in Ivory 47"x94" Slab in Moka



### **AVAILABLE SPECIAL ORDER ITEMS:**

#### 6mm Slabs

Rectified Edge

47"x94" Matte | Anti-Slip Finish

47"x110" Matte Finish

63"x126" Matte Finish

#### 6mm Field Tiles

Rectified Edge

24"x48" Matte Finish

32"x32" Matte Finish 48"x48" Matte | Anti-Slip Finish

Matte Finish 63"x63"

#### 9mm Field Tiles

Rectified Edge

8"x32" Matte | Soft Finish

12"x24" Matte | Soft | Bush-Hammered Finish

16"x32" Matte | Soft Finish

24"x24" Matte | Soft Finish

Matte | Soft Finish 24"x48"

Matte | Soft Finish 32"x32"

#### 20mm Outdoor Paver

Rectified Edge

24"x24" Bush-Hammered Finish

### Mosaics + Decos

1"x1" Mosaic Matte Finish 6"x24" Staggered Listello Mosaic

12"x12" Deco A 12"x12" Deco B

63"x63" Puzzle Deco

#### **Trim Pieces**

2"x24" Bullnose Matte | Soft Finish 13"x48" Gradino Matte | Soft Finish

## MADE TO ORDER FIELD TILES AND MOSAICS:


This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
can be cut down a smaller size in	Any 24" field tile can be cut down to		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
	length and width	BRICKS		DIAMONDS	
	combination with a 1" minimum.		1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES		CHEVRONS		HERRINGBONE	
	6.7" Base Half Hexagon		2"x12"		1"x2" 2"x4"
$\Diamond$	4" Diamond 6"			* > >	<sup>5</sup> / <sub>8</sub> "×4"
		OCTAGONS		HEXAGONS	
	Hexagon 2"x2"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
	Chevron	333333	.,,		_
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2.5" w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"

<sup>\*</sup>Other sizes available upon request



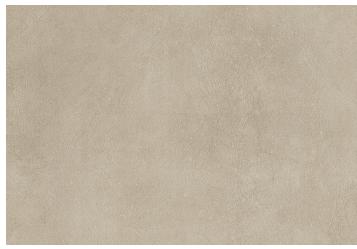

lvory Sage





Taupe Steel





Moka **Plomb** 

Colors shown may vary from actual product. Final selection should be made from actual product samples.





<sup>-</sup> All sizes are NOMINAL

## DECO A



Taupe / Ivory

Moka / Taupe





Sage / Plomb



Plomb / Steel







Noka / Taupe Mix





Sage / Plomb / Steel Mix

DECO B



Taupe / Ivory



Moka / Taupe



Sage / Plomb



**PUZZLE DECO** 







Sage



Moka



Steel



Plomb

Ivory Taupe

1"X1" MOSAIC






Taupe



Sage



Moka



Steel






Plomb

**TRIM PIECES** 

Ivory









Baseboard Bullnose Step Gradino

### **INDUSTRY**

Through Body Porcelain Tile

~			111100	gir body i orceiain The	
Features	Test Method	Value			
Length And Width		± 0.15%			
Thickness	ISO 10545-2	± 5%			
Warpage Of Edges		± 0.1%			
Wedging		± 0.2%			
Flatness		6mm	9mm	20mm	
Tidiless		± 0.2%	± 0.35%	± 0.35%	
Surface Quality		At least 95% of the tiles are free from visible flaws			
Water Absorption	ISO 10545-3	0.08%			
Bending Strength (Avg. Value)	ISO 10545-4	6mm	9mm	20mm	
benuing offength (Avg. value)		52 N/mm <sup>2</sup>	50 N/mm²	52 N/mm <sup>2</sup>	
Breaking Strength (Avg. Value)		1350 N	2200 N	14000 N	
Resistance to Deep Abrasion (Avg. Value)	ISO 10545-6	140 mm³			
Thermal Shock Resistance	SO 10545-9	Resistant			
Frost Resistance	ISO 10545-12	Resistant			
Resistance of Chemical Attack	ISO 10545-13	High Concentration	Low Concentration	Domestic Chemicals	
Resistance of Offennear Attack		Soft = UHA - UHB	ULA - ULB	UA	
Stain Resistance	ISO 10545-14	6mm	9mm	20mm	
Stalli Resistalice		Class 4	Class 3-4	Class 4	
Slip Resistance	ANSI 137.1-2012 DCOF	> 0.42			
Recycled Content	-	6mm   9mm - 13.9% Steel, Moka, Plomb; 7.1% Taupe, Sage, Ivory 20mm - 13.47% Ivory; 13.82% Sage; 13.83% Taupe; 15.97% Moka, Plomb; 16% Steel Slabs - 0% Ivory; 7% Others			
VOCs	-	No Emissions			



This product is GREENGUARD® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Through Body Porcelain Tile
- Matte | Soft | Bush-Hammered | Anti-Slip Finish
- 6mm | 9mm | 20mm Thickness
- Rectified Edge
- V2 Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com