# KOLORE










24"x24" Field Tile in Malva | Ceniza





24"x48" Field Tile in Mango 24"x24" Field Tile in Gris

2"x2" Mosaic in Gris | 24"x48" Field Tile in Gris 24"x24" Field Tile in Negro

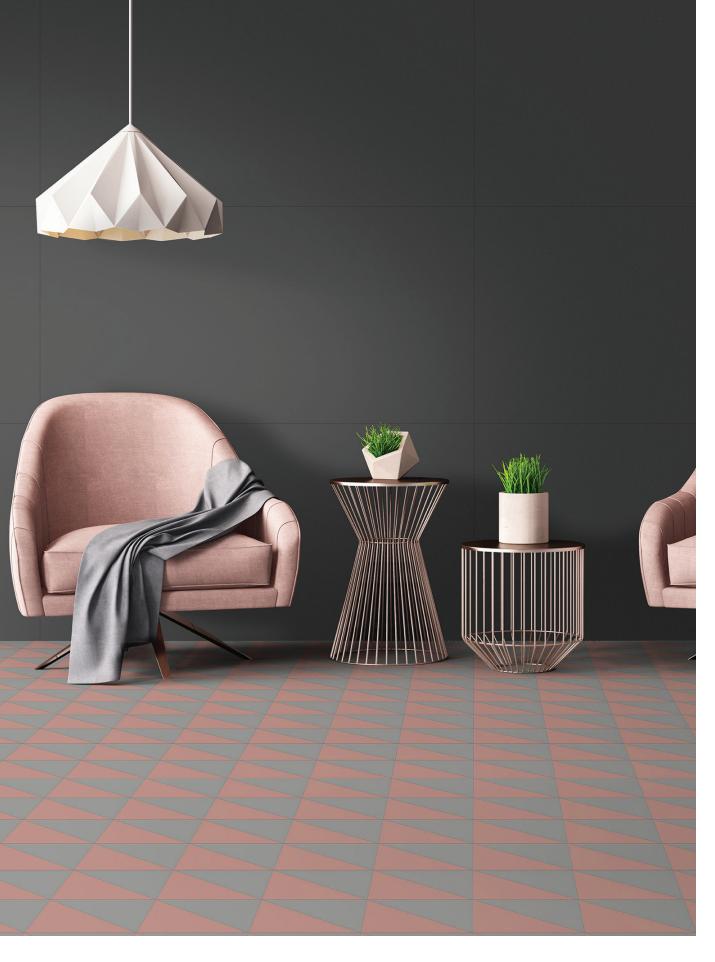



24"x48" Field Tile in Grafito Mosaic Available as Custom Order

24"x24" Field Tile in Gris Mosaic Available as Custom Order

## **AVAILABLE IN:**


#### Field Tile

24"x48" Matte Finish | Polished Finish 24"x24" Matte Finish | Polished Finish 32"x32" Matte Finish 12"x24" Matte Finish | Polished Finish

### Mosaics

2"x2" Mosaic Matte Finish Hydraulic Mosaic Matte Finish

#### **Trim Pieces**



- All sizes are nominal

### MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.


FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> /8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"				<sup>5</sup> / <sub>8</sub> "x4"
Ť		OCTAGONS		HEXAGONS	
Hexagon	6"	<del></del>		, and the second	
Chevron	2"×12" 6"×24"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> /2" w/ <sup>5</sup> /8" Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1 "x2" 1 "x4"

Other sizes available upon request



Grafito

Ceniza




Rojo

Blanco

Mango



Malva



Azul








Negro







Pistacho





Features	Test Method	Value		
Length And Width	ISO 10545-2	±0.2%		
Thickness	ISO 10545-2	±5%		
Warpages Of Edges	ISO 10545-2	±0.2%		
Wedging	ISO 10545-2	±0.25%		
Central And Edge Curvature	ISO 10545-2	±0.2%		
Warpage	ISO 10545-2	±0.2%		
Water Absorption	ISO 10545-3	≤ 0.1%		
Bending Strength	ISO 10545-4	≥ 35 N/MM <sup>2</sup>		
Breaking Strength	ISO 10545-4	≥ 1300 N		
Impact Resistance	ISO 10545-5	.85		
Resistance to Deep Abrasion	ISO 10545-6	<145 mm <sup>3</sup>		
Linear Thermal Expansion	ISO 10545-8	Resistant		
Thermal Shock Resistance	ISO 10545-9	Resistant		
Frost Resistance	ISO 10545-12	Resistant		
Resistance of Chemical Attack	ISO 10545-13	HighLowDomesticConcentrationConcentrationChemicalsUHAULAUA		
Stain Resistance	ISO 10545-14	Class 4		
Color Resistance to Light	DIN 51094	Resistant		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Through Body Porcelain Tile
- Matte | Polished Finishes •
- 10mm | 11.5mm Thicknesses •
- Rectified Edge •
- V1 Uniform Appearance
- Frost Resistance = Yes

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

#### KOLORE Through Body Porcelain Tile



www.genrose.com



www.genrose.com