


**LINK**

 **GENROSE**






**Triangle** 5.2"x4.5" Wall Tile in Acciaio | Bronzo | Oro

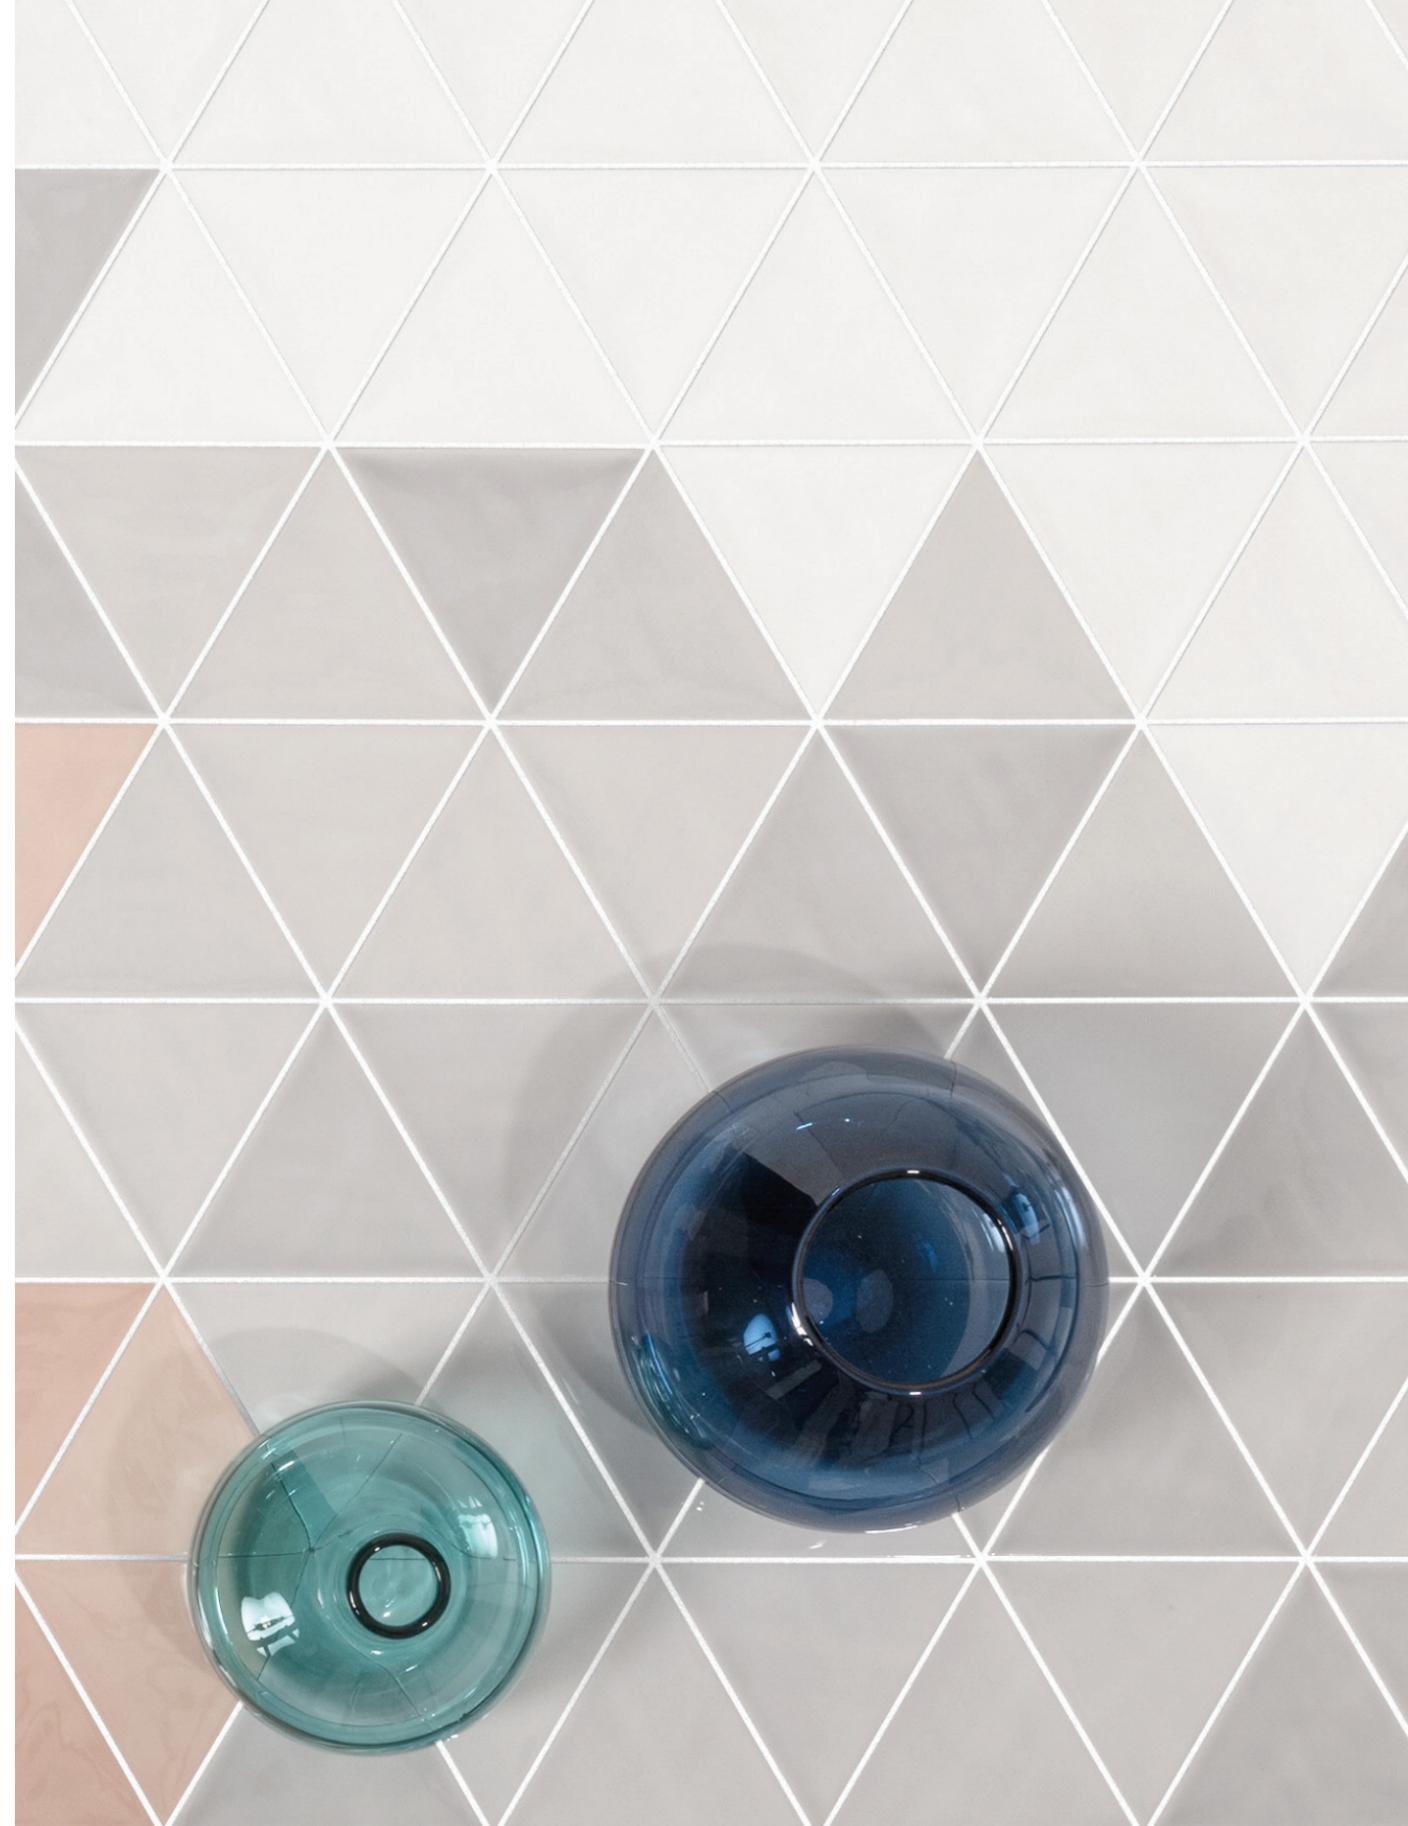

**Triangle** 5.2"x4.5" Wall Tile in Bianco | Rosa | Grigio Medio

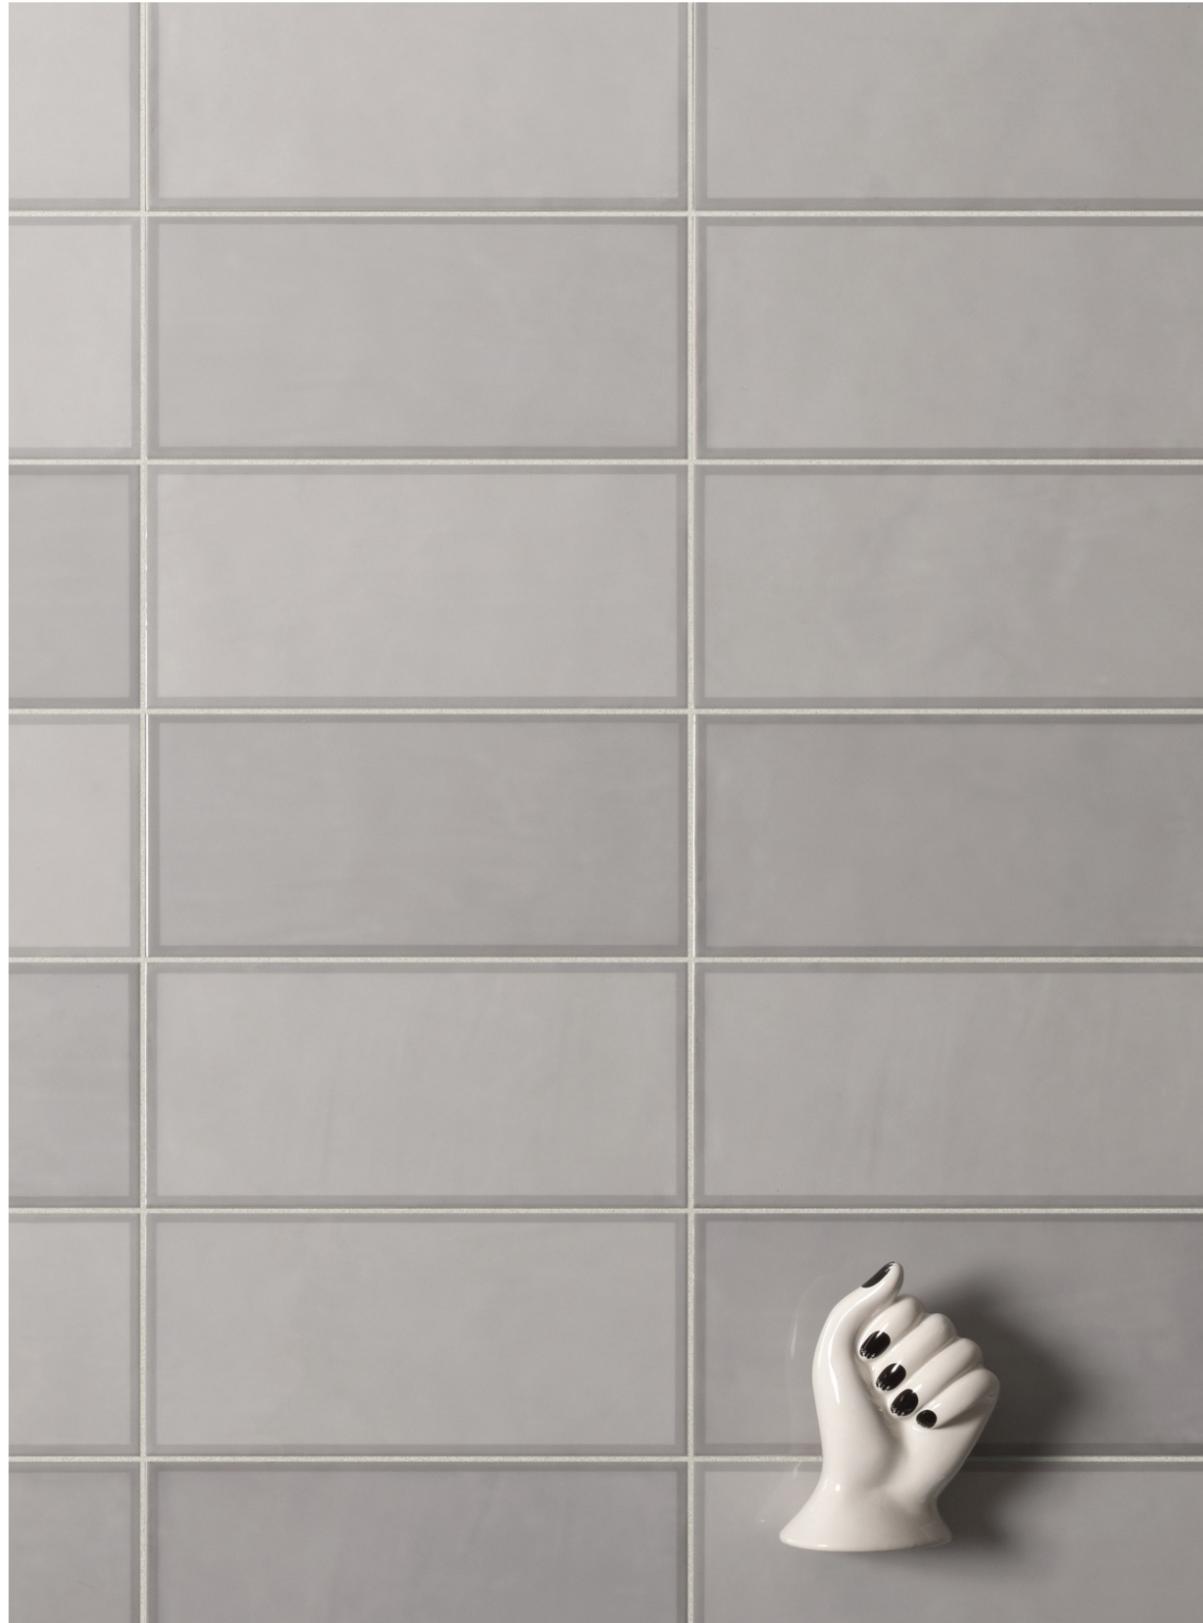

**Rectangle** 5.2"x10.5" Deco Tile in Grigio Medio



**Rectangle** 5.2"x10.5" Deco Tile in Bianco | Grigio Chiaro | Grigio Medio | Grigio Scuro | Carta Da Zucchero  
**Rectangle** 5.2"x10.5" Wall Tile in Bianco | Grigio Chiaro | Grigio Medio | Grigio Scuro | Carta Da Zucchero



Wood 2.4"x11.8" Field Tile in Bianco



Wood 2.4"x11.8" Field Tile in Beige

## AVAILABLE IN:

### Triangle Wall Tiles

5.2"x4.5" *Glossy | Metal Finish*

### Rectangle Wall Tiles

5.2"x10.5" *Wall Glossy Finish*  
5.2"x10.5" *Deco Glossy Finish*


### Wood Field Tiles

2.4"x11.8" *Matte Finish*

### Special Pieces

0.5"x10.5" *Jolly Glossy Finish*


- All sizes are NOMINAL

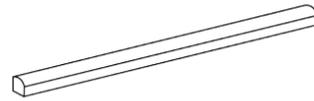

## TRIANGLE + RECTANGLE



**Bianco**



**Grigio Chiaro**



**Grigio Medio**



**Grigio Scuro**



**Carta Da Zucchero**



**Rosa**



**Acquamarina**



**Bronzo**



**Oro**



**Acciaio**



## WOOD



**Bianco**

**Beige**

**Grigio**

**Carta Da Zucchero**

Colors shown may vary from actual product. Final selection should be made from actual product samples.



Features	Test Method	Value
Length and Width	UNI-EN ISO 10545-2	± 0.5%
Thickness	UNI-EN ISO 10545-2	± 10%
Straightness of Sides	UNI-EN ISO 10545-2	± 0.3%
Rectangularity	UNI-EN ISO 10545-2	± 0.5%
Surface Flatness - Centre Curvature	UNI-EN ISO 10545-2	± 0.5% - 0.3%
Surface Flatness - Side Curvature	UNI-EN ISO 10545-2	± 0.5% - 0.3%
Surface Flatness - Warping	UNI-EN ISO 10545-2	± 0.5%
Breaking of Rupture	UNI-EN ISO 10545-4	> 600 N (≥ 7.5 MM) > 200 N (< 7.5 MM)
Modulus of Rupture	UNI-EN ISO 10545-4	> 12 N/MM <sup>2</sup> (≥ 7.5 MM) > 15 N/MM <sup>2</sup> (< 7.5 MM)
Scratch Resistance (MOHS)	EN-101	3*
Water Absorption	UNI-EN ISO 10545-3	> 10 %
Color Resistance to Light	DIN 51094	Resistant
Linear Thermal Expansion Coefficient(100°C)	UNI-EN ISO 10545-8	Test Method Available
Thermal Shock Resistance	UNI-EN ISO 10545-9	Resistant*
Resistance to Stains	UNI-EN ISO 10545-14	Class 5*
Chemical Resistance	UNI-EN ISO 10545-13	GB Min.*
Lead and Cadmium Given Off	UNI-EN ISO 10545-15	Test Method Available
Reaction to Fire	EN 13501-1	A1

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

\*Excluding Metallic Colors (Oro, Bronzo, Acciaio)

**Product Info:**

- Ceramic Tile
- Glossy | Metal Finishes
- 9mm Thickness
- Pressed Edge
- V2 (Bianco) | V3 (All Other Colors) | V4 (Grigios)
- Frost Resistance = No



[www.genrose.com](http://www.genrose.com)

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

Features	Test Method	Value
Length and Width	UNI-EN ISO 10545-2	± 0.6%
Thickness	UNI-EN ISO 10545-2	± 5%
Straightness of Sides	UNI-EN ISO 10545-2	± 0.5%
Rectangularity	UNI-EN ISO 10545-2	± 0.5%
Surface Flatness - Warping	UNI-EN ISO 10545-2	± 0.5%
Breaking of Rupture	UNI-EN ISO 10545-4	> 1300 N (≥ 7.5 MM) > 700 N (< 7.5 MM)
Modulus of Rupture	UNI-EN ISO 10545-4	> 35 N/MM <sup>2</sup> (≥ 7.5 MM)
Scratch Resistance (MOHS)	EN-101	≥ 5
Resistance to Abrasion of Glazed Tiles	UNI-EN ISO 10545-7	Class 4 Light Colors Class 3 Dark Colors
Water Absorption	UNI-EN ISO 10545-3	≤ 0.5 %
Color Resistance to Light	DIN 51094	Resistant
Linear Thermal Expansion Coefficient(100°C)	UNI-EN ISO 10545-8	Test Method Available
Thermal Shock Resistance	UNI-EN ISO 10545-9	Resistant
Frost Resistance	UNI-EN ISO 10545-12	Resistant
Crazing Resistance	UNI-EN ISO 10545-11	Resistant
Resistance to Stains	UNI-EN ISO 10545-14	Class 5
Chemical Resistance	UNI-EN ISO 10545-13	GB Min.
Lead and Cadmium Given Off	UNI-EN ISO 10545-15	Test Method Available
Reaction to Fire	EN 13501-1	A1 <sub>FL</sub> -A1
Wet Dynamic Coefficient of Friction (DCOF)	ANSI A137.1 - BOT 3000	≥ 0.42

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Glazed Porcelain Tile
- Matte Finish
- 9mm Thickness
- Pressed Edge
- PEI Rating = 4 (Light Colors) | 3 (Dark Colors)
- V4 - **EXTREME** Variation
- Frost Resistance = Yes



[www.genrose.com](http://www.genrose.com)

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



[www.genrose.com](http://www.genrose.com)