

**MAYAS**

 **GENROSE**



For the most up-to-date product information, scan the QR code.

4" x 16" Wall Tile in Sidewalk  
4" x 16" Wall Tile in Lullaby



4" x 12" Wall Tile in Arctic



4" x 12" Wall Tile in Gris



4" x 16" Wall Tile in Leaf  
4" x 16" Ripple Wall Dimensional in Leaf



4" x 16" Wall Tile in Sidewalk  
4" x 16" Ripple Wall Dimensional in Sidewalk



4" x 16" Wall Tile in Navy

## STOCKED ITEMS:

7mm Wall Tiles - Pressed Edge		
SIZE	FINISH	COLORS
4" x 12"	Matte   Glossy	Arctic
4" x 16"		

## SPECIAL ORDER ITEMS:

7mm Wall Tiles - Pressed Edge		
SIZE	FINISH	COLORS
4" x 12"	Matte   Glossy	Nuage   Sidewalk   Storm   Gris   Lullaby   Indigo   Leaf   Navy   Black
4" x 16"		

7mm Wall Dimensional Tiles - Pressed Edge			
SIZE	FINISH	TYPE	COLORS
4" x 16"	Matte   Glossy	Ripple	Arctic   Nuage   Sidewalk   Storm   Gris   Lullaby   Indigo   Leaf   Navy   Black
		Station	


5mm Trim Pieces - Pressed Edge		
SIZE	FINISH	COLORS
1/4" x 8"	Matte   Glossy	Arctic   Nuage   Sidewalk   Storm   Gris   Lullaby   Indigo   Leaf   Navy   Black

All Sizes are Nominal.



4" x 12" Wall Tile in Arctic

## COLORS:

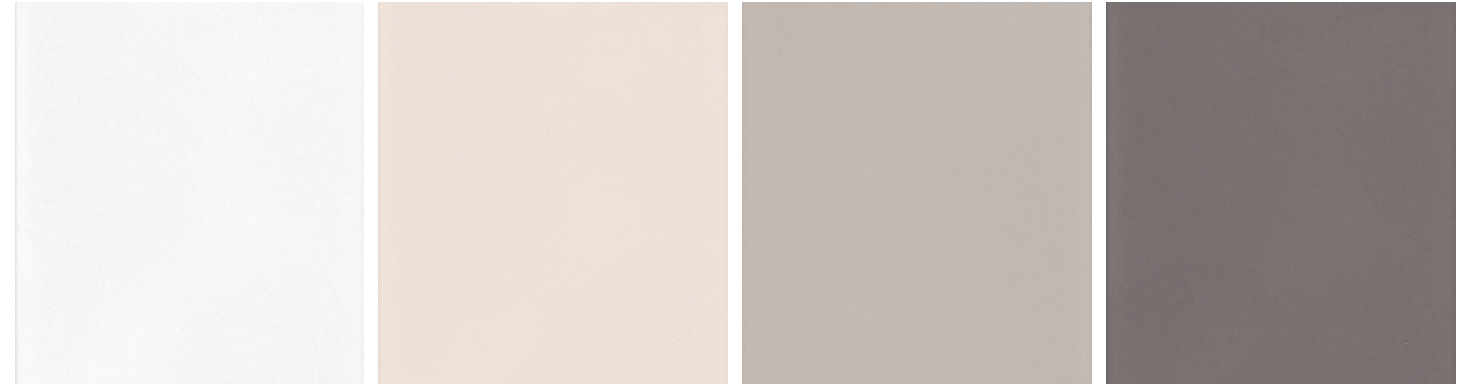

Arctic

Nuage

Sidewalk

Storm



Gris

Lullaby

Indigo

Leaf



Navy

Black

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

## RIPPLE DECO:



Arctic



Nuage



Sidewalk



Storm



Gris



Lullaby




Indigo



Leaf




Navy



Black

## STATION DECO:



Arctic



Nuage



Sidewalk



Storm



Gris



Lullaby



Indigo



Leaf



Navy



Black



4" x 16" Station Wall Dimensional in Arctic

Features	Test Method	Value
Length and Width	ASTM C499	Compliant
Thickness		Compliant
Straightness of Sides		Compliant
Rectangularity		Compliant
Surface Flatness		Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Warpage	ASTM C485	Compliant
Wedging	ASTM C502	Compliant
Water Absorption	ASTM C373	≥ 7 %
Breaking Strength	ASTM C648	≥ 250 lbf
Coefficient of Linear Thermal Expansion	ASTM C372	7.8 x 10 <sup>-6</sup>
Thermal Shock Resistance	ASTM C484	Resistant
Crazing Resistance	ASTM C424	Resistant
Chemical Resistance	ASTM C650	A
Chemical Resistance (Low Concentration)		LA
Chemical Resistance (High Concentration)		HA
Fire Resistance	-	A1/A1 <sub>FL</sub>
Recycled Content	-	62%
Environmental Product Declaration	-	Certified
LEED	-	Yes
Declare	-	Red List Free
Health Product Declaration	-	Available
VOC Emissions	-	Zero VOC

This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Disclaimer:** DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

**Product Info:**

- Ceramic Tile
- Matte | Glossy Finishes
- 5mm | 7mm Thicknesses
- Pressed Edge
- V1 - Uniform Appearance
- Not Frost Resistant





[www.genrose.com](http://www.genrose.com)