
MELANGE







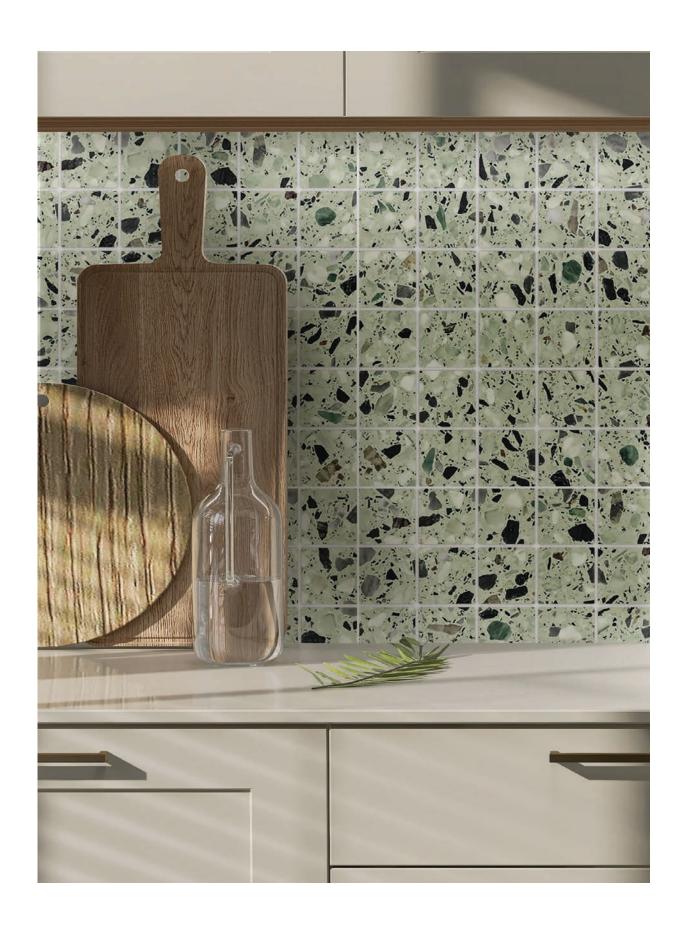

24" x 24" Field Tile in Cream

AVAILABLE STOCK ITEMS:

9mm Field Tiles							
SIZE	FINISH		FINISH				
24"x 24"	Natural		White Cream Leaf Sugar				
9mm Mosaics							
SHEET SIZE	TYPE	FINISH	FINISH				
12"x 12"	2"x 2" Mosaic	Natural	White Cream Leaf Sugar				

All Sizes are Nominal.


MADE TO ORDER FIELD TILES AND MOSAICS: Minimum quantity required. Contact your sales representative for more information.


This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile		2" 4"		1³/ ₈ "x3" 2"x4"
	a smaller size in any length and width	BRICKS		DIAMONDS	
	combination with a 1" minimum.		1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"			\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	⁵ / ₈ "x4"
		OCTAGONS		HEXAGONS	
\ \ \ \ Hexagon	6"		0,4		41/ //
Chevron	2"x12" 6"x24"		2" w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZO	ID W/ DOT	SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"

^{*}Other sizes available upon request

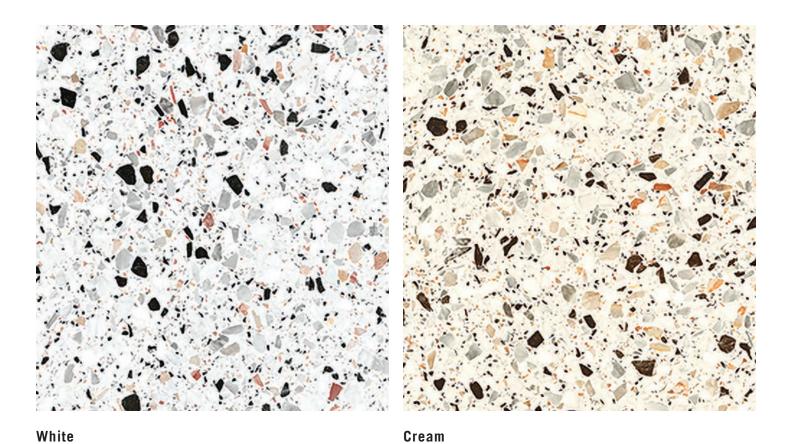


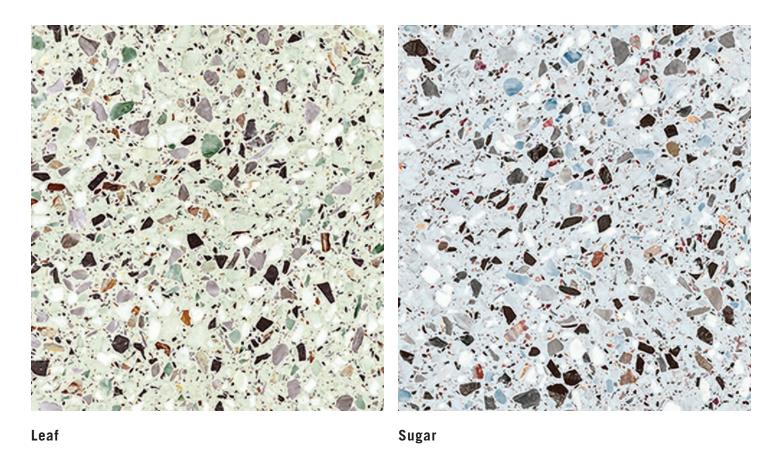


Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.




2"X2" MOSAIC













MELANGE

Color Body Porcelain Tile

Features	Test Method	Value	
Length and Width		±0.9	
Thickness		±0.5	
Linearity	ISO 10545 - 2	±0.75	
Wedging		±0.75	
Warpage		±0.75	
Water Absorption	ISO 10545 - 3	E ≤ 0.5%	
Modulus of Rupture	100 40545 4	≥ 35 N/mm²	
Breaking Strength	ISO 10545 - 4	≥ 1300 N	
Impact Resistance	ISO 10545 - 5	0.87	
Abrasion Resistance	ISO 10545 - 7	2 - 4	
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	6.5 x 10 ⁻⁶ /°C	
Thermal Shock Resistance	ISO 10545 - 9	Resistant	
Moisture Expansion	ISO 10545 - 10	0.1 mm/m	
Crazing Resistance	ISO 10545 - 11	Resistant	
Frost Resistance	ISO 10545 - 12	Resistant	
Resistance to Chemicals	ISO 10545 - 13	Min Class B	
Resistance to Staining	ISO 10545 - 14	Min Class 3	
Reaction to Fire	ISO 10545 - 15 UNI EN ISO13501/1	Class A1-A1 _{FL}	
Slip Resistance	DIN 51130	R10	
Suh vesistance	ANSI DCOF A137.1-2012	> 0.42	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Natural Finish
- 9mm Thickness
- Rectified Edge
- PEI Rating = 4
- V2 Slight Shading Variation
- Frost Resistance = Yes

Disclaimer: DCOF wet and dry is different on every production lot and can vary. If the spec listed is over the minimum standard, it will meet the requirement.

www.genrose.com



www.genrose.com