

MODSTONE



For the most up-to-date product information, scan the QR code.

4.5" x 4.5" Floor/Wall Tile in Silver
4.5" x 9" Floor/Wall Tile in Silver



4.5" x 4.5" Floor/Wall Tile in Grey
9" x 9" Floor/Wall Tile in Grey

AVAILABLE STOCKED ITEMS:

8.5mm Floor/Wall Tiles - <i>Pressed Edge</i>		
SIZE	FINISH	COLORS
4.5" x 4.5"	Matte	Silver Beige Grey
4.5" x 9"	Matte	Silver Beige Grey
9" x 9"	Matte	Silver Beige Grey



4.5" x 4.5" Floor/Wall Tile in Beige
9" x 9" Floor/Wall Tile in Beige

COLORS:



Silver




Beige




Grey

Colors shown may vary from actual product. Final selection should be made from actual product samples.
Products and availability are subject to change, please refer to our website for the most up to date selection.


SUGGESTED PATTERNS FOR COLLECTION:

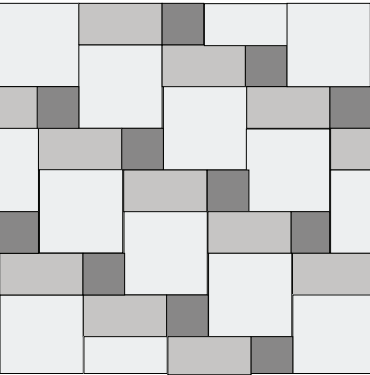


L 57% / M 28% / S 14%

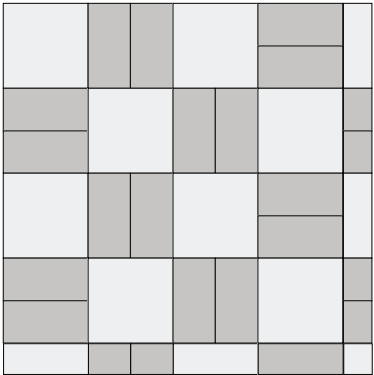


L 50% / M 50%

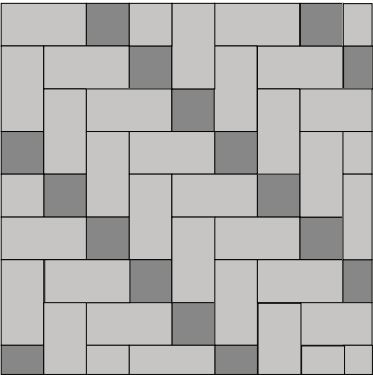


M 80% / S 20 %

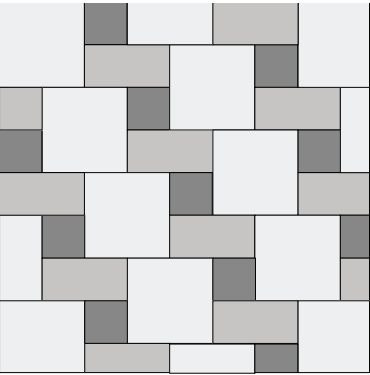


L 57% / M 28% / S 14

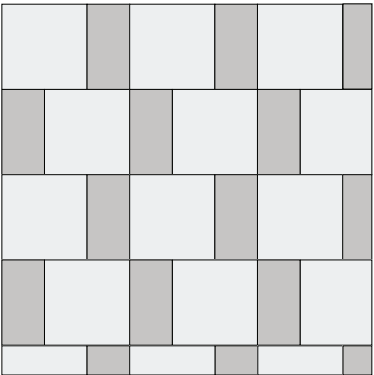


L 66% / M 33%

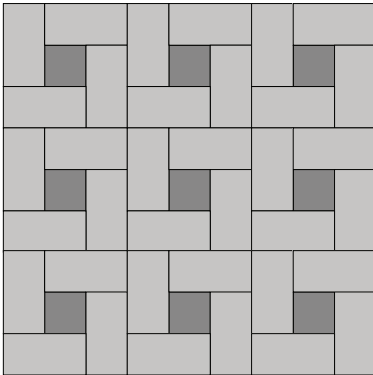


M 88% / S 11%

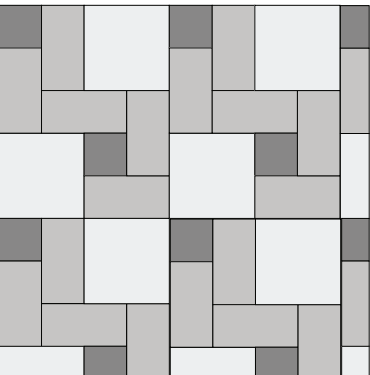


L 40% / M 50% / S 10%

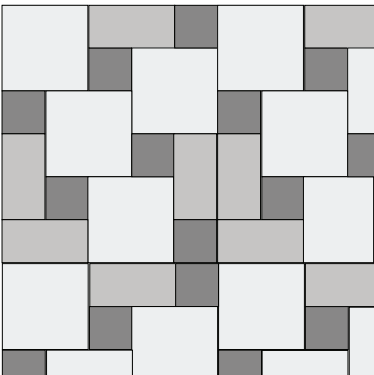

L 53% / M 26% / S 20%

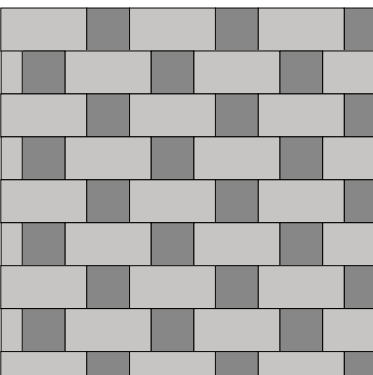

M 66% / S 33%

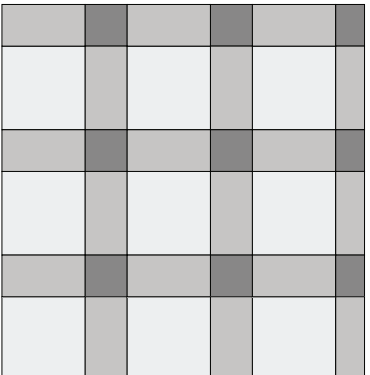

L 44% / M 44% / S 11



The percentages shown are indicative only and should be adjusted to the specific requirements of each project. It is recommended to allow for an additional 10% of material to account for cuts, wastage, and replacements.



MODSTONE
Glazed Porcelain Tile

Features	Test Method	Value
Length and Width	ISO 10545 - 2	± 0.5mm
Thickness		± 5%
Straightness of Sides		± 0.5%
Rectangularity		± 0.5%
Surface Flatness		± 0.5%
Surface Quality		Min. 95% of tiles free of visible defects
Warpage		± 0.75mm
Water Absorption	ISO 10545 - 3	< 0.5%
Modulus of Rupture / Bending Strength	ISO 10545 - 4	> 35 N/mm ²
Breaking Strength		> 1300N
Resistance to Surface Abrasion	ISO 10545 - 7	Class 4
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	5.9 x 10-6 °C-1
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	GA
Chemical Resistance (Low Concentration)		GLA
Fire Resistance	-	A1/A1 _{FL}
Slip Resistance (Wet)	ANSI A326.3	DCOF 0.72
LEED	-	Yes
Recycled Content	-	37%
VOC Emissions	-	Zero VOC
Environmental Product Declaration	-	Industry Wide
Health Product Declaration	-	Available
 This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

- Product Info:**

 - Glazed Porcelain Tile
 - Matte Finish
 - 8.5mm Thickness
 - Pressed Edge
 - V3 - Moderate Variation
 - Frost Resistant



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

