

MONTERREY



For the most up-to-date product information, scan the QR code.

3/5"x 14" Liner in Riviera | Arizona
3"x 14" Wall Tile in Riviera | Arizona



3"x 14" Wall Tile in Noronha | Sardenha | Riviera



3/5"x 14" Liner in Bora Bora
3"x 14" Wall Tile in Bora Bora

AVAILABLE SPECIAL ORDER ITEMS:

8mm Wall Tiles - Pressed Edge			
SIZE	FINISH		COLORS
3"x 14"	Natural		Noronha Sardenha Arizona Riviera Jalapao Serido Mandacaru Bora Bora
14.7mm Trim Piece - Pressed Edge			
SIZE	TYPE	FINISH	COLORS
3/5"x 14"	Liner	Natural	Noronha Sardenha Arizona Riviera Jalapao Serido Mandacaru Bora Bora

All Sizes are Nominal.



3/5" x 14" Liner in Mandacaru | Riviera
3"x 14" Wall Tile in Mandacaru | Riviera

COLORS:



Noronha



Sardenha




Serido



Jalapao




Riviera

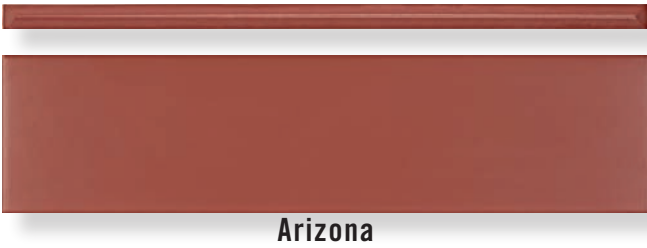

Arizona



Mandacaru

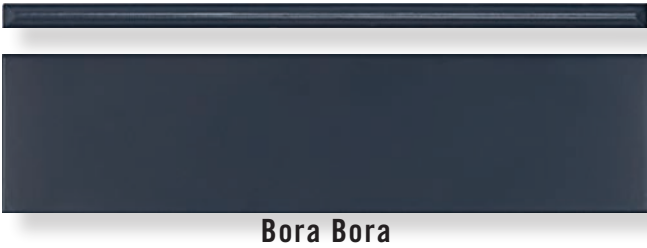

Bora Bora

Colors shown may vary from actual product. Final selection should be made from actual product samples.
Products and availability are subject to change, please refer to our website for the most up to date selection.



3/5”x 14” Liner in Serido
3”x 14” Wall Tile in Serido

Features	Test Method	Value
Water Absorption	ISO 10545 - 3	≤ 3%
Modulus of Rupture / Bending Strength	ISO 10545 - 4	35 N/mm ²
Breaking Strength		1100N
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	A
Chemical Resistance (Low Concentration)		LB
Fire Resistance	-	A1/A1 _{FL}
Slip Resistance (Wet)	ANSI A326.3	DCOF 0.43
LEED	-	Yes
Recycled Material	-	7%
VOC Emissions	-	Zero VOC
 This product will contribute to USGBC registered LEED projects. It will also contricute to the ANSI approved NAHB Green Building Standard ICC 700.		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8” wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16” wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Installation Tip: To create a natural, random-look installation, install the tiles in a vertical stack pattern. Stagger the trim pieces every 4 to 6 tiles, and offset them in each row for a varied appearance. When calculating material quantities, allocate approximately 4% of the total square footage for trim pieces. *(18 liners equals one square foot)*

Product Info:

- Vitrified Ceramic Tile
- Natural Finish
- 8mm | 14.7mm Thicknesses
- Pressed Edge
- V1 - Uniform Appearance
- Frost Resistance = No
- Application = Interior Wall and Light Residential Floor Use Only



