

24"x48" Field Tile in Statuary White

# **AVAILABLE IN:**

# 8.7mm Field Tiles

Rectified Edge

24"x48" Satin/Matte Finish 30"x30" Satin/Matte Finish

## 8.7mm Field Tile

Pressed Edge

12"x24" Satin/Matte Finish

## Mosaics

2"x2" Mosaic Satin/Matte Finish

#### Trim Pieces

3"x24" Bullnose Satin/Matte Finish 3"x12" Bullnose Satin/Matte Finish 0.6"x12" Ceramic Quartino Matte Finish




# MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
	a smaller size in any length and width combination with a 1" minimum.	BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" <sup>5</sup> / <sub>8</sub> "x4"
Diamond	4"	0074	CONC	V V V	
( ) Hexagon	6"	OCTAGONS		HEXAGONS	
Chevron	2"×12" 6"×24"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 <sup>1</sup> / <sub>2</sub> " w/ <sup>5</sup> / <sub>8</sub> " Dot		1"x1" 2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> " 3"x3"		1"x2" 1"x4"

<sup>\*</sup>Other sizes available upon request

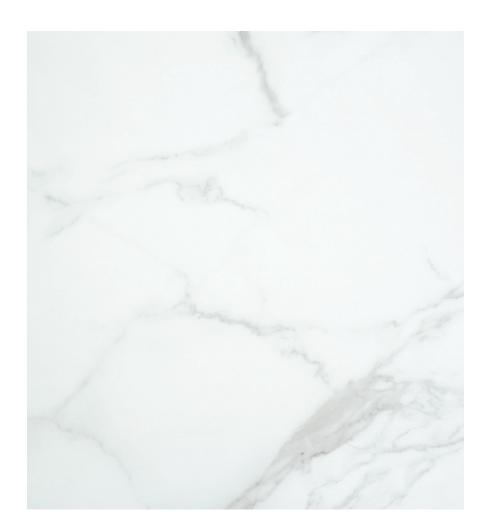

Statuary White

# 2"X2" MOSAIC



<sup>-</sup> All sizes are NOMINAL





# **NUVOLA**Glazed Porcelain Tile

Features	Test Method	Val	Value	
Water Absorption	ISO 10545-3	< 0.5%		
Breaking Strength	ISO 10545-4	> 1300 N		
Bending Strength	ISO 10545-4	> 35 N/mm²		
Abrasion Resistance	ISO 10545-7	4		
Cracking Resistance	ISO 10545-11	Resistant		
Frost Resistance	ISO 10545-12	Resistant		
Chemical Resistance	ISO 10545-13	Houshold	Acid/Alkaline Resistance	
		Minimum GB	GHA	
Stain Resistance	ISO 10545-14	Minimum Class 3		
Slip Resistance	D.C.O.F.	0.33		
Hardness (MOHS)	EN 101	Minimum 3		
	Zero VOCs			

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

#### **Product Info:**

- Glazed Porcelain Tile
- Satin/Matte Finish
- 8.7mm Thickness
- Rectified | Pressed Edge
- PEI Rating = 4
- V2 Slight Shading Variation
- Frost Resistance = Yes

#### **Product Info for Quartino:**

- Ceramic Tile
- Matte Finish
- V2 Slight Shading Variation
- Frost Resistance = No



www.genrose.com



www.genrose.com