

# OZARK



For the most up-to-date product information, scan the QR code.

24" x 24" Paver in Erie



12" x 12" Paver in Blue Penn  
 12" x 24" Paver in Blue Penn  
 24" x 24" Paver in Blue Penn



24" x 24" Paver in Butler



24" x 24" Paver in Chester



24" x 24" Paver in Grey Penn



24" x 24" Paver in Grey Hershey

SPECIAL ORDER ITEMS:

| 20mm Paver - Rectified Edge |           |                                                                       |
|-----------------------------|-----------|-----------------------------------------------------------------------|
| SIZE                        | FINISH    | COLORS                                                                |
| 12" x 12"                   | Anti-Slip | Blue Penn   Grey Penn                                                 |
| 12" x 24"                   |           |                                                                       |
| 24" x 24"                   | Anti-Slip | Blue Penn   Grey Penn   Lancaster   Erie   Hershey   Butler   Chester |

All Sizes are Nominal.



24" x 24" Paver in Butler


COLORS:



Butler



Chester

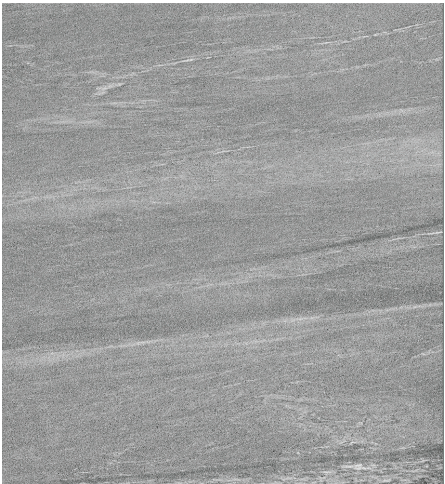

Hershey



Erie



Grey Penn



Lancaster



Blue Penn

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



12" x 12" Paver in Blue Penn  
12" x 24" Paver in Blue Penn  
24" x 24" Paver in Blue Penn



GENROSE

OZARK  
Porcelain Paver

| Features                                 | Test Method | Value                                     |
|------------------------------------------|-------------|-------------------------------------------|
| Dimensions                               | ASTM C499   | Compliant                                 |
| Surface Quality                          |             | Min. 95% of tiles free of visible defects |
| Warpage                                  | ASTM C485   | Compliant                                 |
| Wedging                                  | ASTM C502   | Compliant                                 |
| Water Absorption                         | ASTM C373   | < 0.5%                                    |
| Breaking Strength                        | ASTM C648   | ≥ 3000 lbs                                |
| Surface Hardness (Mohs)                  | ASTM C648   | 6                                         |
| Thermal Shock Resistance                 | ASTM C1026  | Compliant                                 |
| Crazing Resistance                       |             | Compliant                                 |
| Chemical Resistance (Domestic)           | ASTM C650   | Compliant                                 |
| Chemical Resistance (Low Concentration)  |             |                                           |
| Chemical Resistance (High Concentration) |             |                                           |
| Slip Resistance (Wet)                    | ANSI A326.3 | DCOF ≥ 0.7                                |
| Recycled Content                         | -           | 5%                                        |
| Health Product Declaration               | -           | Certificate Available                     |
| Enviorment Product Declaration           | -           | Yes                                       |
| Declare                                  | -           | Red List Free                             |
| LEED                                     | -           | Yes                                       |
| VOC Emissions                            | -           | Zero VOC                                  |



Declare.

This product will contricute to USGBC registered LEED projects.  
It will also contricute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.



**Disclaimer:** DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

- Product Info:**
  - Porcelain Paver
  - Anti-Slip Finish
  - 20mm Thickness
- Rectified Edge
  - V2 - Slight Variation
  - V3 - Moderate Variation (Pennsylvania Blue only)
  - Frost Resistant



[www.genrose.com](http://www.genrose.com)

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

