

PALLADIANA



For the most up-to-date product information, scan the QR code.

24" x 48" Floor/Wall Tile in White



24" x 48" Floor/Wall Tile in Green



24" x 48" Floor/Wall Tile in Brown



24" x 48" Floor/Wall Tile in Light Grey
24" x 48" Floor/Wall Tile in Dark Grey



24" x 48" Floor/Wall Tile in Black



24" x 48" Floor/Wall Tile in Sand

AVAILABLE STOCKED ITEMS:

8mm Floor/Wall Tiles - Rectified Edge		
SIZE	FINISH	COLORS
12" x 24"	Semi-Polished	White Linen Light Grey Sand Green Blue Black

SPECIAL ORDER ITEMS:

8mm Floor/Wall Tiles - Rectified Edge			
SIZE	FINISH	COLORS	
12" x 24"	Structured	White Linen Light Grey Dark Grey Sand Green Blue Brown Black	
	Semi-Polished	Brown Dark Grey	
24" x 24"	Structured Semi-Polished	White Linen Light Grey Dark Grey Sand Green Blue Brown Black	
24" x 48"		White Linen Light Grey Dark Grey Sand Green Blue Brown Black	

8mm Trim Pieces - Rectified Edge			
SIZE	TYPE	FINISH	COLORS
4" x 24"	Bullnose	Structured Semi-Polished	White Linen Light Grey Dark Grey Sand Green Blue Brown Black

All Sizes are Nominal.



24" x 48" Floor/Wall Tile in Dark Grey

COLORS:



White



Sand



Linen




Light Grey




Dark Grey



Brown

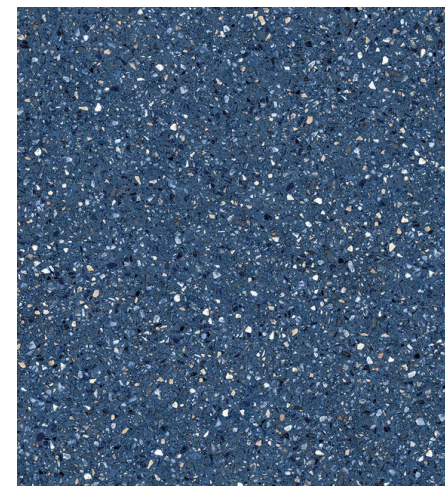

Blue

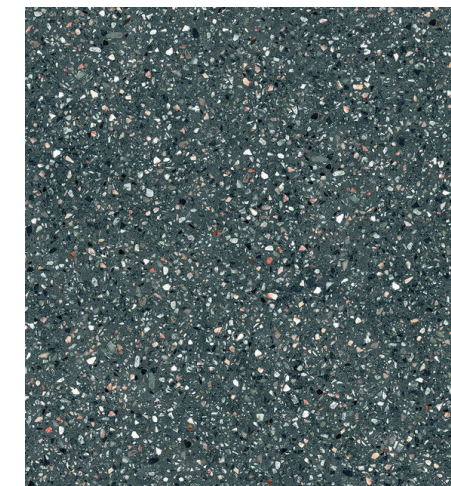

Green



Black

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.



Features	Test Method	Value	
Dimensions	ASTM C499	Compliant	
Surface Quality		Min. 95% of tiles free of visible defects	
Warpage	ASTM C485	± 0.40%	
Wedging	ASTM C502	± 0.25%	
Water Absorption	ASTM C373	≤ 0.5%	
Breaking Strength	ASTM C648	≥ 275 lbf	
Thermal Shock Resistance	ASTM C484	Resistant	
Crazing Resistance	ASTM C424	Resistant	
Chemical Resistance (Domestic)	ASTM C650	Not Affected	
Chemical Resistance (Low Concentration)			
Chemical Resistance (High Concentration)			
Visible Abrasion Resistance	ASTM C1027 - 19	Blue, Black, Green	Other Colors
		Class III	Class IV
Fire Resistance	-	A1/A1 _{FL}	
Slip Resistance (Wet)	ANSI A326.3	Semi-Polished	Structured
		Does Not Pass	DCOF 0.47
LEED	-	Yes	
Recycled Content	-	≥ 40%	
Green Squared	-	Yes	
Greenguard	-	Greenguard Gold Certificate Available	
Declare	-	Red List Free	
VOC Emissions	-	Zero VOC	






Declare. This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glazed Porcelain Tile
- 8mm Thickness
- Semi-Polished | Structured Finishes
- Rectified Edge
- PEI Rating: 3,4 (Varies By Color)
- V2 - Moderate Variation
- Frost Resistant



www.genrose.com

24" x 48" Floor/Wall Tile in Brown

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com