

PASSAGE

 **GENROSE**





24"x24" Field Tile in Silver



4"x12" | 12"x24" Field Tile in Dover

AVAILABLE IN:

10.5mm Field Tiles

Rectified Edge

4"x12" Natural Finish

12"x24" Natural Finish


24"x24" Natural Finish

Mosaic

2"x2" Mosaic Natural Finish

Trim Piece

3.75"x24" Bullnose Natural Finish










- All sizes are NOMINAL

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8"x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 3/8"x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2"x12"		1"x2" 2"x4" 5/8"x4"
	Diamond 4"			HEXAGONS	
	Hexagon 6"	OCTAGONS			1 1/8" 2"
	Chevron 2"x12" 6"x24"		2" w/ 0.6" Squares		
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 1/2" w/ 5/8" Dot		1"x1" 1 3/8"x1 3/8" 2"x2" 3"x3"		1"x2" 1"x4"

*Other sizes available upon request



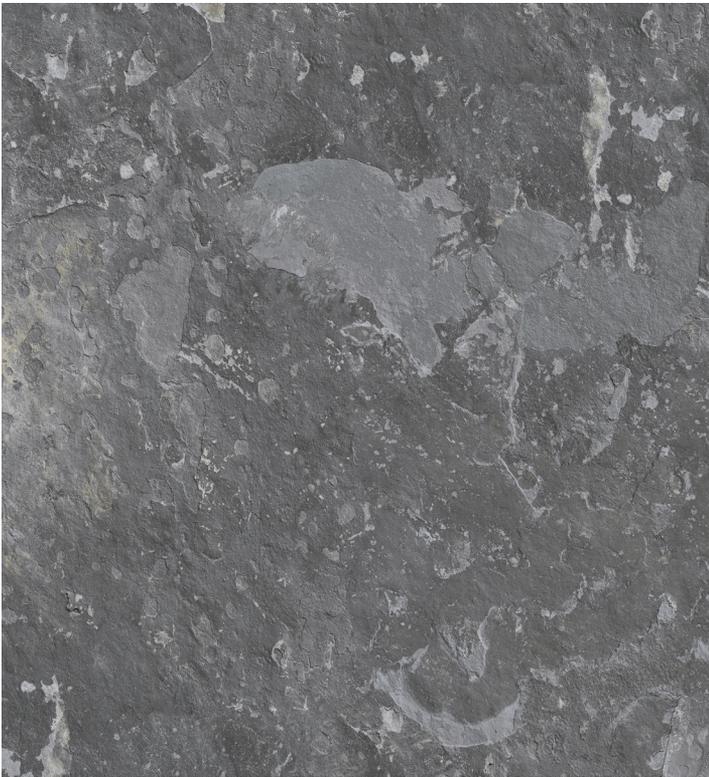
Dover

V3 




Silver

V3 



Vermont

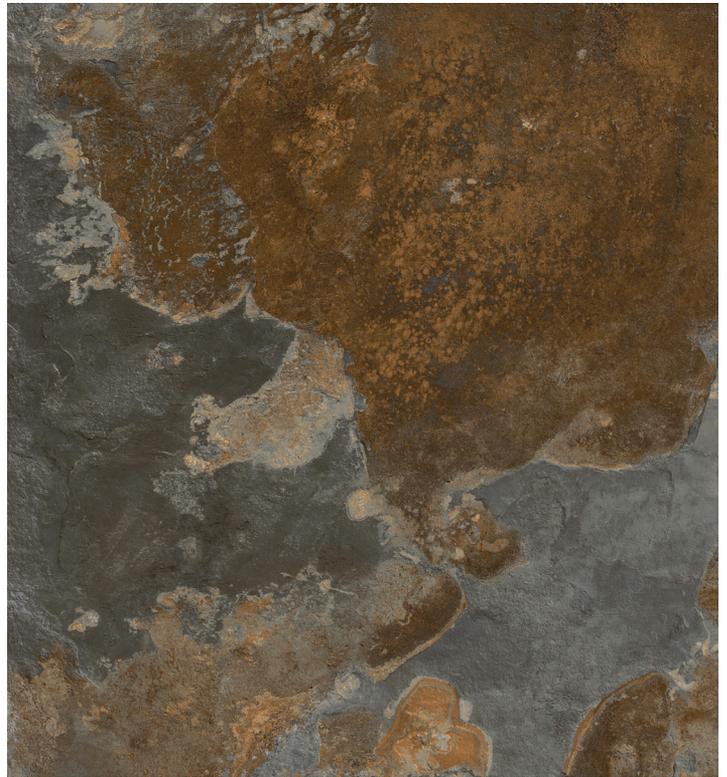V3 



Rajah

V4 

Colors shown may vary from actual product. Final selection should be made from actual product samples.

2"X2" MOSAIC



Dover



Silver



Vermont



Rajah



12"x24" Field Tile in Rajah

Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.3%
Thickness		± 4%
Straightness of Edges		± 0.3%
Orthogonality		± 0.3%
Planarity		± 0.3%
Water Absorption	ISO 10545-3	≤ 0.05%
Breaking Modulus	ISO 10545-4	Min. 35 N/mm ²
Modulus of Rupture		Thickness ≥ 7.5 mm: Min. 1300 N Thickness < 7.5 mm: Min. 700 N
Thermal Expansion Coefficient	ISO 10545-8	≤ 7x10 ⁻⁶ °C ⁻¹
Thermal Shock Resistance	ISO 10545-9	Resistant
Crazing Resistance	ISO 10545-11	Resistant
Frost Resistance	ISO 10545-12	
Chemical Resistance	ISO 10545-13	Min. GB
Household Chemicals and Swimming Pool Water Cleaners		From GLA, GLB to GLC
Acids and Low Concentration Alkalis		
Stain Resistance	ISO 10545-14	Min. 3
Color Stability to Light	DIN 51094	They do not have to show visible color alteration
Friction Coefficient	ANSI A 137.1:2012	≥ 0.42

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Natural Finish
- 10.5mm Thickness
- Rectified Edge
- V3 - Moderate Variation (Dover, Silver and Vermont)
- V4 - **EXTREME** Variation (Rajah)
- Frost Resistance = Yes





www.genrose.com