



Shown From the Left Panel to Right Panel and Top to Bottom:



Mud in Matte



Shadow in Matte



Copper in Matte



Stone in Matte




48"x48" Field Tile in Copper



24"x24" Field Tile in Mud  
4"x24" Field Tile in Stone | Mud | Copper | Shadow



24"x24" Field Tile in Mud  
4"x24" Field Tile in Copper

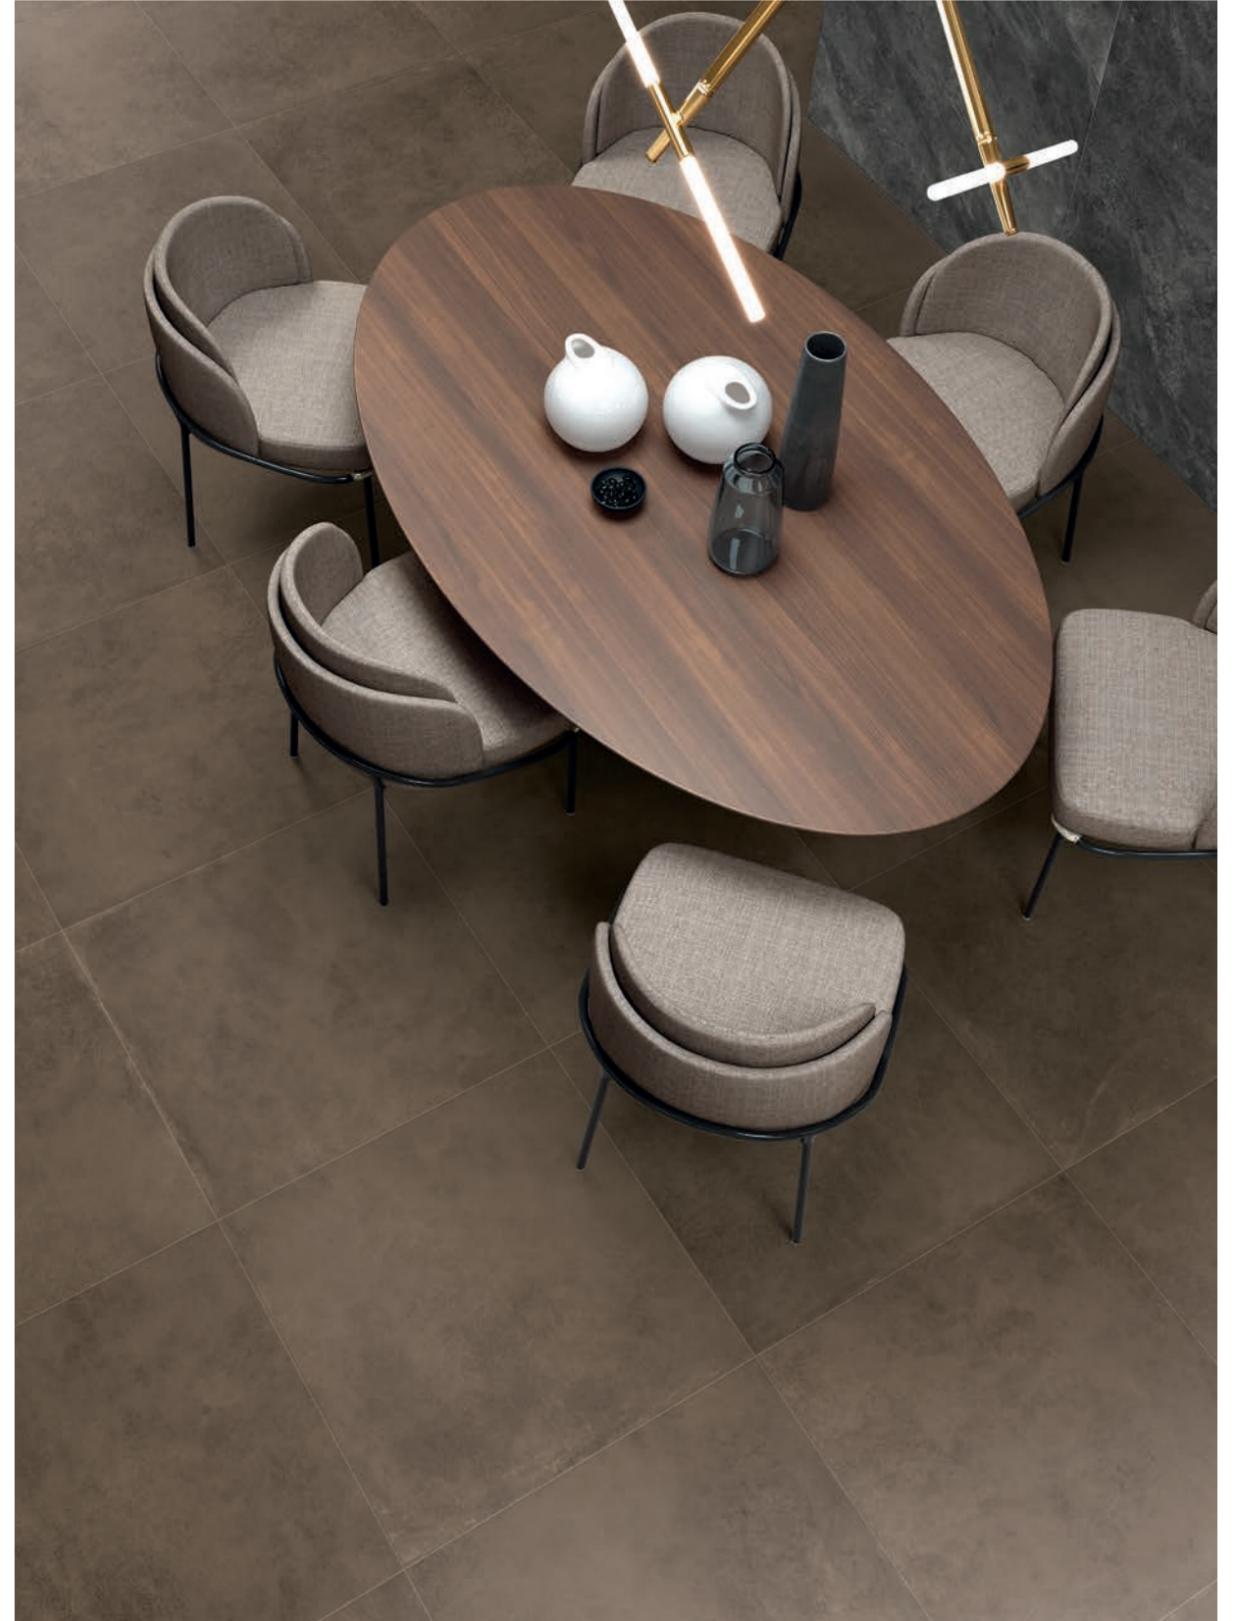

32"x32" Field Tile in Copper



48"x48" Field Tile in Mud



48"x48" Field Tile in Stone

# AVAILABLE IN:


## 9mm Field Tiles

Rectified Edge

- 48"x48" Matte | Polished Finish
- 12"x48" Matte Finish
- 32"x32" Matte Finish
- 24"x24" Matte | Polished Finish
- 4"x24" Matte Finish

## Trim Pieces

- 2"x48" Bullnose Polished Finish
- 2"x32" Bullnose Matte Finish
- 2"x24" Bullnose Matte | Polished Finish
- 13"x48" Step Matte | Polished Finish
- 13"x48" Left | Right Corner Step Matte | Polished Finish
- 16"x48" Jolly Step Matte | Polished Finish

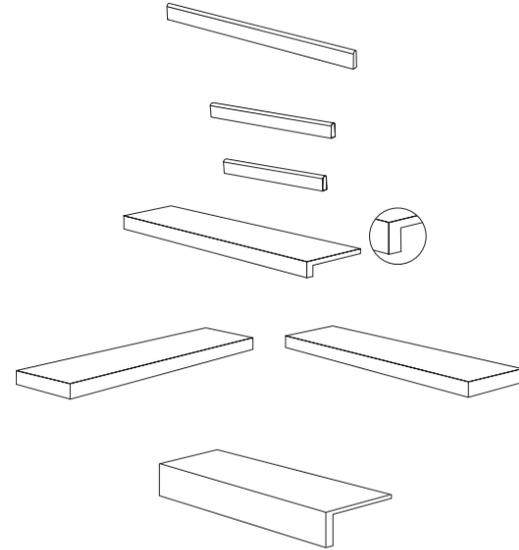

- All sizes are NOMINAL

# MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.  
We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8" x 3" 2" x 4"
		BRICKS		DIAMONDS	
			1" x 2" 1" x 3" 1 3/8" x 3" 2" x 4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2" x 12"		1" x 2" 2" x 4" 5/8" x 4"
	Diamond 4"	OCTAGONS		HEXAGONS	
	Hexagon 6"		2" w/ 0.6" Squares		1 1/8" 2"
	Chevron 2" x 12" 6" x 24"	SQUARES		RECTANGLES	
	TRAPEZOID W/ DOT 4" x 2 1/2" w/ 5/8" Dot		1" x 1" 1 3/8" x 1 3/8" 2" x 2" 3" x 3"		1" x 2" 1" x 4"

\*Other sizes available upon request




Shadow



Copper



Stone

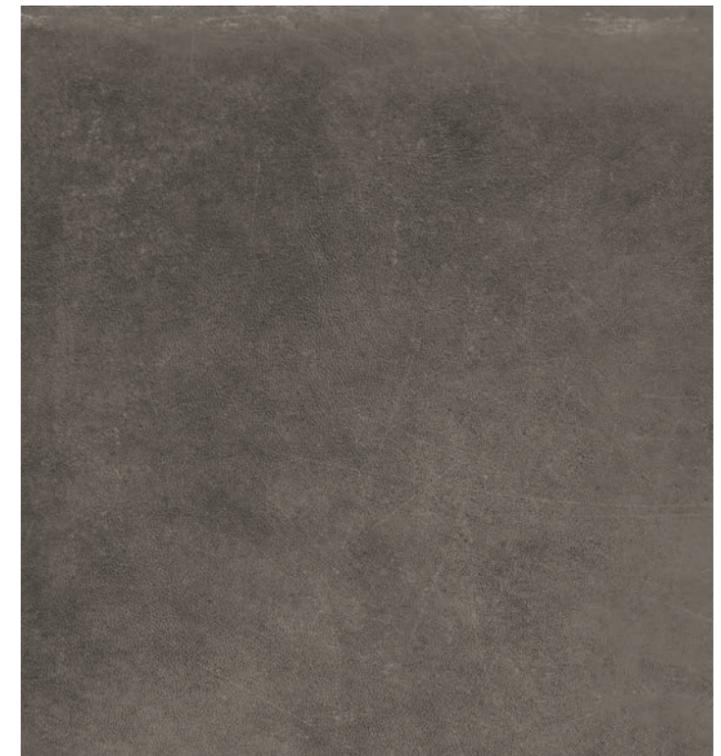

Mud

Colors shown may vary from actual product. Final selection should be made from actual product samples.



Features	Test Method	Value
Length and Width of the Average-Sizes Tiles	ISO 10545-2	± 0.5%
Thickness	ISO 10545-2	± 5%
Warpage of Edges	ISO 10545-2	± 0.5%
Wedging	ISO 10545-2	± 0.6%
Flatness	ISO 10545-2	± 0.5%
Water Absorption	ISO 10545-3	E ≤ 0.5%
Bending Strength	ISO 10545-4	9 mm: ≥ 45 N/mm <sup>2</sup>
Breaking Strength	ISO 10545-4	< 7.5 mm: ≥ 700 N ≥ 7.5 mm: ≥ 1300 N
Abrasion Resistance	ISO 10545-7	5 (Stone) 4 (Copper   Mud) 3 (Shadow)
Thermal Shock Resistance	ISO 10545-9	Resists
Frost Resistance	ISO 10545-12	Resists
Chemical Resistance	ISO 10545-13	GB
Stain Resistance	ISO 10545-14	GL ≥ Min. Class 3
Slip Resistance	ANSI A137-1:2012	> 0.42
Recycled Material	-	≥40%
This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Color Body Porcelain Tile
- Matte | Polished Finishes
- 9mm Thicknesses
- Rectified Edge
- PEI Rating = 5 (Stone)  
4 (Copper | Mud)  
3 (Shadow)
- V2 - Slight Shading Variation
- Frost Resistance = Yes





[www.genrose.com](http://www.genrose.com)