PLANE









12¹/4″x12¹/4″ Random Mosaic in Cloudburst 24″x24″ Field Tile in Cloudburst

24"x24" Field Tile in Sandshell





24"x48" Field Tile in Sharkskin





12"x24" Field Tile in Moonbeam 12"x24" Field Tile in Atmosphere 24"x24" Field Tile in Atmosphere

24"x48" Field Tile in Moonbeam

AVAILABLE IN:

9mm Field Tile

24"x48" Matte | Structured Finish 24"x24" Matte | Structured Finish 12"x24" Matte | Structured Finish 6″x24″ Matte Finish

Mosaics

12"x24" Sheet 2"x2"

Layer Mosaic Matte Finish 12¹/₄"x12¹/₄" Sheet Random Mosaic Matte Finish Mosaic Matte Finish

20mm Paver

24"x48" Structured Finish

Trim Pieces

13¹/₅″x48″	Nosing Matte Finish
12″x48″	Step Matte Finish
13¹/₅″x24″	Nosing Matte Finish
12"x24"	Step Matte Finish
12″x24″	Stairtread Matte Finish
2 ⁷ / ₈ "x24"	Baseboard Matte Finish
13 ¹ / ₅ "x13 ¹ / ₅ "	Nosing Corner Matte Finish

- All sizes are nominal



MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD	TILES	CUBES BASKETWEAVE		CUBES		
	Any 24″ field tile can be cut down to		2" 4"		1 ³ / ₈ "x3" 2"x4"	
	a smaller size in any length and width combination with a 1" minimum.	BRICKS		DIAMONDS		
			1"x2" 1"x3" 1 ³ /8"x3" 2"x4"		2"	
FIELD S	SHAPES*	CHEVRONS		HERRINGBONE		
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" ⁵ /8"x4"	
Diamond	4"					
			OCTAGONS		HEXAGONS	
Chevron	6" 2"x12" 6"x24"		2" w/ 0.6" Squares		1 ¹ /8" 2"	
TRAPEZO	ID W/ DOT	SQU/	ARES	RECTA	NGLES	
	4"x2 ¹ /2" w/ ⁵ /8" Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1"x2" 1"x4"	

*Other sizes available upon request



Moonbeam



Sandshell



Sharkskin




Atmosphere




Cloudburst



2"X2" MOSAIC

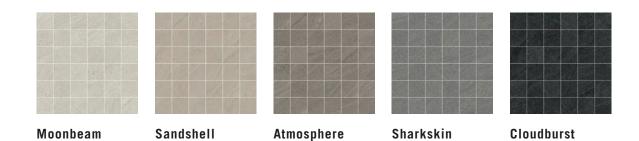

RANDOM MOSAIC









Moonbeam

Sandshell

Atmosphere

Sharkskin C

Cloudburst

LAYER MOSAIC



Moonbeam



Sandshell



Atmosphere



Sharkskin



Cloudburst



Features	Test Method	Va	Value		
Sides	ISO 10545-2	± 0.3% MAX (± 1.0 mm MAX)			
Thickness	ISO 10545-2		± 5.0% MAX (± 0.5 mm MAX)		
Straightness of Sides	ISO 10545-2	± 0.3% MAX (± 0.8 mm MAX)			
Rectangularity	ISO 10545-2	± 0.3% MAX (± 1.5 mm MAX)			
Surface Flatness	ISO 10545-2	± 0.4% MAX (± 1.8 mm MAX)			
Water Absorption	ISO 10545-3	≤ 0.1%			
Flexion Resistance	ISO 10545-4	9 mm: S ≥ 2400N R ≥ 48 N/mm²			
Impact Resistance	ISO 10545-5	0.48			
Resistance to Abrasion	ISO 10545-6	< 150 mm ³			
Coefficient of Linear Thermal Shocks	ISO 10545-8	α=6,6x10 ^{-6°} C ⁻¹			
Thermal Shock Resistance	ISO 10545-9	Resistant			
Frost Resistance	ISO 10545-12	Resistant			
Resistance of Chemical Attack	ISO 10545-13	A LA HA			
Stain Resistance	ISO 10545-14	5			
Lead and Cadmium Discharge	ISO 10545-15	< Than Instrument Limit			
Skid Resistance		Matte	Structured		
	ASTM C1028	> 0,60	> 0,60		
	ANSI A137.1	> 0,42	> 0,42		
	DIN 51130	R10	R11		
	DIN 51097	_	A+B+C		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Color Body Porcelain Tile
- Matte | Structured Finishes
- 9mm | 20mm Thicknesses
- Rectified Edge
- V2 Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com