
POMPANO







For the most up-to-date product information, scan the QR code.

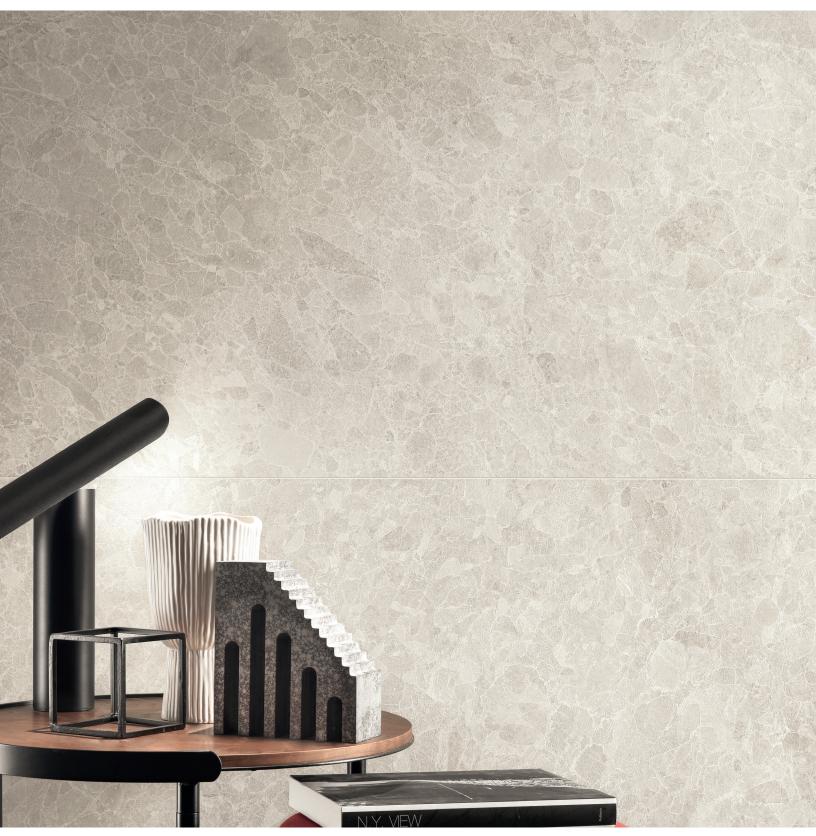



24" x 48" Field Tile in Pure | Fog 48" x 48" Field Tile in Pure

AVAILABLE STOCKED ITEMS:

9mm Floor/Wall T	Tiles - Rectified Edge	е		
SIZE	FINISH		COLORS	
4" x 12"	Natural		Pure Rope Fog	
24" x 24"	Natural		Pure Rope Fog	
9mm Floor/Wall N	Mosaic - Rectified E	dge		
SHEET SIZE	TYPE	FINISH	COLORS	
12" x 12"	2" x 2" Mosaic	Natural	Pure Rope Fog	

SPECIAL ORDER ITEMS:

9mm Floor/Wall Ti	les - Rectified Edge				
SIZE	FINISH	COLORS			
4" x 12"	Natural	Ocean Grey Fossil			
12" x 24"	Natural	Pure Rope Ocean Grey Fossil Fog			
24" x 24"	Natural	Ocean Grey Fossil			
24" x 48"	Natural	Pure Rope Ocean Grey Fossil Fog			
	Semi-Polished	Pure Rope Ocean Grey			
48" x 48"	Natural	Pure Rope Ocean Grey			
20mm Outdoor Pavers - Rectified Edge					
SIZE	FINISH	COLORS			
24" x 24"	Anti-Slip	Pure Rope Fossil			

All Sizes are Nominal.



MADE TO ORDER FIELD TILES AND MOSAICS: Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE		
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 ³ / ₈ "x3" 2"x4"	
		BRICKS		DIAMONDS		
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"	
FIELD SHAPES*		CHEVRONS		HERRINGBONE		
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"	
Diamond	4"			* \$ \$ \$	⁵ / ₈ "x4"	
		OCTAGONS		HEXAGONS		
Hexagon	6"		2"		1 ¹ /8"	
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		2"	
TRAPEZOID W/ DOT		SQUARES		RECTANGLES		

1"x1"

1³/₈"x1³/₈" 3"x3"

2"x2"

1"x2"

1"x4"

4"x21/2"

w/ ⁵/₈" Dot



24" x 48" Field Tile in Pure | Fog 48" x 48" Field Tile in Pure | Fog

^{*}Other sizes available upon request. All sizes are nominal.

COLORS:







Pure

Rope

Ocean Grey






Fossil

Fog

2" x 2" MOSAIC:







Pure

Rope

V2



POMPANO Glazed Porcelain Tile

			•	Jiazed Porceiain Tile
Features	Test Method	Value		
Dimensions	100 10545 2	Compliant		
Surface Quality	ISO 10545 - 2	Min. 95% of tiles free of visible defects		
Water Absorption	ISO 10545 - 3	≤ 0.1%		
Modulus of Rupture / Bending Strength	ISO 10545 - 4	9mm R ≥ 45 N/m	um²	20mm R ≥ 50 N/mm ²
Breaking Strength				S ≥ 12,500 N
Deep Abrasion Resistance	ISO 10545 - 6	≤ 150 mm ³		
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	< 7.1 x 10 ⁻⁶ °C ⁻¹		
Thermal Shock Resistance	ISO 10545 - 9	Resistant		
Crazing Resistance	ISO 10545 - 11	Resistant		
Chemical Resistance (Domestic)	ISO 10545 - 13	А		
Chemical Resistance (Low Concentration)		LA		
Chemical Resistance (High Concentration)		НА		
Fire Resistance	-	A1/A1 _{FL}		
Slip Resistance (Wet)	ANSI A326.3	Semi-Polished DCOF 0.56	Natural DCOF 0.72	Pavers DCOF 0.90
LEED	-	Yes		
Recycled Content	-	> 30%		
VOC Emissions	-	Zero VOC		
Declare	-	Red List Free		
Environmental Product Declaration	-	Industry-Wide		
Health Product Declaration	-	Available		
• •	1			







This product will contribute to USGBC registered LEED projects. It will also contricute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glazed Porcelain Tile
- Natural | Semi-Polished Finishes
- 9mm | 20mm Thicknesses
- Rectified Edge
- PEI Rating = 4
- Frost Resistance = Yes



www.genrose.com



www.genrose.com