PROMENADE









6"x48" Field Tile in Yellow









3"x48" Field Tile in Black

AVAILABLE IN:


Field Tile

6"x48" Matte Finish 3"x48" Matte Finish 3"x24" Matte Finish

Trim Pieces

3"x48" Skirting Matte Finish

- All sizes are nominal
- In the 3"x24" size tiles, the pattern runs parallel to the 3" side,
- In the 3"x48" and 6"x48" size tiles, the pattern runs parallel to the 48" side

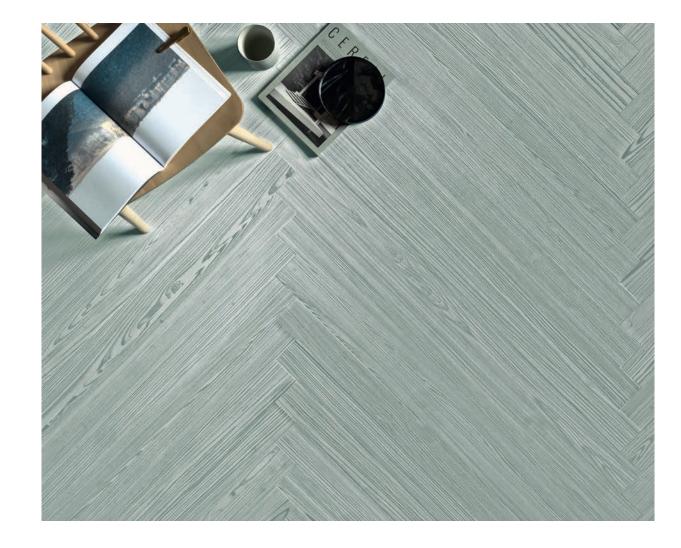









Yellow



Black



Green



Blue



White





PROMENADEColor Body Porcelain Tile

Features	Test Methods	Required Value	Our Value
Length and Width	ISO 10545-2	± 0.6% / ± 2 mm	± 0.6% / ± 2 mm
Thickness	ISO 10545-2	± 5%	± 5%
Warpage of Edges	ISO 10545-2	± 0.5%	± 0.5%
Wedging	ISO 10545-2	± 0.6%	± 0.6%
Warpage	ISO 10545-2	± 0.5%	± 0.5%
Water Absorption	ISO 10545-3	<0.5%	0.3%
Resistance to Thermal Shock	ISO 10545-9	Must not produce noticeable alteration to surface	Guaranteed
Frost Resistance	ISO 10545-12	Must not produce noticeable alteration to surface	Guaranteed
Chemical Resistance	ISO 10545-13	Must not produce noticeable alteration to surface	A LA HA
Breaking Strength	ISO 10545-4	≥ 35 N/mm²	42 N/mm²
Resistance to Abrasion	ISO 10545-7		PEI 5
Stain Resistance	ISO 10545-14	≥Class 3	4
Anti-Slip	DIN 51130		R9
Dynamic Coefficient of Friction	DCOF	>0.42	0.42

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide.

Product Info:

- Color Body Porcelain Tile
- Matte Finish
- 9.5mm Thickness
- Rectified Edge
- PEI Rating = 5
- V1 Uniform Appearance
- Frost Resistance = Yes



www.genrose.com



www.genrose.com