

**REALIZE**

 **GENROSE**





24"x24" Field Tile in Carrara



12"x24" | 24"x24" Field Tile in Statuario Gold

## AVAILABLE IN:

### 9.5mm Field Tiles

Rectified Edge

4"x12" Matte | Polished Finish

12"x24" Matte | Polished Finish

24"x24" Matte | Polished Finish

### 9.5mm Field Tiles

Pressed Edge

12"x24" Matte Finish

### Mosaics

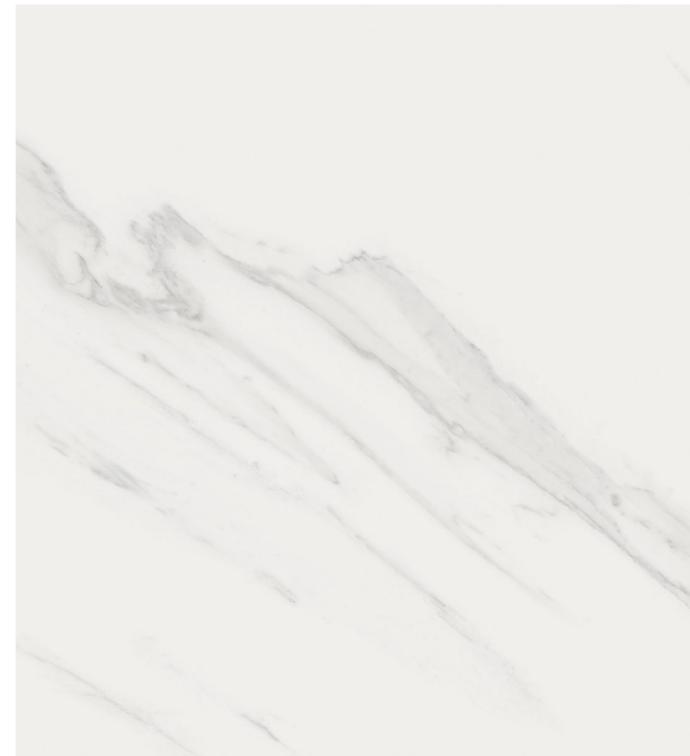
2"x2" Mosaic Matte Finish

5"x6" Hexagon Mosaic Matte Finish


- All sizes are NOMINAL

### Trim Pieces

3"x24" Bullnose Matte | Polished Finish



Carrara










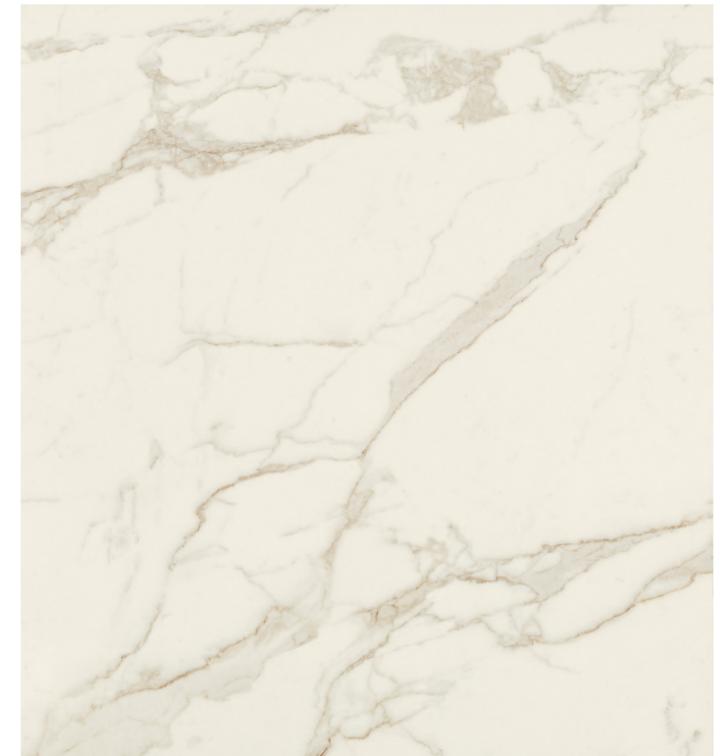


Statuario Gold

## MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"
			<b>BRICKS</b> 1"x2" 1"x3" 1 <sup>3</sup> / <sub>8</sub> "x3" 2"x4"		<b>DIAMONDS</b> 2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
 Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" 5 <sup>1</sup> / <sub>8</sub> "x4"
 Diamond	4"	OCTAGONS		HEXAGONS	
 Hexagon	6"		2" w/ 0.6" Squares		1 <sup>1</sup> / <sub>8</sub> " 2"
 Chevron	2"x12" 6"x24"	SQUARES		RECTANGLES	
 TRAPEZOID W/ DOT	4"x2 <sup>1</sup> / <sub>2</sub> " w/ 5 <sup>1</sup> / <sub>8</sub> " Dot		1"x1"    2"x2" 1 <sup>3</sup> / <sub>8</sub> "x1 <sup>3</sup> / <sub>8</sub> "    3"x3"		1"x2" 1"x4"

\*Other sizes available upon request

Colors shown may vary from actual product. Final selection should be made from actual product samples.

## 2"X2" MOSAIC



Carrara



Statuario Gold

## 5"X6" HEXAGON MOSAIC



Carrara



Statuario Gold



24"x24" Field Tile in Carrara

Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.6% (±2.00mm)
Thickness		± 5% (±0.5mm)
Warpage		± 0.5% (±1.5mm)
Wedging		± 0.5% (±2.00mm)
Flatness		± 0.5% (±2.00mm)
Water Absorption	ISO 10545-3	≤ 0.5%
Breaking Strength	ISO 10545-4	S>1300 N
Bending Strength	ISO 10545-4	R ≥ 35 N/mm <sup>2</sup>
Coefficient of Linear Thermal Expansion	ISO 10545-8	≈7 x 10 <sup>-6</sup> C <sup>-1</sup>
Thermal Shock Resistance	ISO 10545-9	Resistant
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance	ISO 10545-13	Resistant
Stain Resistance	ISO 10545-14	≥ Class 3
Color Resistance to Light	DIN 51094	No Alteration
Slip Resistance	ASTM C-1028	Dry/Wet >0.6

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Color Body Porcelain Tile
- Matte | Polished Finish
- 9.5mm Thickness
- Rectified | Pressed Edge
- Frost Resistance = Yes
- V4 - **EXTREME** Variation





[www.genrose.com](http://www.genrose.com)