

RIALTO



For the most up-to-date product information, scan the QR code.

24" x 24" Field Tile in Cloud



24" x 48" Field Tile in Fog



24" x 24" Field Tile in Storm








AVAILABLE SPECIAL ORDER:

8.5mm Floor/Wall Tiles - Rectified Edge			
SIZE	FINISH		COLORS
12" x 24"	Matte		Rainbow Fog Cloud Storm
24" x 24"	Matte		Rainbow Fog Cloud Storm
24" x 48"	Matte		Rainbow Fog Cloud Storm
8.5mm Trim - Rectified Edge			
SIZE	TYPE	FINISH	COLORS
3" x 24"	Bullnose	Matte	Rainbow Fog Cloud Storm
12" x 24	Stairtread	Matte	Rainbow Fog Cloud Storm

- All sizes are NOMINAL


MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.
We can cut any field tile to create a custom mosaic or field tile size as specified.


FIELD TILES		CUBES		BASKETWEAVE		
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8 "x3" 2"x4"	
FIELD SHAPES*		BRICKS		DIAMONDS		
			1"x2" 1"x3" 1 3/8"x3" 2"x4"		2"	
FIELD SHAPES*		CHEVRONS		HERRINGBONE		
	6.7" Base Half Hexagon		2"x12"		1"x2" 2"x4" 5/8"x4"	
	4" Diamond		OCTAGONS		HEXAGONS	
	6" Hexagon		2" w/ 0.6" Squares			1 1/8 " 2"
	2"x12" Chevron		TRAPEZOID W/ DOT			SQUARES
	4"x2.5" w/ 5/8" Dot		1"x1" 2"x2" 1 3/8"x1 3/8" 3"x3"		1"x2" 1"x4"	

*Other sizes available upon request

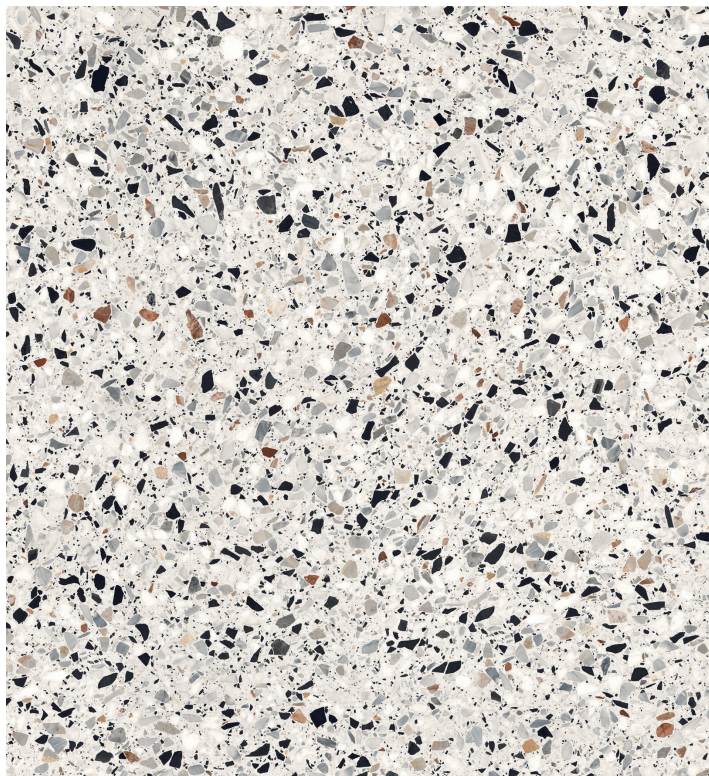COLORS:




Rainbow

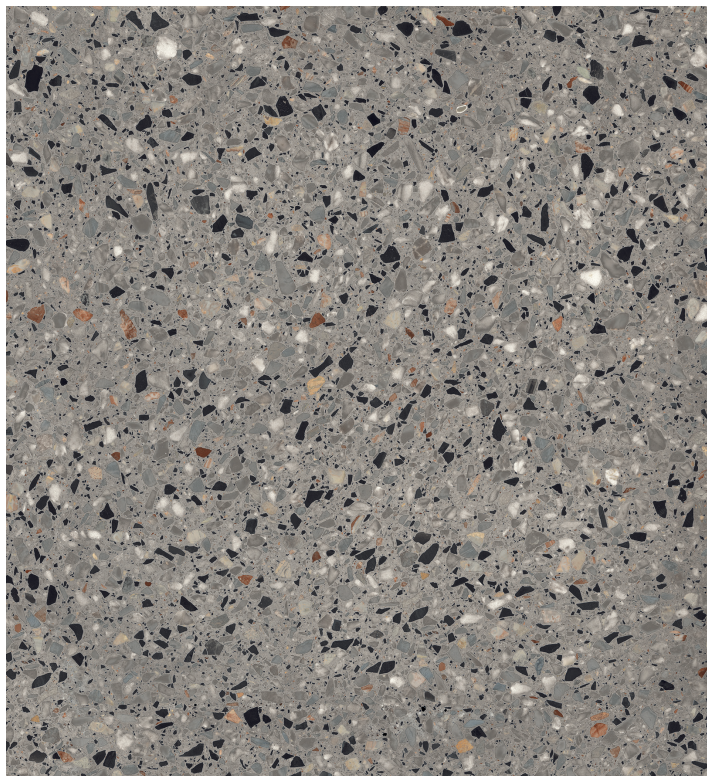

Fog



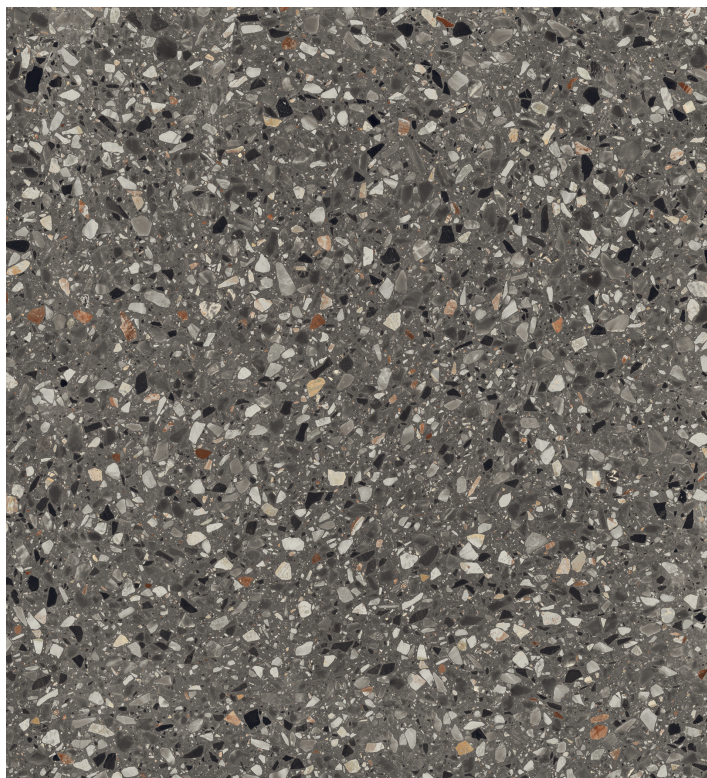Cloud



Storm

Colors shown may vary from actual product. Final selection should be made from actual product samples.
Products and availability are subject to change, please refer to our website for the most up to date selection.



24" x 48" Field Tile in Cloud

Features	Test Method	Value
Dimensions	ISO 10545 - 2	Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Water Absorption	ISO 10545 - 3	$\leq 0.1\%$
Modulus of Rupture / Bending Strength	ISO 10545 - 4	$\geq 45 \text{ N/mm}^2$
Breaking Strength		$S \geq 1300 \text{ N}$
Deep Abrasion Resistance	ISO 10545 - 6	$\leq 140 \text{ mm}^3$
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	$6.7 \times 10^{-6} \text{ }^\circ\text{C}^{-1}$
Thermal Shock Resistance	ISO 10545 - 9	Resistant
Crazing Resistance	ISO 10545 - 11	Resistant
Chemical Resistance (Domestic)	ISO 10545 - 13	A
Chemical Resistance (Low Concentration)		LA
Fire Resistance	-	A1/A1 _{FL}
Slip Resistance (Wet)	ANSI A326.3	DCOF 0.55
LEED	-	Yes
Recycled Content	-	20%
VOC Emissions	-	Zero VOC
Environmental Product Declaration	-	Industry-Wide
Health Product Declaration	-	Available



This product will contribute to USGBC registered LEED projects.
 It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Color Body Porcelain Tile
- Matte Finish
- 8.5 mm Thickness
- Rectified Edge
- V3 - Moderate Variation
- PEI Rating 5
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com