

ROXY



GENROSE





3"x9" Frame Wall Tile in Hematite
3"x9" Frame Wall Tile in Moonstone



3"x9" Bullnose in Hematite
3"x9" Frame Wall Tile in Moonstone

AVAILABLE IN:

Wall Tile *Glossy Finish*

- 3"x9"
- 3"x9" Frame

Mosaics + Special Shapes *Glossy Finish*

- 2.75"x10" Chevron
- 3"x9" Picket
- 1"x3" Curved Mosaic
- 1"x3" Brick Mosaic
- 13"x13" Sheet 2-Tone Mosaic

Trim Pieces *Glossy Finish*

- .7"x9" Quartino
- .78"x9" Pencil
- 2"x9" Bullnose

Wall Tile *Matte Finish in White Only*

- 3"x9"
- 3"x9" Frame

Mosaics + Special Shapes *Matte Finish in White Only*

- 2.75"x10" Chevron
- 3"x9" Picket
- 1"x3" Curved Mosaic
- 1"x3" Brick Mosaic

Trim Pieces *Matte Finish in White Only*


- .7"x9" Quartino




- All sizes are NOMINAL



3"x9" Wall Tile in Hematite
2-Tone Mosaic in Quartz and Hematite



Quartz

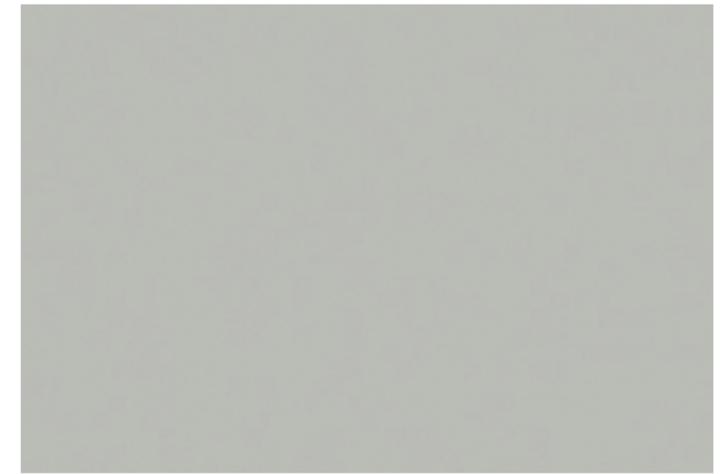


Moonstone




White



Hematite



Beryl

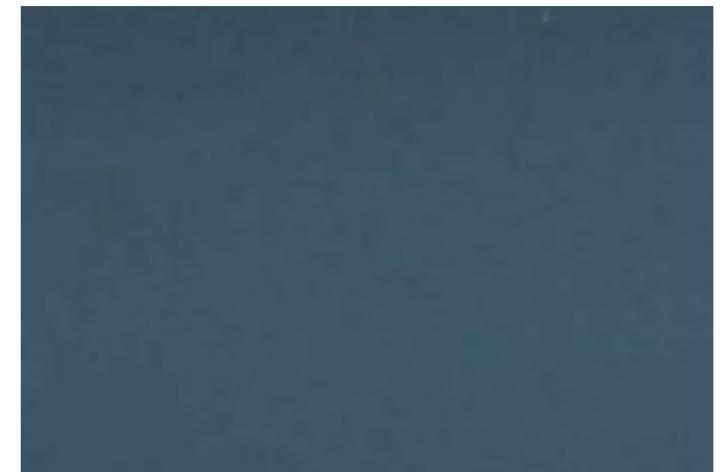

Zircon

Colors shown may vary from actual product. Final selection should be made from actual product samples.

1X3 CURVED MOSAIC



Zircon



Hematite



Moonstone



Beryl



Quartz




White


1X3 BRICK MOSAIC



Zircon




Hematite



Moonstone



Beryl



Quartz




White

2-TONE MOSAIC



Beryl and Moonstone



Quartz and Hematite

Features	Test Method	Value	
Dimensions	ISO 10545-2	Various	
		Length	Width
From Work Sizes	ISO 10545-2	0.00%. 0.0mm / 0.12%. 0.3mm	-0.12%. -0.1mm / 0.37%. 0.3mm
Straightness	ISO 10545-2	-0.04%. -0.1mm / 0.04%. 0.1mm	0.00%. 0.0mm / 0.00%. 0.0mm
Rectangularity	ISO 10545-2	-0.16%. -0.4mm / 0.16%. 0.4mm	-0.12%. -0.1mm / 0.12%. 0.1mm
Edge Curvature	ISO 10545-2	-0.20%. -0.5mm / 0.00%. 0.0mm	0.00%. 0.0mm / 0.00%. 0.0mm
Center Curvature	ISO 10545-2	-0.19%. -0.5mm / 0.00%. 0.0mm	
Warpage	ISO 10545-2	-0.04%. -0.1mm / 0.04%. 0.1mm	
Thickness	ISO 10545-2	0.00%. 0.0mm / 1.25%. 0.1mm	
Surface Quality	ISO 10545-2	100%	
Water Absorption	ISO 10545-3	E= 18.0% min 17.3%	
Breaking Strength	ISO 10545-4	860N	
Modulus Of Rupture	ISO 10545-4	e ≥ 7.5mm	
		Min=19 N/mm ² Media=21 N/mm ²	
Thermal Coefficient of Linear Expansion	ISO 10545-8	5.9 x 10 ⁻⁶ °K ⁻¹	
Thermal Shock Resistance	ISO 10545-9	Resistant	
Crazing Resistance	ISO 10545-11	Resistant	
Resistance of Chemical Attack	ISO 10545-13	Low Concentration	Domestic Chemicals
		GLA	GA
Stain Resistance	ISO 10545-14	Class 5	

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info:

- Ceramic Tile
- Matte | Glossy Finishes
- 8mm Thickness
- Pressed Edge
- V2 - Slight Shading Variation
- Frost Resistance = No





www.genrose.com