

**SONNET**

 **GENROSE**





8"x8" Field Tile in Fiore Di Bosco



8"x8" | 8"x16" | 16"x16" Field Tile in Corinthian

# AVAILABLE IN:

## 10mm Field Tiles








*Rectified Edge*

- 8" x 8" *Matte Finish*
- 8" x 16" *Matte Finish*
- 16" x 16" *Matte Finish*
- 16" x 24" *Matte Finish*
- 24" x 24" *Polished Finish*

- All sizes are NOMINAL

# MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.  
We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 3/8" x 3" 2" x 4"
		BRICKS		DIAMONDS	
			1" x 2" 1" x 3" 1 3/8" x 3" 2" x 4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
	Half Hexagon 6.7" Base		2" x 12"		1" x 2" 2" x 4" 5/8" x 4"
	Diamond 4"			HEXAGONS	
	Hexagon 6"	OCTAGONS			1 1/8" 2"
	Chevron 2" x 12" 6" x 24"		2" w/ 0.6" Squares		
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4" x 2 1/2" w/ 5/8" Dot		1" x 1" 1 3/8" x 1 3/8" 2" x 2" 3" x 3"		1" x 2" 1" x 4"

\*Other sizes available upon request



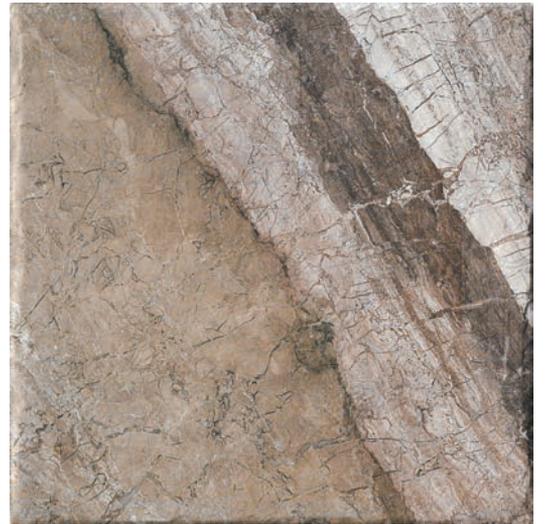
**Paonazzetto**



**Corinthian**



**Fiore Di Bosco**



**Cappuccino**



**Marquinia**

Colors shown may vary from actual product. Final selection should be made from actual product samples.



24"x24" Field Tile in Marquinia  
24"x24" Field Tile in Paonazzetto

Features	Test Method	Value	
Length and Width	ISO 10545-2	± 0.5% ± 2mm	
Thickness		± 5% ± 0.5mm	
Straightness of Sides		± 0.3% ± 1.5mm	
Rectangularity		± 0.3% ± 1.5mm	
Surface Flatness		± 0.3% ± 1.5mm	
Water Absorption	ISO 10545-3	E ≤ 0.1% Bla GL	
Modulus of Rupture	ISO 10545-4	R ≥ 35 N/mm <sup>2</sup>	
Breaking of Rupture		S ≥ 1300 N	
Abrasion Resistance	ISO 10545-7	Class 4	
Crazing Resistance	ISO 10545-11	Resistant	
Frost Resistance	ISO 10545-12	Resistant	
Resistance to Household Chemicals	ISO 10545-13	Class A-LA	
Resistance to Low Concentrations of Acids and Bases			
Stain Resistance	ISO 10545-14	Class 5	
Scratch Hardness (Mohs)	EN 101	Matte: ≥ 6 Polished: ≥ 5	
Slip Resistance		Matte	Polished
	DIN 51130	R10	-
	B.C.R.A. REP. CEC. 6/81	0.40 ≤ ≤ 0.74	-
	DIN 51097	Class C	Class B
	DCOF Acu Test	WET > 0.42	-

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

**Product Info:**

- Glazed Porcelain Tile
- Matte | Polished Finish
- 10mm Thicknesses
- Rectified Edge
- PEI Rating = 4
- V2 - Slight Shading Variation
- Frost Resistance = Yes





[www.genrose.com](http://www.genrose.com)