STATURE










12"x24" Field Tile | 2"x2" Mosaic in Onice Cream



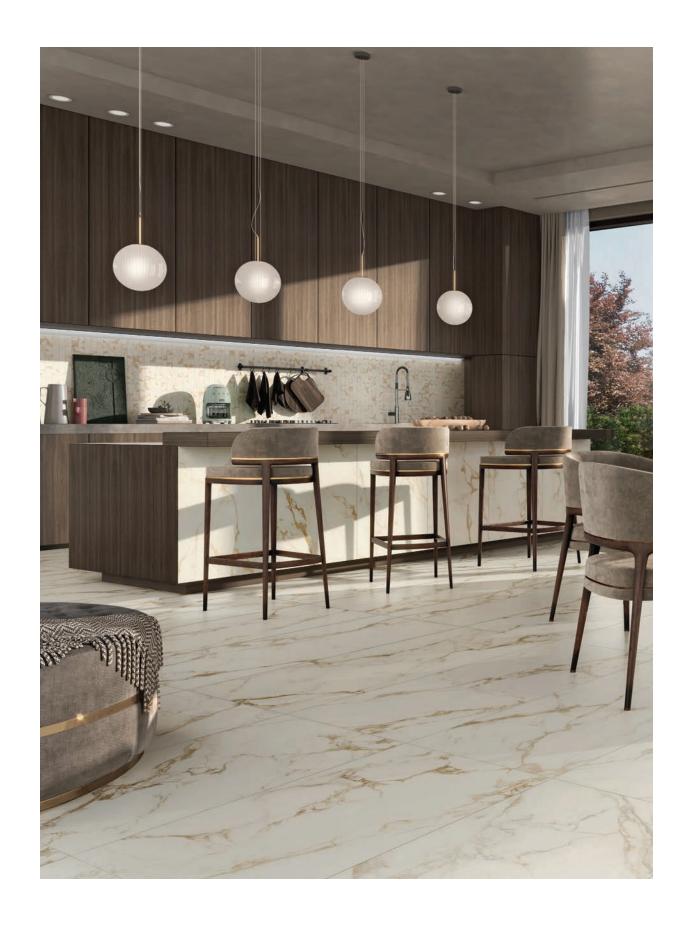

2"x2" Mosaic | 24"x48" Field Tile in Calacatta Gold






24"x48" Field Tile in Travertino White

AVAILABLE IN:

9mm Field Tiles				
SIZE	FINISH		COLORS	
12"×24"	Soft		Calacatta Gold Onice Cream Travertino White Imperiale Grey	
24"×48"	Soft		Calacatta Gold Onice Cream Travertino White Imperiale Grey	
3.75"x21.25" Chevron	Soft		Calacatta Gold Onice Cream Travertino White Imperiale Grey	
9mm Mosaic				
SHEET SIZE	ТҮРЕ	FINISH	COLORS	
12"×12"	2"x2" Mosaic	Soft	Calacatta Gold Onice Cream Travertino White Imperiale Grey	
9mm Trim Piece				
SHEET SIZE	ТҮРЕ	FINISH	COLORS	
3.75"×24"	Bullnose	Soft	Calacatta Gold Onice Cream Travertino White Imperiale Grey	

All Sizes are Nominal.



MADE TO ORDER FIELD TILES AND MOSAICS: Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to		2" 4"		1³/ ₈ ″x3″ 2″x4″
	a smaller size in any length and width	BRICKS		DIAMONDS	
	combination with a 1″ minimum.		1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4"				⁵ / ₈ "x4"
		OCTAGONS		HEXAGONS	
	6"		2″		1 1/ <i>U</i>
Chevron	2"x12" 6"x24"		w/ 0.6" Squares		1 ¹ / ₈ " 2"
TRAPEZOID W/ DOT		SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ ⁵ / ₈ " Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1″x2″ 1″x4″



Travertino White



Imperiale Grey

V4 🌇 Calacatta Gold



V3 🚺 Onice Cream



2"X2" MOSAIC





Calacatta Gold

Travertino White



Imperiale Grey



GENROSE

Features	Test Method	Value		
Water Absorption	ASTM C373	≤ 0.5		
Breaking Strength	ASTM C648	350 lbf 9 mm		
Deep Abrasion Resistance	ASTM C1243	145 mm ³		
Linear Thermal Expansion	ASTM C372	≤ 4.4 x 10-6 °F-1 ≤ 8x 10-6 °C-1		
Stain Resistance	ASTM C1378	A Resistant		
Chemical Resistance	ASTM C650	A Resistant		
Frost Resistance	ASTM C1026	Resistant		
Bond Strength	ASTM C482	≥ 50 PSI		
Flame Spread	ASTM E84	Class A		
Thermal Conductivity	EN 12524	= 1,3 W/m °K / 0.7 BTU/ft h °F		
DCOF (WET)	ANSI A326.3	≥ 0.42		
Recycled Material	-	40%		
	USGBC registered LEED pro	NGUARD® certified and will contribute to ojects. It will also contribute to the ANSI approved dard ICC 700. Low Emissions Material • Zero VOC		
	duct has a permanent Microban treatment o lew, and bacteria. The antimicrobial technol blied or activated and are registered with th	•		

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Note:

• This collection is suitable for Light Commercial

Product Info:

- Color Body Porcelain Tile •
- Soft Finish •
- 9mm Thickness •
- Rectified Edge •
- V3 Moderate Shading Variation (Imperiale Grey | Onice Cream)
- V4 Extreme Shading Variation (Travertino White | Calacatta Gold)
- Frost Resistance = Yes





STATURE Color Body Porcelain Tile

in the US and comply with the standards of the Biocidal Products Regulation (BPR) in Europe.





www.genrose.com



www.genrose.com