




Shown From the Left Panel to Right Panel and Top to Bottom:



True White in Polished



True White in Matte



Warm White in Polished



Warm White in Matte



Smoke in Polished



Smoke in Matte



Mica in Polished



Mica in Matte



Charcoal in Polished



Charcoal in Matte



24"x24" Field Tile in Mica



24"x24" Field Tile in Smoke



24"x24" Field Tile in Charcoal
24"x24" Field Tile in True White



24"x24" Field Tile in Warm White



24"x24" Field Tile in True White



12"x24" Field Tile in Charcoal

AVAILABLE IN:

Field Tile

- 24"x48" 9.5mm Matte | Polished Finish*
- 24"x24" 9mm Matte | Polished Finish
- 12"x24" 9mm Matte | Polished Finish
- 12"x12" 9mm Matte | Polished Finish

Mosaics

- 2"x2" Mosaic Matte Finish











Trim Pieces

- 3"x24" Bullnose Matte | Polished Finish


- All sizes are NOMINAL
 * 24"x48" is only available in True White

MADE TO ORDER FIELD TILES AND MOSAICS:


This represents a small portion of the mosaic patterns we offer.
 We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	8"x24" 6"x24" 6"x12" 4"x12"		3"x12" 8"x8" 6"x6" 4"x4"		2" 4"
			BRICKS		DIAMONDS
			1"x2" 1"x3" 1 3/8"x3" 2"x4"		1 3/8"x3" 2"x4"
FIELD SHAPES*			CHEVRONS		HERRINGBONE
 Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" 5/8"x4"
 Diamond	4"		OCTAGONS		HEXAGONS
 Hexagon	6"		2" w/ 0.6" Squares		1 1/8" 2"
 Chevron	2"x12" 6"x24"		SQUARES		RECTANGLES
	TRAPEZOID W/ DOT		1"x1" 1 3/8"x1 3/8" 3"x3"		1"x2" 1"x4"
	4"x2 1/2" w/ 5/8" Dot				


*Other sizes available upon request



True White

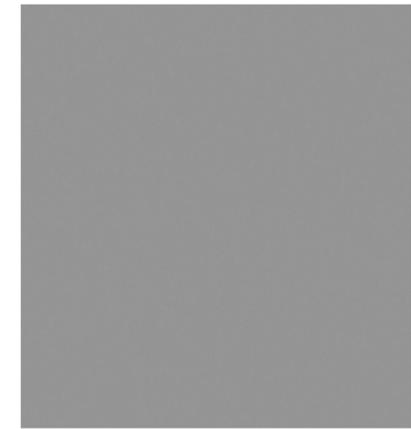


Smoke



Warm White



Mica



Charcoal

Colors shown may vary from actual product. Final selection should be made from actual product samples.

Features	Test Method	Value	
		Matte	Polished
Thickness		9mm – 0.35"	9mm – 0.35"
Water Absorption	ISO 10545-3 ASTM C-373	≤ 0.5%	≤ 0.5%
Deep Abrasion	ISO 10545-7 ASTM C-1027	136	135
Scratch Hardness		9	6
Breaking Strength	ISO 10545-4	≥ 450	≥ 450
	ASTM C648	≥ 500	≥ 450
Frost Resistance	ISO 10545-12	Resistant	Resistant
Chemical Resistance	ISO 10545-13	Class A - Res.	Class A - Res.
Stain Resistance	ISO 10545-14	Class 5	Class 5
	ASTM C1378	Class A	Class A
DCOF (Wet)	ANSI B101.3	> 0.42	< 0.42

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info for Charcoal | Warm White | Smoke | Mica:

- Unglazed Porcelain Tile
- Matte | Polished Finishes
- 9mm Thickness
- Rectified Edge
- V1 - Uniform Appearance
- Frost Resistance = Yes

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

Features	Test Method	Value	
		Matte	Polished
Thickness	All Other Tiles	9mm – 0.35"	9mm – 0.35"
	24"x48" Field Tile	9.5mm – 0.37"	9.5mm – 0.37"
Water Absorption	ISO 10545-3 ASTM C-373	≤ 0.5%	≤ 0.5%
Abrasion Resistance	ISO 10545-7 ASTM C1027	4	4
Scratch Hardness	All Other Tiles	9	6
	12"x12" Field Tile	5	5
Breaking Strength	ISO 10545-4 ASTM C648	≥ 450	≥ 450
Frost Resistance	ISO 10545-12 ASTM C1026	Resistant	Resistant
Chemical Resistance	ISO 10545-13 ASTM C650	Class A - Res.	Class A - Res.
Stain Resistance	ISO 10545-14	Class 5	Class 5
	ASTM C1378	Class A	Class A
DCOF (Wet)	ANSI B101.3 & A137.1-2017	≥ 0.42	< 0.42

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Product Info for True White:

- Glazed Porcelain Tile
- Matte | Polished Finishes
- 9mm | 9.5mm Thickness
- Rectified Edge
- PEI Rating = 4
- V1 - Uniform Appearance
- Frost Resistance = Yes

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.





www.genrose.com