

TONE





12"x12" Field Tile in Black



24"x24" Field Tile in White



24"x24" Field Tile in Snow



12"x12" Field Tile in Silver



12"x24" Field Tile in Cream | 24"x24" Field Tile in Cream

24"x24" Field Tile in Carbon

AVAILABLE IN:

| 10.5mm Field Tiles | | | |
|--------------------|------------------|----------|--|
| SIZE | EDGE | FINISH | COLORS |
| 12"x12" | Rectified | Natural | Snow White Cream Beige Dove Silver Grey Carbon Black |
| 12"x24" | Rectified | Natural | Snow White Cream Beige Dove Silver Grey Carbon Black |
| 24"x24" | Rectified | Natural | Snow White Cream Beige Dove Silver Grey Carbon Black |
| 10mm Field Tiles | | | |
| SIZE | EDGE | FINISH | COLORS |
| 12"x24" | Rectified | Polished | Snow Cream Beige Silver Carbon Black |
| 10.5mm Mosaics | | | |
| SIZE | FINISH | | COLORS |
| 2"x2" | Natural | | Snow White Cream Beige Dove Silver Grey Carbon Black |
| 10.5mm Trim Pieces | | | |
| SIZE | TYPE | FINISH | COLORS |
| 3"x12" | Bullnose | Natural | Snow White Cream Beige Dove Silver Grey Carbon Black |
| 6"x12" | Cove Base | Natural | Snow White Cream Beige Dove Silver Grey Carbon Black |
| 6"x1" | Cove Base Corner | Natural | Snow White Cream Beige Dove Silver Grey Carbon Black |
| 10mm Trim Pieces | | | |
| SIZE | TYPE | FINISH | COLORS |
| 3"x12" | Bullnose | Polished | Snow Cream Beige Silver Carbon Black |


















- All sizes are NOMINAL

MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.

This represents a small portion of the mosaic patterns we offer.

We can cut any field tile to create a custom mosaic or field tile size as specified.

| FIELD TILES | | CUBES | | BASKETWEAVE | | |
|---|---|---|--|---|---|--------------------|
|  | Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum. |  | 2" 4" |  | 1 3/8" x 3" 2" x 4" | |
|  | | BRICKS | | DIAMONDS | | |
| | |  | 1" x 2" 1" x 3" 1 3/8" x 3" 2" x 4" |  | 2" | |
| FIELD SHAPES* | | CHEVRONS | | HERRINGBONE | | |
|  | Half Hexagon |  | 2" x 12" |  | 1" x 2" 2" x 4" 5/8" x 4" | |
|  | Diamond | | | | | 4" |
|  | Hexagon |  | 2" w/ 0.6" Squares | HEXAGONS | | |
|  | Chevron | | | 2" x 12" 6" x 24" |  | 1 1/8" 2" |
| TRAPEZOID W/ DOT | | SQUARES | | RECTANGLES | | |
|  | 4" x 2 1/2" w/ 5/8" Dot |  | 1" x 1" 1 3/8" x 1 3/8" | 2" x 2" 3" x 3" |  | 1" x 2" 1" x 4" |

*Other sizes available upon request. - All sizes are NOMINAL



Snow



White



Cream



Beige



Dove



Silver



Grey



Carbon



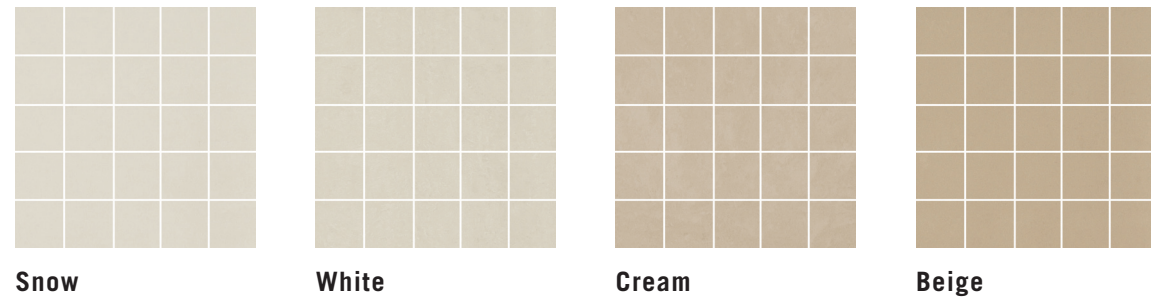
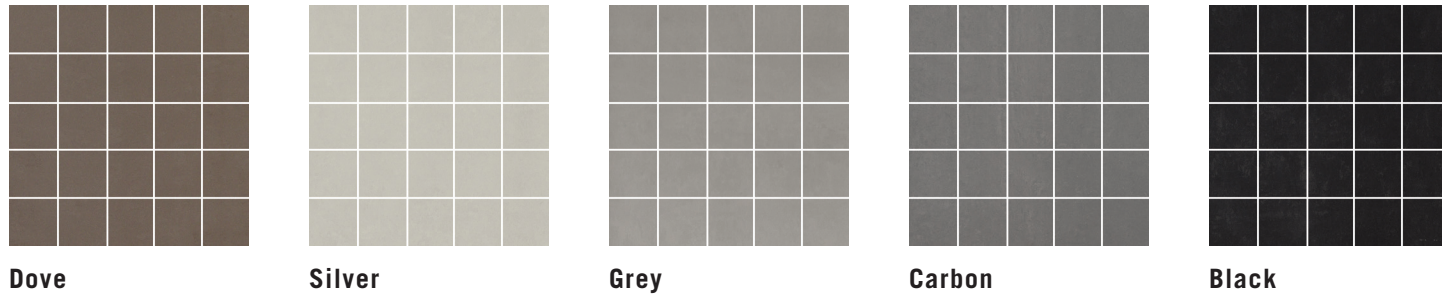
Black


Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.

2"X2" MOSAICS



TONE
Through Body Porcelain Tile



| Features | Test Method | Value | |
|---|---------------------------|---------------------------------|----------|
| Thickness | ASTM C-499 | max ± 0.030 inch | |
| Warpage Edge | ASTM C-485 | Conforms | |
| Warpage Diagonal | ASTM C-485 | Conforms | |
| Water Absorption | ASTM C-373 | ≤ 0.5% | |
| Breaking Strength | ASTM C-648 | ³510 lb _f average | |
| Bond Strength | ASTM C-482 ANSI A137.1 | Conforms ³ 50 PSI (0.34 MPa) | |
| Surface Hardness | Mohs Scale | 7 Mohs | |
| Coefficient of Linear Thermal Expansion | ASTM C-372 | Conforms | |
| Thermal Shock Resistance | ASTM C-484 | Conforms | |
| Frost Resistance | ASTM C-1026 | Resistant | |
| Chemical Resistance | ASTM C-650 | Conforms | |
| Stain Resistance | ASTM C-1378 | Conforms | |
| DCOF Dynamic Coefficient of Friction* | ASTM A326.3 | Natural | Polished |
| | | ≥0.42 | Fail |
| VOC Emissions | - | Zero VOC | |
|  This product is GREENGUARD® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700. Low Emissions Material • Zero VOC | | | |

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer:

DCOF wet and dry is different on every production lot and can vary. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Through Body Porcelain Tile
- Natural | Polished Finish
- 10mm (Polished) | 10.5mm (Natural) Thicknesses
- Rectified Edge
- PEI Rating = 5
- V2 - Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com

24"x24" Field Tile in Beige

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com