

**UPLAND**



For the most up-to-date product information, scan the QR code.

24" x 24" Paver in Bluestone



24" x 24" Paver in Brown Chestnut



24" x 24" Paver in Gypsum



24" x 24" Paver in Chrome



24" x 48" Paver in Pearl



24" x 24" Paver in TR Gold

## SPECIAL ORDER ITEMS:

20mm Paver - Rectified Edge			
SIZE	FINISH	COLORS	
24" x 24"	Grip	TR Gold   TR Silver   Sea Grey   Pearl   Grey   Gypsum   Bianco   Brown Chestnut   Grey Timber   White Pine   Chrome   Bluestone   Flagstone   Warm White   Fior Di Bosco   Cream   White   He Snow   He Silver	
24" x 48"	Grip	Bluestone   Chrome   Pearl	
20mm Trim Pieces - Rectified Edge			
SIZE	TYPE	FINISH	COLORS
12" x 24"	Round Step	Grip	TR Gold   TR Silver   Pearl   Grey   Gypsum   Sea Grey   Bluestone   Bianco   Chrome
	Round Step Corner Right		
	Round Step Corner Left		
	Stairtread Round Step		
	Stairtread Round Step Corner Right		
	Stairtread Round Step Corner Left		

All Sizes are Nominal.



24" x 24" Paver in White

## COLORS:



Warm White

White Pine

White

He Snow

Bianco




Gypsum

Chrome

Pearl

He Silver

Fior Di Bosco

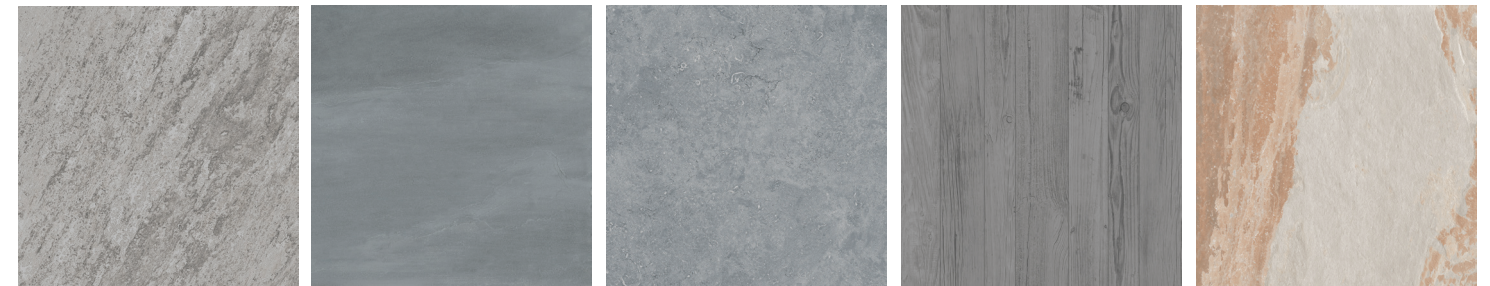

Grey

Bluestone

Sea Grey

Grey Timber

Flagstone



Cream

TR Gold

TR Silver

Brown Chestnut

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.







24" x 24" Paver in Bianco



**UPLAND**  
Porcelain Paver

Features	Test Method	Value
Length and Width	ASTM C499	Compliant
Surface Flatness		Compliant
Surface Quality		Min. 95% of tiles free of visible defects
Warpage	ASTM C485	Compliant
Wedging	ASTM C502	Compliant
Water Absorption	ASTM C373	≤ 0.5%
Modulus of Rupture / Bending Strength	ASTM C1500	Compliant
Breaking Strength	ASTM C648	≥ 2200 lbf.
Thermal Shock Resistance	ASTM C484	Resistant
Chemical Resistance (Domestic)	ASTM C650	UA
Chemical Resistance (Low Concentration)		UA
Chemical Resistance (High Concentration)		UA
Slip Resistance (DCOF)	ANSI A326.3	> 0.60
LEED	-	Yes
Environmental Product Declaration	-	Yes
Health Product Declaration	-	Certificate Available
Declare	-	Red List Free
Green Squared	-	Certified
VOC Emissions	-	Zero VOC





 This product will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.



**Disclaimer:** DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

- Product Info:**
- Porcelain Paver
  - Grip Finish
  - 20mm Thickness
  - Rectified Edge
  - V2 - Slight Variation
  - Frost Resistant



[www.genrose.com](http://www.genrose.com)

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



[www.genrose.com](http://www.genrose.com)