VICENZA






AVAILABLE SPECIAL ORDER ITEMS:

9mm Field Tile							
SIZE	FINISH		COLORS				
24"x 24"	Semi Polished		White Dark Grey				
Trim Piece							
SIZE	TYPE	FINISH	COLORS				
3"x 24"	Bullnose	Semi Polished	White Dark Grey				
			·				

- All sizes are NOMINAL



Bullnose


MADE TO ORDER FIELD TILES AND MOSAICS:

Minimum quantity required. Contact your sales representative for more information.


This represents a small portion of the mosaic patterns we offer. We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD	TILES	CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 ³ / ₈ "x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4"
Diamond	4″			$\sim \lor \lor \lor \lor$	⁵ /8"x4"
		OCTAGONS		HEXAGONS	
Hexagon	6"		0.11		
Chevron	2"×12" 6"×24"		2" w/ 0.6" Squares		1 ¹ /8" 2"
TRAPEZO	ID W/ DOT	SQUARES		RECTANGLES	
	4"x21/2" w/ ⁵ /8" Dot		1"x1" 2"x2" 1 ³ / ₈ "x1 ³ / ₈ " 3"x3"		1″×2″ 1″×4″

*Other sizes available upon request

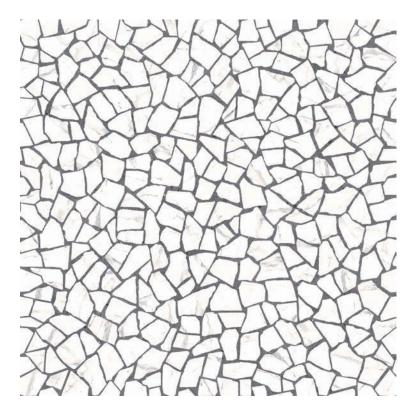

White

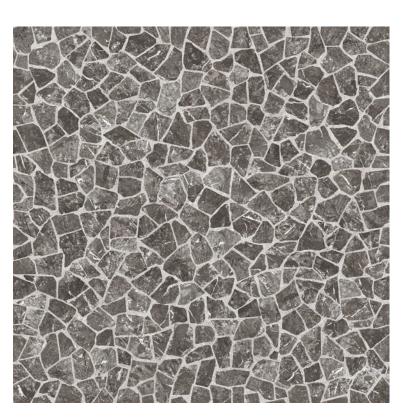


Dark Grey

Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.





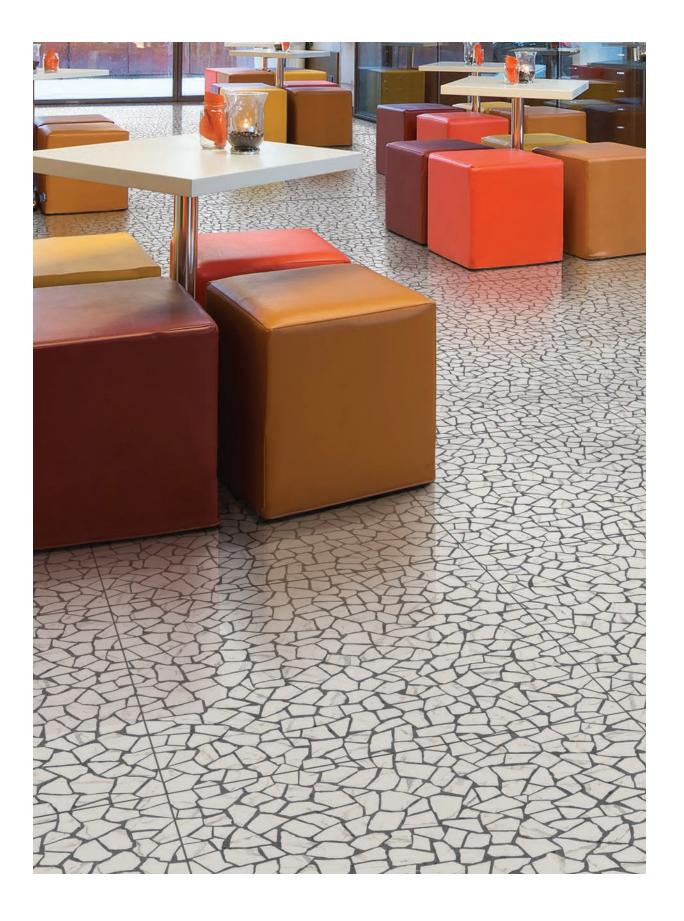



Features	Test Method	Value			
Water Absorption	ISO 10545-3	≤ 0.5%			
Breaking Strength	ISO 10545-4	≥ 425 lbs			
Surface Hardness (Mohs)	-	7			
Abrasion Resistance	ISO 10545-7	Class 3			
Thermal Shock Resistance	-	Resistant			
Chemical Resistance	ISO 10545-13	Class D			
Frost Resistance	ISO 10545-12	Resistant			
ANSI Classification	-	IW+			
DCOF (WET)	ANSI B101.3	≈ 0.63			
Recycled Material	-	12-16%			
This product is GREEN-SQUARED® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700. Low Emissions Material • Zero VOC					

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.



Product Info:

•

- Glazed Porcelain Tile
- Semi Polished Finish
- 9mm Thickness
 - Rectified Edge
- PEI Rating = 3 •
- V3 Moderate Variation
- Frost Resistance = Yes
- **V3** Moderate variation is inherent in this tile.





All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.

www.genrose.com



www.genrose.com