



For the most up-to-date product information, scan the QR code.

2" x 18" Floor/ Wall Tile in White | Beige



2"x 18" Field Tile in Acquamarine





2" x 18" Field Tile in Blue



2"x 18" Field Tile in Sky



2"x 18" Field Tile in White and Beige



AVAILABLE STOCKED ITEMS:

9.5mm Field Tiles - Pressed Edge			
SIZE	FINISH		COLORS
2"x 18"	Polished		White Ivory Light Grey Beige Acquamarine Sky Blue
Trim Pieces - Pressed Edge			
SIZE	TYPE	FINISH	COLORS
0.2"x18"	Finishing Strip	Polished	White Ivory Light Grey Beige Acquamarine Sky Blue

AVAILABLE SPECIAL ORDER ITEMS:

9.5mm Field Tiles - Pressed Edge			
SIZE	FINISH		COLORS
2" x 18"	Matte		White Ivory Light Grey Beige Sky Blue
Trim Pieces - Pressed Edge			
SIZE	TYPE	FINISH	COLORS
0.2" x 18"	Finishing Strip	Matte	White Ivory Light Grey Beige Sky Blue

All Sizes are Nominal.



2"x 18" Field Tile in Ivory

COLORS:



White



Ivory




Light Grey




Beige



Aquamarine

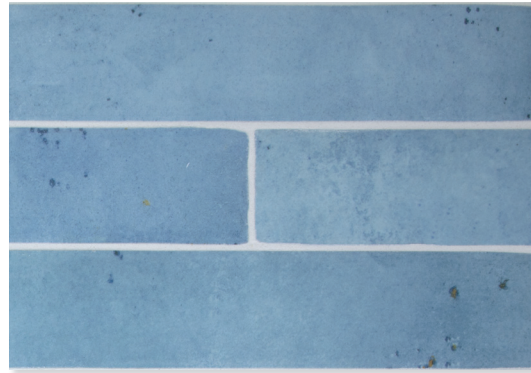

Sky

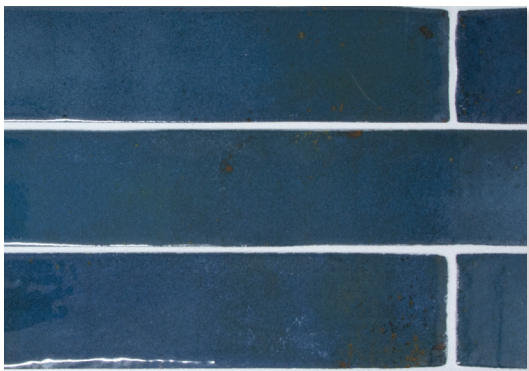

Blue

Colors shown may vary from actual product. Final selection should be made from actual product samples.
Products and availability are subject to change, please refer to our website for the most up to date selection.



2"x 18" Field Tile in Light Grey

Features	Test Method	Value	
Length and Width	ISO 10545 - 2	$\pm 0.3\% \pm 1.0\text{mm}$	
Thickness		$\pm 5\% \pm 0.5\text{mm}$	
Straightness of Sides		$\pm 0.3\% \pm 0.8\text{mm}$	
Rectangularity		$\pm 0.3\% \pm 1.5\text{mm}$	
Flatness		$\pm 0.4\% \pm 1.8\text{mm}$	
Surface Quality		Min. 95% of tiles free of visible defects	
Water Absorption	ISO 10545 - 3	< 0.2%	
Modulus of Rupture	ISO 10545 - 4	> 45 N/mm ²	
Breaking Strength		$\geq 700 \text{ N}$	
Coefficient of Linear Thermal Expansion	ISO 10545 - 8	$\alpha \leq 7 \times 10^{-6} \text{ C}^{-1}$	
Thermal Shock Resistance	ISO 10545 - 9	Resistant	
Crazing Resistance	ISO 10545 - 11	Resistant	
Chemical Resistance (Domestic)	ISO 10545 - 13	A	
Chemical Resistance (Low Concentration)		HA	
Chemical Resistance (High Concentration)		LA	
Reaction to Fire	UNI EN 13501	A1 _{FL}	
Slip Resistance (Wet)	ANSI A326.3	Matte	Polished
		DCOF 0.62	Does Not Pass
LEED	-	Yes	
Recycled Content	-	$\geq 30\%$	
Environmental Product Declaration	-	Yes	
VOC Emissions	-	Zero VOC	
Material Health Certification	-	Red List Free, Certificate Available	





This product will contribute to USGBC registered LEED projects.
 It will also contribute to the ANSI approved NAHB Green Building Standard ICC 700.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tile in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

Disclaimer: DCOF wet and dry is different on every production lot and can vary. This number represents the average DCOF of the tested production lots. If the spec listed is over the minimum standard, it will meet the requirement.

Product Info:

- Glazed Porcelain Tile
- Polished | Matte Finishes
- 9.5mm Thickness
- Pressed Edge
- PEI = 3 - Blue
- 4 - Beige | Aquamarine | Sky
- 5 - White | Light Grey | Ivory
- V2 - Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com

Contact your sales representative for more information. All material must be inspected prior to installation. Absolutely no claims will be accepted after installation.



www.genrose.com