

CARRARA

 **GENROSE**





12"x12" | 24"x24" Field Tile



AVAILABLE IN:


Field Tiles

Rectified Edge

- 3"x6" Honed | Polished Finish
- 6"x6" Honed | Polished Finish
- 12"x12" Honed | Polished Finish
- 12"x24" Honed | Polished Finish

Trim Pieces

3"x12" Bullnose Honed | Polished Finish









Mosaic

2"x2" Mosaic Honed | Polished Finish


- All sizes are NOMINAL

MADE TO ORDER FIELD TILES AND MOSAICS:

This represents a small portion of the mosaic patterns we offer.
We can cut any field tile to create a custom mosaic or field tile size as specified.

FIELD TILES		CUBES		BASKETWEAVE	
	Any 24" field tile can be cut down to a smaller size in any length and width combination with a 1" minimum.		2" 4"		1 ³ / ₈ "x3" 2"x4"
		BRICKS		DIAMONDS	
			1"x2" 1"x3" 1 ³ / ₈ "x3" 2"x4"		2"
FIELD SHAPES*		CHEVRONS		HERRINGBONE	
 Half Hexagon	6.7" Base		2"x12"		1"x2" 2"x4" 5/8"x4"
 Diamond	4"	OCTAGONS		HEXAGONS	
 Hexagon	6"		2" w/ 0.6" Squares		1 ¹ / ₈ " 2"
 Chevron	2"x12" 6"x24"	SQUARES		RECTANGLES	
	4"x2 ¹ / ₂ " w/ 5/8" Dot		1"x1" 1 ³ / ₈ "x1 ³ / ₈ "		1"x2" 1"x4"

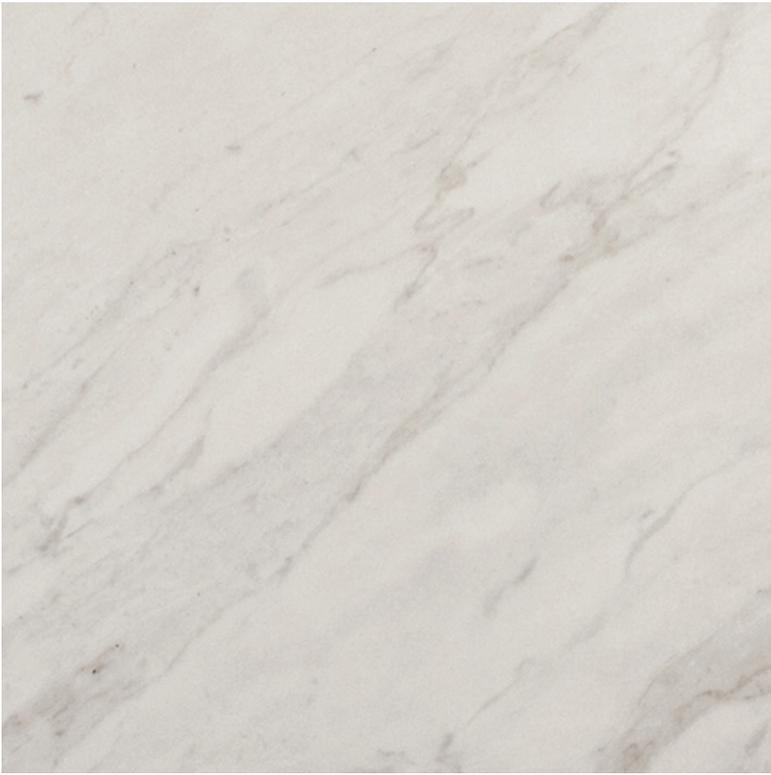*Other sizes available upon request



Carrara



12"x12" Field Tile

Features	Test Method	Value	
Water Absorption	ASTM C373	0.07%	
Breaking Strength	ASTM C648	403 lbf	
Chemical Resistance	ASTM C650	Class A	
Visible Abrasion Resistance (PEI)	ASTM C1027	Honed	Polished
		5	3
Dynamic C.O.F. (Honed)	BOT 3000	0.45	
MOHS	-	7	
DCOF (WET)	ANSI B101.3	≥ 0.45	
Recycled Material	-	≥ 30%	




This product is GREENGUARD® certified and will contribute to USGBC registered LEED projects. It will also contribute to the ANSI approved NAHB Green Building Standard ICC 70.

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.



Product Info:

- Glazed Porcelain Tile
- Honed | Polished Finish
- Rectified Edge
- PEI Rating = Honed (5) | Polished (3)
- V2 - Slight Shading Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com