CINDER











4"x 8" Field Tile in North End 6" x 7" Hexagon Field Tile in North End 4"x 8" Field Tile in Southie 6" x 7" Hexagon Field Tile in Southie

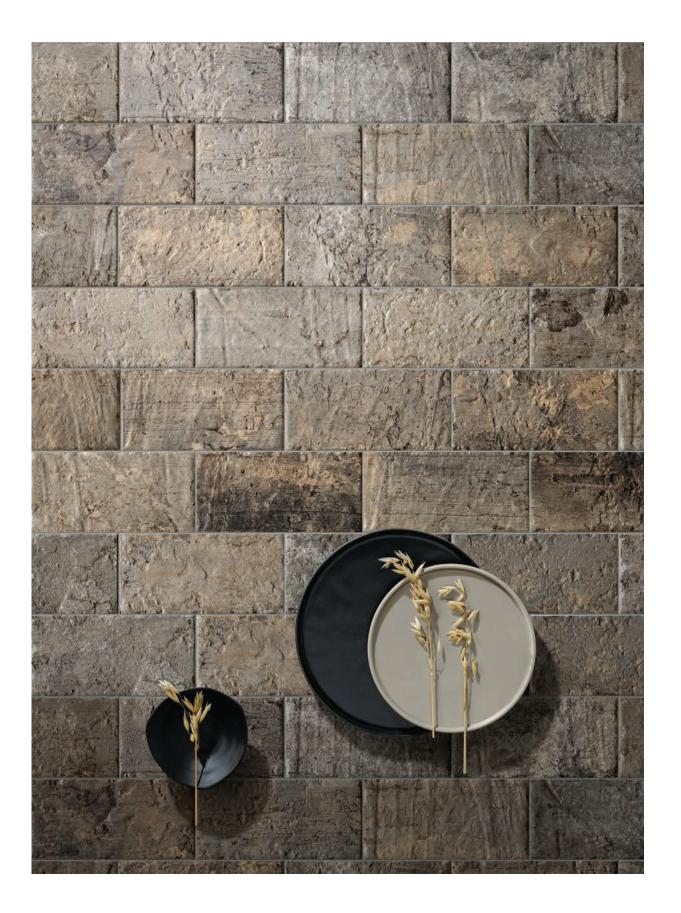

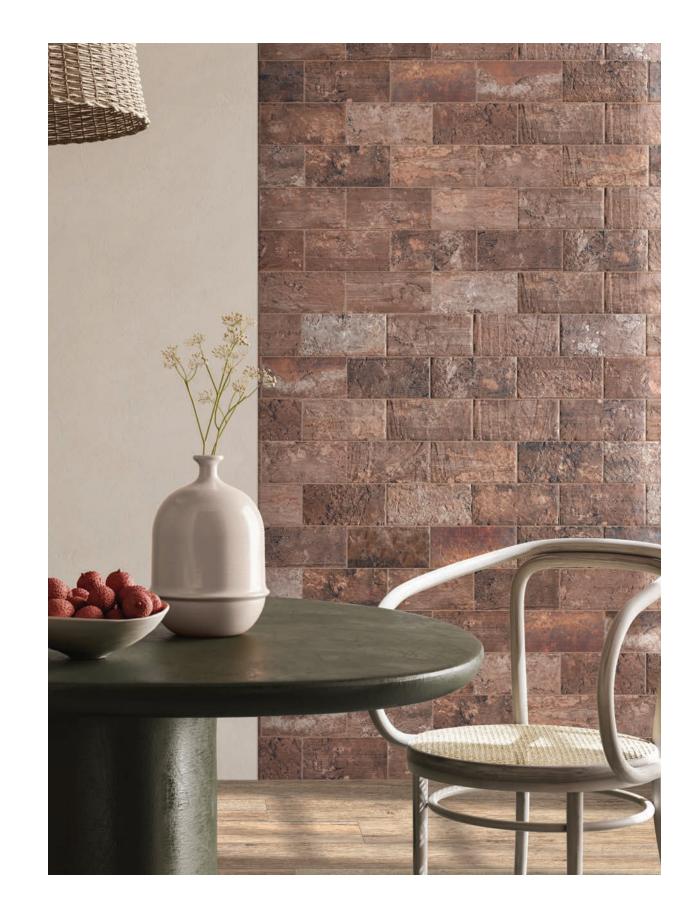

4"x 8" Field Tile in Revere






4" x 8" Field Tile in Revere 6" x 7" Hexagon Field Tile in Seaport 4"x 8" Field Tile in Seaport 6" x 7" Hexagon Field Tile in Seaport

AVAILABLE STOCKED ITEMS:

10mm Field Tiles			
SIZE	FINISH	COLORS	
4"× 8"	Natural	Back Bay North End Revere Seaport Southie	
6"x 7" Hexagon	Natural	Back Bay North End Revere Seaport Southie	

All Sizes are Nominal.

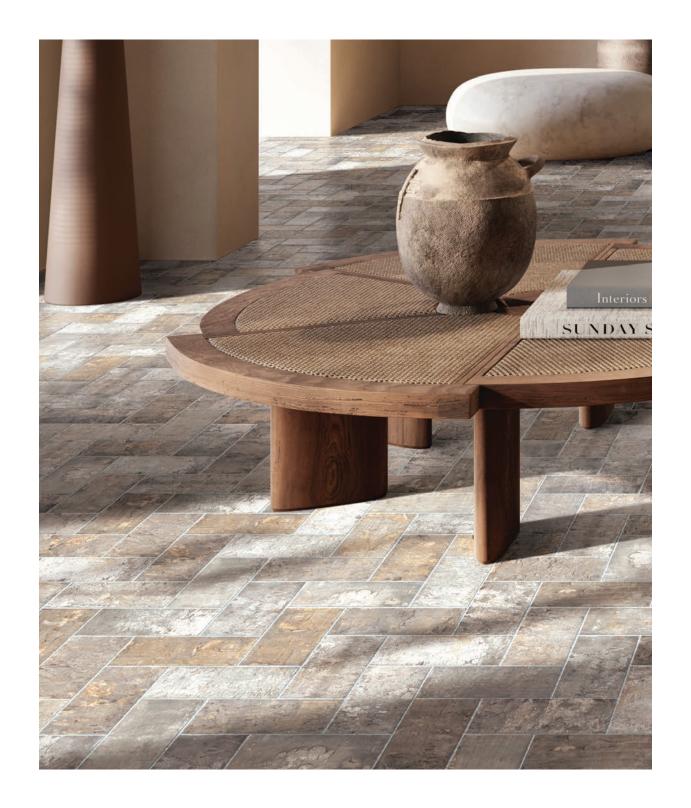





Seaport

Southie







Revere

Back Bay

V4 - EXTREME variation is inherent in this tile. Colors shown may vary from actual product. Final selection should be made from actual product samples. Products and availability are subject to change, please refer to our website for the most up to date selection.






North End





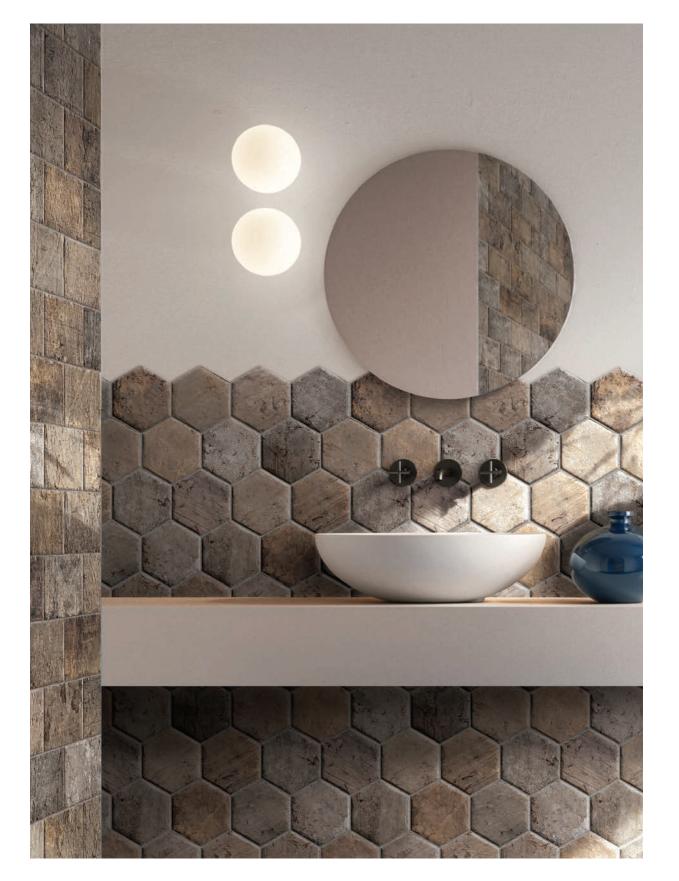

4"x 8" Field Tile in Back Bay 6" x 7" Hexagon Field Tile in Back Bay



Features	Test Method	Value
Length and Width	ISO 10545-2	± 0.5% ± 2mm
Thickness		± 5% ± 0.5mm
Straightness of Sides		± 0.5% ± 2mm
Rectangularity		± 0.5% ± 2mm
Ourface Flatence		± 0.5% max ± 2mm
Surface Flatness	ASTM C 485	Warpage - Diagonal/Edge ± 0.4%
Water Absorption	ISO 10545-3	E ≤ 0.3% Bla GL
Duralian Drawath	ISO 10545-4	R ≥ 35 N/mm ²
Bending Strength		S ≥ 1300 N
Thermal Shock	ISO 10545-9	Resistant
Crazing	ISO 10545-11	Resistant
Scratch Hardness (MOHS)	EN 101	> 6
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance	ISO 10545-13	Class GLA
Household Chemical Resistance		Class GA
Stain Resistance	ISO 10545-14	Class 5
DCOF (Wet)	ASTM C 1028	0.72
Recycled Material	-	20%

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.



Product Info:

- Glazed Porcelain Tile
- Natural Finish
- 10mm Thickness
- Pressed Edge
- PEI Rating = 4
- Frost Resistance = Yes
- V4 **EXTREME** Variation

CINDER Glazed Porcelain Tile



www.genrose.com



www.genrose.com