## **DAHLIA**









9"x47" Field Tile in Miel


## **AVAILABLE IN:**

## 9.7mm Field Tile

Rectified Edge

9"x47" Matte Finish

- All sizes are NOMINAL

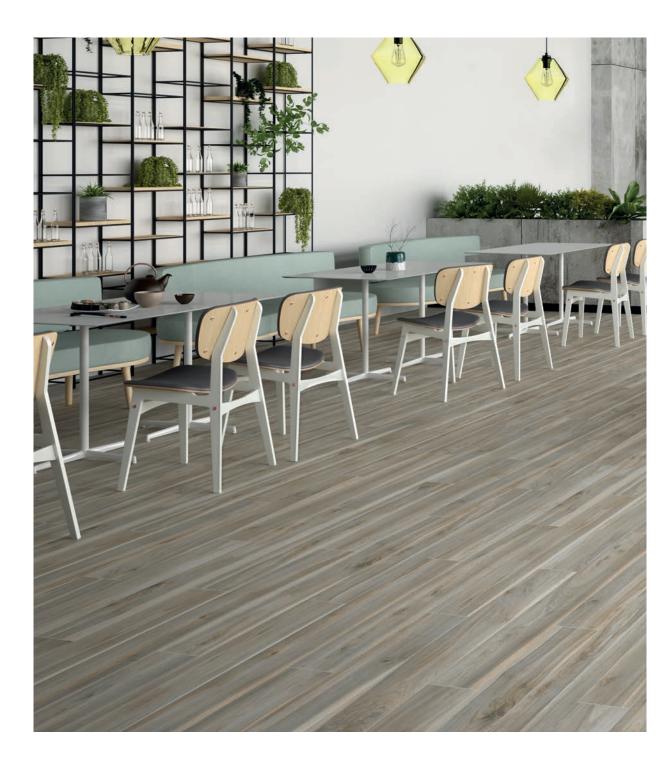






White Natural





Grey Miel

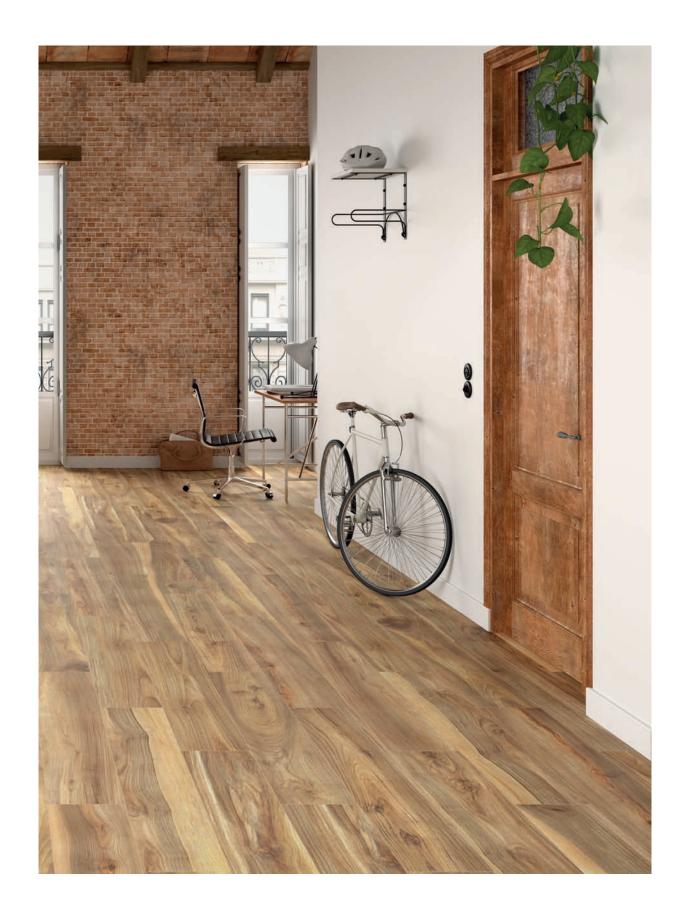





	T	
Features	Test Method	Value
Water Absorption	ISO 10545-3	≤ 0.5%
Breaking Strength	ISO 10545-4	> 1300 N
Bending Strength	ISO 10545-4	> 35 N/mm²
Surface Abrasion	ISO 10545-7	4 (White   Natural   Gray) 3 (Miel)
Cracking Resistance	ISO 10545-11	Resistant
Frost Resistance	ISO 10545-12	Resistant
Chemical Resistance	ISO 10545-13	Minimum GB
Resistance to Acid and Alkaline	ISO 10545-13	GHA
Resistance to Stains	ISO 10545-14	Minimum Class 3
DCOF (WET)	ANSI A137. 1:2012. 9.6	> 0.42
Hardness (MOHS)	EN 101	Minimum 3

According to ANSI and MIA standards, depending on the type and size of tile, it is recommended to have at least a 1/8" wide grout joint for floor tiles in order to be able to fill the grout joint full and never less than 1/16" wide. Please refer to TCNA guidelines for more on grout recommendations.

## **Product Info:**

- Glazed Porcelain Tile
- Matte Finish
- 9.7mm Thickness
- Rectified Edge
- PEI Rating = 4 (White | Natural | Grey) 3 (Miel)
- V3 Moderate Variation
- Frost Resistance = Yes



www.genrose.com



www.genrose.com